



One Identity Manager 8.2

IT Shop Administration Guide

**Copyright 2021 One Identity LLC.**

**ALL RIGHTS RESERVED.**

This guide contains proprietary information protected by copyright. The software described in this guide is furnished under a software license or nondisclosure agreement. This software may be used or copied only in accordance with the terms of the applicable agreement. No part of this guide may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording for any purpose other than the purchaser's personal use without the written permission of One Identity LLC.

The information in this document is provided in connection with One Identity products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of One Identity LLC products. EXCEPT AS SET FORTH IN THE TERMS AND CONDITIONS AS SPECIFIED IN THE LICENSE AGREEMENT FOR THIS PRODUCT, ONE IDENTITY ASSUMES NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTY RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT SHALL ONE IDENTITY BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, BUSINESS INTERRUPTION OR LOSS OF INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS DOCUMENT, EVEN IF ONE IDENTITY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. One Identity makes no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. One Identity does not make any commitment to update the information contained in this document.

If you have any questions regarding your potential use of this material, contact:

One Identity LLC.  
Attn: LEGAL Dept  
4 Polaris Way  
Aliso Viejo, CA 92656

Refer to our Web site (<http://www.OneIdentity.com>) for regional and international office information.

**Patents**

One Identity is proud of our advanced technology. Patents and pending patents may apply to this product. For the most current information about applicable patents for this product, please visit our website at <http://www.OneIdentity.com/legal/patents.aspx>.

**Trademarks**

One Identity and the One Identity logo are trademarks and registered trademarks of One Identity LLC. in the U.S.A. and other countries. For a complete list of One Identity trademarks, please visit our website at [www.OneIdentity.com/legal](http://www.OneIdentity.com/legal). All other trademarks are the property of their respective owners.

**Legend**

 **WARNING:** A WARNING icon highlights a potential risk of bodily injury or property damage, for which industry-standard safety precautions are advised. This icon is often associated with electrical hazards related to hardware.

 **CAUTION:** A CAUTION icon indicates potential damage to hardware or loss of data if instructions are not followed.

One Identity Manager IT Shop Administration Guide  
Updated - 24 November 2021, 09:53  
Version - 8.2

# Contents

<b>Setting up an IT Shop solution</b>	<b>11</b>
One Identity Manager users in the IT Shop	12
Implementing the IT Shop	14
Using the IT Shop with the Web Portal for Application Governance	16
Requestable products	16
Multi-request resources	19
Preparing products for requesting	21
Entering service items	22
General main data of a service item	23
Pricing information	26
Extended main data of a service item	26
Default service items	26
Additional tasks for managing service items	26
Specifying product dependencies	33
Reports about service items	34
Entering service categories	35
Service category main data	36
Default service categories	37
Additional tasks for managing service categories	37
Entering product-specific request properties	39
Request property and request parameter settings	41
Copy request properties	45
Request properties overview	45
Products for requests with time restrictions	46
Product request on customer or product relocation	46
Non-requestable products	48
Entering terms of use	48
Additional tasks for terms of use	49
Entering tags	50
Additional tasks for tags	51
Assigning and removing products	51

Assigning products to shelves .....	53
Removing products from shelves .....	54
Moving products to another shelf .....	55
Replacing products .....	55
Preparing the IT Shop for multi-factor authentication .....	56
Using multi-factor authentication for requests .....	56
Assignment requests and delegating .....	57
Standard products for assignment requests and delegation .....	58
Requesting memberships in business roles .....	59
Requesting memberships in application roles .....	60
Customizing assignment requests .....	62
Preparing for delegation .....	63
Canceling assignments and delegations .....	64
Removing customers from a shop .....	64
Setting up assignment resources .....	66
General main data of an assignment resource .....	66
Default assignment resources .....	68
Additional tasks for managing assignment resources .....	68
Creating IT Shop requests from existing user accounts, assignments, and role memberships .....	69
Creating requests for employees .....	71
Creating user account requests .....	72
Creating workdesk requests .....	73
Creating assignment requests .....	74
Adding Active Directory and SharePoint groups to the IT Shop automatically .....	75
Deleting unused application roles for product owners .....	78
Adding Privileged Account Management user groups to the IT Shop automatically .....	78
<b>Approval processes for IT Shop requests .....</b>	<b>80</b>
Approval policies for requests .....	80
General main data of approval policies .....	81
Default approval policies .....	82
Additional tasks for approval policies .....	82
The approval policy overview .....	82
Adding to the IT Shop .....	83
Validity checking .....	83

Editing approval workflows .....	83
Approval workflows for requests .....	84
Working with the workflow editor .....	84
Setting up approval workflows .....	87
Editing approval levels .....	88
Editing approval steps .....	89
Properties of an approval step .....	89
Connecting approval levels .....	94
Additional tasks for approval workflows .....	95
The approval workflow overview .....	95
Copying approval workflows .....	95
Deleting approval workflows .....	96
Default approval workflows .....	96
Determining the effective approval policies .....	97
Approvers for renewals .....	98
Approvers for unsubscriptions .....	98
Selecting responsible approvers .....	99
Default approval procedures .....	99
Self-service .....	103
Using IT Shop structures to find approvers .....	103
Using request recipients to find approvers .....	104
Using specific roles to find approvers .....	105
Using requested products to find approvers .....	105
Using approval roles to find approvers .....	107
Using cost centers to find approvers .....	109
Using departments to find approvers .....	110
Using requested roles to find approvers .....	110
Waiting for further approval .....	111
Calculated approval .....	112
Approvals to be made externally .....	113
Finding requesters .....	115
Setting up approval procedures .....	115
General main data of an approval procedure .....	116
Queries for approver selection .....	117
Copying an approval procedure .....	119

Deleting approval procedures .....	120
Determining the responsible approvers .....	120
Request risk analysis .....	122
Testing requests for rule compliance .....	123
Compliance checking requests .....	124
Identifying rule violations .....	125
Finding exception approvers .....	126
Restricting exception approvers .....	129
Setting up exception approver restrictions .....	130
Explicit exception approval .....	131
Rule checking for requests with self-service .....	132
Approving requests from an approver .....	132
Setting up approver restrictions .....	134
Automatically approving requests .....	134
Configuring automatic approval .....	136
Approval by peer group analysis .....	137
Configuring peer group analysis for requests .....	138
Gathering further information about a request .....	139
Appointing other approvers .....	140
Escalating an approval step .....	141
Approvers cannot be established .....	143
Automatic approval on timeout .....	144
Halting a request on timeout .....	146
Approval by the chief approval team .....	148
Approving requests with terms of use .....	149
Using default approval processes .....	150
<b>Request sequence .....</b>	<b>154</b>
The request overview .....	156
Displaying request details .....	156
Displaying the approval sequence .....	156
Displaying the approval history .....	157
Requesting products more than once .....	158
Requests with limited validity period .....	159
Renewing requests .....	160
Canceling or unsubscribing requests .....	161

Checking request validity periods .....	161
Relocating a customer or product to another shop .....	163
Changing approval workflows of pending requests .....	163
Requests for employees .....	165
Requesting change of manager for an employee .....	165
Canceling requests .....	167
Unsubscribe products .....	168
Notifications in the request process .....	168
Demanding an approval decision .....	169
Reminding approvers .....	169
Scheduled demand for approval .....	171
Sequence for limited requests .....	171
Approving or denying request approval .....	172
Notifying delegates .....	172
Canceling requests .....	174
Escalating requests .....	174
Delegating approvals .....	175
Rejecting approvals .....	175
Notifications with questions .....	175
Using additional approvers to approve requests .....	176
Unsubscribing approved requests .....	177
Renewing approved requests .....	177
Product change notifications .....	177
Default mail templates .....	178
Bulk delegation notifications .....	178
Approval by mail .....	178
Editing approval emails .....	181
Allowing approval decisions using the Starling 2FA app .....	182
Requests with limited validity period for changed role memberships .....	183
Requests from permanently inactive employees .....	184
Deleting requests .....	184
<b>Managing an IT Shop .....</b>	<b>186</b>
IT Shop base data .....	186
Processing status .....	188
Standard reason for requests .....	189

Predefined standard reasons for requests .....	190
Role classes for the IT Shop .....	191
Role types for the IT Shop .....	192
Business partners .....	192
Functional areas .....	194
Chief approval team .....	195
Product owners .....	196
Attestors .....	197
Setting up IT Shop structures .....	198
Adding IT Shop structures .....	199
General main data of IT Shop structures .....	199
Custom main data of IT Shop structures .....	201
Additional tasks for IT Shop structures .....	202
The IT Shop structure overview .....	202
Assigning approval policies .....	202
Assigning requestable products to shelves .....	203
Setting up a customer node .....	204
Adding customer nodes .....	204
General main data of customer nodes .....	204
Custom main data of customer nodes .....	205
Additional tasks for customer nodes .....	205
The entitled customers overview .....	205
Assigning employees directly .....	206
Assigning employees through dynamic roles .....	206
Deleting IT Shop structures .....	208
Deleting customer nodes .....	208
Deleting shelves .....	208
Deleting shops .....	209
Deleting shopping centers .....	210
Templates for automatically filling the IT Shop .....	210
Using shelf templates in an IT Shop solution .....	213
Editing shelf templates .....	214
General main data of a shelf template .....	214
Custom main data of shelf templates .....	215
Additional tasks for shelf templates .....	215



Assigning approval policies .....	216
Assigning requestable products to shelf templates .....	216
Shelf-filling wizard .....	217
Assigning shelf templates to shops and shopping center templates .....	217
Deleting shelf templates .....	218
Custom mail templates for notifications .....	220
Creating and modifying IT Shop mail templates .....	220
General properties of mail templates .....	221
Creating and editing mail definitions .....	222
Using base object properties .....	223
Use of hyperlinks to the Web Portal .....	224
Default functions for creating hyperlinks .....	225
Customize email signatures .....	226
Copying IT Shop mail templates .....	227
Displaying IT Shop mail template previews .....	227
Deleting IT Shop mail templates .....	227
Custom notification processes .....	228
Request templates .....	228
Creating and modifying request templates .....	228
General main data of a request template .....	229
Cart items .....	230
Deleting request templates .....	230
Recommendations and tips for transporting IT Shop components with the Database Transporter .....	231
<b>Troubleshooting errors in the IT Shop .....</b>	<b>232</b>
Timeout on saving requests .....	232
Bulk delegation errors .....	233
Process monitoring for requests .....	233
<b>Appendix: Configuration parameters for the IT Shop .....</b>	<b>235</b>
<b>Appendix: Request statuses .....</b>	<b>245</b>
<b>Appendix: Examples of request results .....</b>	<b>247</b>
<b>About us .....</b>	<b>250</b>
Contacting us .....	250
Technical support resources .....	250


**Index .....251**

## Setting up an IT Shop solution

The IT Shop allows users to request company resources such as software, system roles, or group membership as well as non-IT resources such as mobile telephones or keys. Furthermore, membership of a hierarchical role (department, location, cost center, or business role) can be requested through the IT Shop. The requests are processed by a flexible policy-based approval process. Introducing the IT Shop avoids time-consuming demands within the company and reduces the administration effort. The request history makes it possible to follow who requested which company resource or hierarchical role and when it was requested, renewed, or canceled.

Shops, shelves, customers, and products all belong to an IT Shop solution. Several shops can be grouped together into shopping centers. The shelves are assigned company resources in the form of products. Products can be grouped into service categories. All the service categories are summarized in a service catalog. Customers can select products from a service catalog in the Web Portal, add them to a cart, and send a purchase request. The following figure shows an example of a service catalog with service categories.

**Figure 1: Example of a service catalog**



Requests follow a defined approval process that determines whether a product may be assigned or not. Products can be renewed or canceled. Approval processes can also be specified for renewals and cancellations. Approval policies are defined for approval processes. The approval policies are assigned to approval workflows for product requests, renewals, or cancellations.

**Figure 2: Example of a simple approval workflow**



The products are requested, renewed, and canceled through the Web Portal. Authorized employees have the option to approve requests and cancellations. For detailed information, see the *One Identity Manager Web Designer Web Portal User Guide*.

## One Identity Manager users in the IT Shop

The following users are involved in the setting up and operating of an IT Shop system.

**Table 1: Users**

Users	Tasks
Administrators for the IT Shop	<p>Administrators must be assigned to the <b>Request &amp; Fulfillment   IT Shop   Administrators</b> application role.</p> <p>Users with this application role:</p> <ul style="list-style-type: none"><li>• Create the IT Shop structure with shops, shelves, customers, templates, and service catalog.</li><li>• Create approval policies and approval workflows.</li><li>• Specify which approval procedure to use to find attestors.</li><li>• Create products and service items.</li><li>• Set up request notifications.</li></ul>

Users	Tasks
	<ul style="list-style-type: none"> <li>• Monitor request procedures.</li> <li>• Administrate application roles for product owners and attestors.</li> <li>• Set up other application roles as required.</li> <li>• Create extended properties for company resources of any type.</li> <li>• Edit the resources and assign them to IT Shop structures.</li> <li>• Assign system entitlements to IT Shop structures.</li> </ul>
Product owners	<p>Product owners must be assigned to the <b>Request &amp; Fulfillment   IT Shop   Product owners</b> application role or a child application role.</p> <p>Users with this application role:</p> <ul style="list-style-type: none"> <li>• Approve through requests.</li> <li>• Edit service items and service categories under their management.</li> </ul>
One Identity Manager administrators	<p>One Identity Manager administrator and administrative system users Administrative system users are not added to application roles.</p> <p>One Identity Manager administrators:</p> <ul style="list-style-type: none"> <li>• Create customized permissions groups for application roles for role-based login to administration tools in the Designer as required.</li> <li>• Create system users and permissions groups for non role-based login to administration tools in the Designer as required.</li> <li>• Enable or disable additional configuration parameters in the Designer as required.</li> <li>• Create custom processes in the Designer as required.</li> <li>• Create and configure schedules as required.</li> </ul>
Role approver	<ul style="list-style-type: none"> <li>• Request approval in the Web Portal.</li> </ul> <p>Approvers are determined through approval processes.</p>
Attestors for requests	<p>Attestors must be assigned to the <b>Request &amp; Fulfillment   IT Shop   Attestors</b> application role.</p> <p>Users with this application role:</p> <ul style="list-style-type: none"> <li>• Attest correct assignment of company resource to IT Shop structures for which they are responsible.</li> <li>• Attest objects that have service items assigned to them.</li> <li>• Can view main data for these IT Shop structures but not edit them.</li> </ul>

Users	Tasks
	<p><b>NOTE:</b> This application role is available if the Attestation Module is installed.</p>
Chief approval team	<p>Chief approvers must be assigned to the <b>Request &amp; Fulfillment   IT Shop   Chief approval team</b> application role.</p> <p>Users with this application role:</p> <ul style="list-style-type: none"> <li>• Approve through requests.</li> <li>• Assign requests to other approvers.</li> </ul>

## Implementing the IT Shop

**Identity & Access Lifecycle** is already included in the default installation of One Identity Manager. This shop contains several shelves that have standard products assigned to them. You can use these products to request role or group memberships, for example, or to delegate duties. All active employees automatically become members of this shop and can therefore make requests.

You can use the **Identity & Access Lifecycle** shop to request standard products. Default approval policies are implemented for approving these requests. You can request any company resources you like by taking the default shop and extending it with your own shelves or by setting up your own IT Shop solution.

### To use the Identity & Access Lifecycle shop

1. In the Designer, set the **QER | ITSHOP** configuration parameter.

In the default installation, the configuration parameter is set and the IT Shop is available. If the configuration parameter is not set, you can set it in the Designer and then compile the database.

If you disable the configuration parameter at a later date, model components and scripts that are not longer required, are disabled. SQL procedures and triggers are still carried out. For more information about the behavior of preprocessor relevant configuration parameters and conditional compiling, see the *One Identity Manager Configuration Guide*.

2. Install and configure the Web Portal.

The products are requested, renewed, and canceled through the Web Portal. Authorized employees have the option to approve requests and cancellations.

For more information, see the One Identity Manager Installation Guide and the One Identity Manager Web Designer Web Portal User Guide.

**IMPORTANT:** This shop's customers are determined by a dynamic role. If a shop contains a large number of customers, the calculations in the IT Shop can cause a heavy load on the DBQueue Processor and therefore on the database server, as well.

Formulate the condition for the dynamic role so that no more than 30,000 employees are found. If necessary, set up your own IT Shop solution with several shops and customer nodes.

### ***To customize the Identity & Access Lifecycle shop***

1. Set up more shelves.  
For more information, see [Managing an IT Shop](#) on page 186.
2. Prepare company resources for requesting.  
For more information, see [Preparing products for requesting](#) on page 21.
3. Assign requestable products to the shelves.  
For more information, see [Assigning and removing products](#) on page 51.
4. Set up the approval process.  
In the default installation, different default approval policies are assigned to the **Identity & Access Lifecycle** shop. Therefore, requests from this shop are run through predefined approval processes.  
You can also assign your own approval policy to the shop. For more information, see [Approval processes for IT Shop requests](#) on page 80.
5. If necessary, edit the dynamic role condition.  
For more information, see [Assigning employees through dynamic roles](#) on page 206.  
For more information about creating the condition, see the *One Identity Manager Identity Management Base Module Administration Guide*.

### ***To set up your own IT Shop solution***

1. In the Designer, set the **QER | ITSHOP** configuration parameter.  
In the default installation, the configuration parameter is set and the IT Shop is available. If the configuration parameter is not set, you can set it in the Designer and then compile the database.  
If you disable the configuration parameter at a later date, model components and scripts that are not longer required, are disabled. SQL procedures and triggers are still carried out. For more information about the behavior of preprocessor relevant configuration parameters and conditional compiling, see the *One Identity Manager Configuration Guide*.
2. Set up shops, shelves, and customer node.  
For more information, see [Managing an IT Shop](#) on page 186.
3. Prepare company resources for requesting.  
For more information, see [Preparing products for requesting](#) on page 21.
4. Assign requestable products to the IT Shop.  
For more information, see [Assigning and removing products](#) on page 51.  
One Identity Manager makes different standard products available, which can be requested through the **Identity & Access Lifecycle** shop. You can also add these standard products to your own IT Shop.

5. Set up the approval process.

For more information, see [Approval processes for IT Shop requests](#) on page 80.

6. Install and configure the Web Portal.

The products are requested, renewed, and canceled through the Web Portal. Authorized employees have the option to approve requests and cancellations.

For more information, see the One Identity Manager Installation Guide and the One Identity Manager Web Designer Web Portal User Guide.

## Related topics

- [Using the IT Shop with the Web Portal for Application Governance](#) on page 16

# Using the IT Shop with the Web Portal for Application Governance

You can use the Web Portal for Application Governance to carry out the onboarding process for new applications quickly and simply. An application brings together all the company resources that the application's users need for their daily work. Once an application is deployed and assigned to a shop in the IT Shop, the assigned company can be requested with the standard Web Portal.

The Web Portal for Application Governance is available if the Application Governance Module is installed.

For more information about using the Web Portal for Application Governance, see the *One Identity Manager Web Portal for Application Governance User Guide*. For more information about configuring the Web Portal for Application Governance, see the *One Identity Manager Web Application Configuration Guide*.

Applications can also be set up in the Manager if the Application Governance Module is available. For more information about this, see the *One Identity Manager Web Application Configuration Guide*.

## Requestable products

Requestable products in the IT Shop are company resources such as target system groups, software, and non-IT resources after they have been assigned to a shelf. The following company resources can be assigned to shelves as requestable products.



**Table 2: Requestable products**

<b>Company resource</b>	<b>Available in module</b>	<b>Documentation guide</b>
Groups and system entitlements of custom target systems	Target System Base Module	One Identity Manager Target System Base Module Administration Guide
Active Directory groups	Active Directory Module	One Identity Manager Administration Guide for Connecting to Active Directory
SharePoint groups and SharePoint roles	SharePoint Module	One Identity Manager Administration Guide for Connecting to SharePoint
HCL Domino groups	Domino Module	One Identity Manager Administration Guide for Connecting to HCL Domino
LDAP groups	LDAP Module	One Identity Manager Administration Guide for Connecting to LDAP
SAP groups, SAP roles, and SAP profiles	SAP R/3 User Management module Module	One Identity Manager Administration Guide for Connecting to SAP R/3
SAP structural profiles	SAP R/3 Structural Profiles Add-on Module	One Identity Manager Administration Guide for SAP R/3 Structural Profiles Add-on
SAP BI analysis authorizations	SAP R/3 Analysis Authorizations Add-on Module	One Identity Manager Administration Guide for SAP R/3 Analysis Authorizations Add-on
E-Business Suite permissions	Oracle E-Business Suite Module	One Identity Manager Administration Guide for Connecting to Oracle E-Business Suite
Azure Active Directory groups	Azure Active Directory Module	One Identity Manager Administration Guide for Connecting to Azure Active Directory
Azure Active Directory administrator roles	Azure Active Directory Module	One Identity Manager Administration Guide for Connecting to Azure Active Directory
Google Workspace groups, Google Workspace products and	Google Workspace Module	One Identity Manager Administration Guide for Connecting to Google Workspace

Company resource	Available in module	Documentation guide
SKUs, Google Workspace Admin role assignments		
Cloud groups and system entitlements	Cloud Systems Management Module	One Identity Manager Administration Guide for Connecting to the Universal Cloud Interface
Resources	Identity Management Base Module	One Identity Manager Identity Management Base Module Administration Guide
Multi-request resources	Identity Management Base Module	One Identity Manager Identity Management Base Module Administration Guide
Account definitions	Target System Base Module	One Identity Manager Target System Base Module Administration Guide
System roles	System Roles Module	One Identity Manager System Roles Administration Guide
Subscribable reports	Report Subscription Module	One Identity Manager Report Subscriptions Administration Guide
Software	Software Management Module	One Identity Manager Software Management Administration Guide
Assignment resources	Identity Management Base Module Business Roles Module	Use assignment resources to request any number of assignments to hierarchical roles or to delegate responsibilities through the IT Shop. For more information, see <a href="#">Assignment requests and delegating</a> on page 57.
Azure Active Directory groups	Azure Active Directory Module	One Identity Manager Administration Guide for Connecting to Azure Active Directory
Azure Active Directory administrator roles	Azure Active Directory Module	One Identity Manager Administration Guide for Connecting to Azure Active Directory
PAM user groups	Privileged Account Governance	One Identity Manager Administration Guide for Privileged Account Governance

Company resource	Available in module	Documentation guide
	Module	
Password requests	Privileged Account Governance Module	One Identity Manager Administration Guide for Privileged Account Governance
Remote desktop session requests	Privileged Account Governance Module	One Identity Manager Administration Guide for Privileged Account Governance
SSH session requests	Privileged Account Governance Module	One Identity Manager Administration Guide for Privileged Account Governance
Telnet session requests	Privileged Account Governance Module	One Identity Manager Administration Guide for Privileged Account Governance
SSH key requests	Privileged Account Governance Module	One Identity Manager Administration Guide for Privileged Account Governance

Software and system roles can also be requested for workdesks. The request's UID\_Workdesk is given as additional information here (PersonWantsOrg.UID\_WorkdeskOrdered).

## Multi-request resources


The IT Shop distinguishes between single or multiple requestable products. Single request products are, for example, software, system roles, or Active Directory groups. These products cannot be requested if they have already been requested for the same time period.

Furthermore, an employee may need several of one type of company resources, for example, consumables. You can find company resources such as these mapped in One Identity Manager as **Multi-request resource** or **Multi requestable/unsubscribable resources**.

**Table 3: Resource types**

Type	Description	Table
Resources	Resources that an employee (workdesk, device) may own just once.  The resources can be requested in the IT Shop just once. The resources are assigned to the employees after approval has been granted. They remain assigned until the request is unsubscribed. You can request them again a later point.  Example: phone, company car.	QERRResource
Multi-request resources	Resources that can be requested more than once in the IT Shop. Requests are automatically canceled once approved. The resources are not explicitly assigned to employees.  Example: resource for requesting remote desktop sessions for assets in a PAM system; consumables, such as pens, printing paper.	QERRReuse
Multi requestable/unsubscribable resources	Resources that an employee can request more than once in the IT Shop but must return them explicitly once they are no longer needed. The resources are assigned to the employees after approval has been granted. They remain assigned until the request is canceled.  Example: printer, monitor.	QERRReuseUS


**To set up multi-request resources and add them as products in the IT Shop**

1. In the Manager, select the **Entitlements > Multi-request resources for IT Shop** category.
2. Click  in the result list.
3. Edit the resource's main data.
4. Save the changes.
5. Select the **Add to IT Shop** task.


In the **Add assignments** pane, assign a shelf.

**TIP:** In the **Remove assignments** pane, you can remove shelf assignments.

**To remove an assignment**

- Select the shelf and double-click .
6. Save the changes.


### ***To set up multi requestable/unsubscribable resources and to add them as products to the IT Shop***

1. Select the **Entitlements > Multi requestable/unsubscribable resources for IT Shop** category.
2. Click  in the result list.
3. Edit the resource's main data.
4. Save the changes.
5. Select the **Add to IT Shop** task.

In the **Add assignments** pane, assign a shelf.

**TIP:** In the **Remove assignments** pane, you can remove shelf assignments.

#### ***To remove an assignment***

- Select the shelf and double-click .
6. Save the changes.

For more information about multi requestable products, see the *One Identity Manager Identity Management Base Module Administration Guide*.

## **Preparing products for requesting**

Company resources have to fulfill at least the following prerequisites before you can request them in the Web Portal:


- The company resource must be labeled with the **IT Shop** option.
- A service item must be assigned to the company resource.
- The company resource must be assigned to a shelf as a product.
- If the company resource is only assigned to employees using IT Shop requests, the company resource must also be labeled with the **Only use in IT Shop** option. This means that the company resource cannot be directly assigned to roles outside the IT Shop.

The **Entitlements** category displays all company resources that can be requested using the IT Shop. This includes software, system entitlements, system roles, account definitions, resources, multi-request resources, and assignment resources if the corresponding modules are installed.

You can prepare the company resources for requesting in the IT Shop if you are an IT Shop administrator and have logged in as role-based. You can assign service items, edit the **IT Shop** and **Only use in IT Shop** options and assign the company resources to IT Shop shelves.

### ***To prepare company resources for requesting***

1. In the Manager, select the **Permissions** category.
2. From the navigation view and results list, select the company resources you want and result list.
3. Select the **Change main data** task.
4. Enable the **IT Shop** option.
5. Assign a new service item in the **Service item** field.

To add a new service item, click . Copy the name of the company resource as identifier for the service item. Enter the other properties on the service item main data form.

6. Save the changes.
7. Select the **Add to IT Shop** task.
8. In the **Add assignments** pane, assign the company resource to shelves.
9. Save the changes.

Customer keep their requested products on the shelf until they unsubscribe them. Sometimes, however, products are only required for a certain length of time and can be canceled automatically after this time. There are other settings required to provide limited period products.

### **Detailed information about this topic**

- [Entering service items](#) on page 22
- [Products for requests with time restrictions](#) on page 46

## **Entering service items**


In order to request company resources in the Web Portal, a service item must be assigned to them. Service items contain additional information about the company resources. For example, you can specify article numbers, request properties, product supervisors, or approvers for requests. A service catalog can be put together from the service items the Web Portal. These contain all the requestable products. You can use service categories, tags, and service item names to find the product in the service catalog.

### ***To create or edit service categories***

1. In the Manager, select the **IT Shop > Service catalog > Hierarchical by service categories > <service category>** category.

- OR -




In the Manager, select the **IT Shop > Service catalog > Hierarchical by service categories > Singles** category.

2. In the result list, select the product's service item and select the **Change main data** task.  
- OR -  
Click  in the result list.
3. Enter the service item's main data.
4. Save the changes.

## General main data of a service item

Enter the following data on the **General** tab. If you add a new service item, you must fill out the required fields.

**Table 4: General main data of a service item**

Main data	Meaning
Service item	Service item name.
Special service item	If a product is used for a specific purpose, for example, for product collection, then mark it as a special service item.
Service category	Group individual products into a collection of products. Select an existing service category from the list or add a new one.  To create a new service category, click  . Enter at least one name for the service item.
Product owners	Assign a <b>Request &amp; Fulfillment   IT Shop   Product owner</b> application role.  Product owners can be used as approvers in a defined approval process within the IT Shop. They can decide on approval of the service item request.  To create a new application role, click  . Enter the application role name and assign a parent application role.  If no product owner is assigned, the product owner of the assigned service category is determined by template.
Attestors	Assign a <b>Request &amp; Fulfillment   IT Shop   Attestor</b> application role.  The members of this application role can be chosen as attestor in an attestation procedure.  To create a new application role, click  . Enter the application role name and assign a parent application role.
Cost center	Cost center for booking the service item in the accounts.

Main data	Meaning
Manufacturer	Manufacturer data.
Terms of use	Terms of use for the product. The product can only be requested if the requester has accepted the terms of use.
Request number, product code, product code (foreign)	Company-specific service item properties.
Functional area	Company-specific service item property.
Approval policies	Approval policy used to determine the approver when the service item is requested in the IT Shop.
Request property	<p>Select a request property using the additional request parameters that are defined for a request.</p> <p>Requests can be given additional information through product-specific request properties such as the specific details of a product, its size, or color. A request property gathers all additional features together that can be given when requesting a product.</p>
Calculation info	Enter the calculation mode as accounting information.
Availability	Company-specific information about the service item's availability.
Sort order	Customer-specific criteria for sorting service items.
Website	<p>Web page with more information about the service item.</p> <p>This field allows you to link product descriptions in the internet or intranet to the service item. To open the website, select <b>Visit website</b> in the default web browser.</p>
Validity period	<p>Time period for limited assignments through IT Shop.</p> <p>The service item is automatically canceled when the time expires. When multi-request resources are requested (QERReuse), this value has no effect.</p> <p>Changing the deadline will not affect requests that have already been approved. The new deadline applies to new requests. It is taken into account when calculating the expiration date of pending request if no deadline was previously set (value change from <b>0</b> to greater than <b>0</b>).</p>
Description	Text field for additional explanation.
Retain service item	Specifies whether requests belonging to this service item remain intact when a customer or a product relocates.



Main data	Meaning
assignment on relocation	
Not available	Specifies whether the service item can still be requested in the IT Shop. If this option is enabled, no new requests can be placed for this item. Existing requests remain intact.
Request properties must be defined separately per recipient	Specifies whether additional request properties must be entered separately for each recipient of this product, if the product is requested for different recipients in one request procedure. If this option is not set, the selected request properties apply uniformly to all recipients of the product.
Approval by multi-factor authentication	The approval of requests with this service item requires multi-factor authentication.

For detailed information about attestation, see the *One Identity Manager Attestation Administration Guide*. For detailed information about cost centers, see the *One Identity Manager Identity Management Base Module Administration Guide*.

## Detailed information about this topic

- [Entering service categories](#) on page 35
- [Selecting responsible approvers](#) on page 99
- [Product owners](#) on page 196
- [Attestors](#) on page 197
- [Business partners](#) on page 192
- [Functional areas](#) on page 194
- [Determining the effective approval policies](#) on page 97
- [Entering product-specific request properties](#) on page 39
- [Products for requests with time restrictions](#) on page 46
- [Product request on customer or product relocation](#) on page 46
- [Moving products to another shelf](#) on page 55
- [Entering terms of use](#) on page 48
- [Preparing the IT Shop for multi-factor authentication](#) on page 56

## Pricing information

Enter the required pricing information for booking the service item to the accounts on the **Calculation** tab.

**Table 5: Pricing for a service item**

Property	Description
Purchase price	Purchase price.
Sales price	Sales price.
Internal price	Internal transfer price.
Rental rate (purchasing)	Purchase price on product rental.
Rental rate (selling)	Sales price on product rental
Rental rate (internal)	Internal transfer price on product rental
Currency	Currency unit
Sales tax	Sale tax to apply in percent (%)

## Extended main data of a service item

On the **Picture** tab, you can import an image of the product into the data base. Select the path where the picture is stored.

On the **User-defined** tab, enter additional company-specific information in the spare fields. Use the Designer to customize display names, formats, and templates for the fields.

## Default service items

One Identity Manager provides service items by default. These service items are assigned to the **Identity & Access Lifecycle** shop. You can request them as standard products through the Web Portal.

### *To edit default service items*

- In the Manager, select the **IT Shop > Service catalog > Predefined** category.

## Additional tasks for managing service items

After you have entered the main data, you can run the following tasks.

## The service item overview

On the overview form, you can see the most important information about a service item.

### *To obtain an overview of a service item*

1. In the Manager, select the **IT Shop > Service catalog > Hierarchical by service categories > <service category>** category.  
- OR -  
In the Manager, select the **IT Shop > Service catalog > Hierarchical by service categories > Singles** category.
2. Select the service item in the result list.
3. Select the **Service item overview** task.

## Editing product dependencies for requests

Dependencies between products are taken into account by Web Portal requests.

### Detailed information about this topic

- [Specifying product dependencies](#) on page 33

## Defining hierarchy for service items

You can structure service items hierarchically. To do this, assign a service item below or above another service item.

### *To structure service items hierarchically*

1. In the Manager, select the **IT Shop > Service catalog > Hierarchical by service categories > <service category>** category.  
- OR -  
In the Manager, select the **IT Shop > Service catalog > Hierarchical by service categories > Singles** category.
2. In the result list, select a service item in the result list and run the task **Edit service item hierarchy**.
3. Select the **Child service items** tab.

In the **Add assignments** pane, assign child service items.

**TIP:** In the **Remove assignments** pane, you can remove service item assignments.

#### **To remove an assignment**

- Select the service item and double-click ✓.
4. Select the **Parent service items** tab.
- In the **Add assignments** pane, assign parent service items.

**TIP:** In the **Remove assignments** pane, you can remove service item assignments.

#### **To remove an assignment**

- Select the service item and double-click ✓.
5. Save the changes.

## Assigning hierarchical roles

You can use One Identity Manager to assess the risk of assignments. The assessments can be evaluated separately by role. Prerequisite is that service items are assigned to the roles. For more information about risk assessment, see the *One Identity Manager Risk Assessment Administration Guide*.

### Assigning organizations

#### **To assign a service item to departments, cost centers, and locations**

1. In the Manager, select the **IT Shop > Service catalog > Hierarchical by service categories > <service category>** category.

- OR -

In the Manager, select the **IT Shop > Service catalog > Hierarchical by service categories > Singles** category.

2. Select the service item in the result list.
3. Select the **Assign organizations** task.

In the **Add assignments** pane, assign the organizations:

- On the **Departments** tab, assign departments.
- On the **Locations** tab, assign locations.
- On the **Cost centers** tab, assign cost centers.

**TIP:** In the **Remove assignments** pane, you can remove assigned organizations.

#### **To remove an assignment**

- Select the organization and double-click ✓.
4. Save the changes.

### Assigning business roles

**NOTE:** This function is only available if the Business Roles Module is installed.

You can issue separate invoices according to the different company structures. Assign service items to business roles to do this.

### ***To assign service items to business roles***

1. In the Manager, select the **IT Shop > Service catalog > Hierarchical by service categories > <service category>** category.

- OR -


In the Manager, select the **IT Shop > Service catalog > Hierarchical by service categories > Singles** category.

2. Select the service item in the result list.
3. Select the **Assign business roles** task.

In the **Add assignments** pane, select the role class and assign business roles.

**TIP:** In the **Remove assignments** pane, you can remove assigned business roles.

#### ***To remove an assignment***

- Select the business role and double-click .
4. Save the changes.

## **Assigning functional areas**

You can use One Identity Manager to assess the risk of assignments. The assessments can be evaluated separately by functional area. To do this, service items must be assigned to functional areas. For detailed information, see the *One Identity Manager Risk Assessment Administration Guide*.

### ***To assign functional areas to a service item***

1. In the Manager, select the **IT Shop > Service catalog > Hierarchical by service categories > <service category>** category.

- OR -


In the Manager, select the **IT Shop > Service catalog > Hierarchical by service categories > Singles** category.

2. Select the service item in the result list.
3. Select the **Assign functional areas** task.

Assign the functional areas in **Add assignments**.

**TIP:** In the **Remove assignments** pane, you can remove functional area assignments.

#### ***To remove an assignment***

- Select the functional area and double-click .
4. Save the changes.

## Related topics

- [Approval by peer group analysis](#) on page 137

## Assigning extended properties

Extended properties are meta objects, such as operating codes, cost codes, or cost accounting areas that cannot be mapped directly in One Identity Manager.

### *To assign extended properties to a service item*

1. In the Manager, select the **IT Shop > Service catalog > Hierarchical by service categories > <service category>** category.

- OR -


In the Manager, select the **IT Shop > Service catalog > Hierarchical by service categories > Singles** category.

2. Select the service item in the result list.
3. Select the **Assign extended properties** task.

In the **Add assignments** pane, assign extended properties.

**TIP:** In the **Remove assignments** pane, you can remove assigned extended properties.

### *To remove an assignment*

- Select the extended property and double-click .
4. Save the changes.

## Displaying websites

You can link product descriptions in internet or intranet with the service item. For this, you enter the URL of a website in **Website** on the main data form.

### *To open the website in a standard browser*

1. In the Manager, select the **IT Shop > Service catalog > Hierarchical by service categories > <service category>** category.

- OR -

In the Manager, select the **IT Shop > Service catalog > Hierarchical by service categories > Singles** category.

2. Select the service item in the result list.
3. Select the **Visit website** task.

## Related topics

- [General main data of a service item](#) on page 23

## Changing products

A product can be replaced by another product at a specified time. All employees who have requested this product are notified by an email telling them to request a replacement product.

### *To replace a product with another one*

1. In the Manager, select the **IT Shop > Service catalog > Hierarchical by service categories > <service category>** category.  
- OR -  
In the Manager, select the **IT Shop > Service catalog > Hierarchical by service categories > Singles** category.
2. Select the product's service item to replace in the result list.
3. Select the **Change product** task.
4. Enter the following data:
  - **Expiry date:** Date on which the product is replaced by a different product.
  - **Alternative product:** Service item that can be requested instead.
5. Click **OK**.

### Related topics

- [Product change notifications](#) on page 177

## Adding and assigning tags

Use this task to assign tags to service items and to add new tags.

### *To add and assign a tag to a service item*

1. In the Manager, select the **IT Shop > Service catalog > Hierarchical by service categories > <service category>** category.  
- OR -  
In the Manager, select the **IT Shop > Service catalog > Hierarchical by service categories > Singles** category.
2. Select the service item in the result list.
3. Select the **Assign tag** task.
4. Select the **Create tag** task.
5. Enter the tag and a description for it.
6. Save the changes.

The new tag is shown on the assignment form.

7. Double-click on the tag to assign it to the selected service item.
8. Save the changes.

### **To assign a tag to a service item**

1. In the Manager, select the **IT Shop > Service catalog > Hierarchical by service categories > <service category>** category.

- OR -


In the Manager, select the **IT Shop > Service catalog > Hierarchical by service categories > Singles** category.

2. Select the service item in the result list.
3. Select the **Assign tag** task.

In the **Add assignments** pane, assign the tag.

**TIP:** In the **Remove assignments** pane, you can remove tag assignments.

#### **To remove an assignment**

- Select the tag and double-click .

4. Save the changes.

**TIP:** You can add more tags. For more information, see [Entering tags](#) on page 50.

## **Assigning object-dependent references**

Object dependent references can be assigned to service items. Use object-dependent references to configure your Web Portal with the Web Designer. All object-dependent references whose type references the AccProduct table can be assigned. For more information about this, see the *One Identity Manager Web Designer Reference Guide*.

### **To assign object-dependent references to a service item**

1. In the Manager, select the **IT Shop > Service catalog > Hierarchical by service categories > <service category>** category.

- OR -


In the Manager, select the **IT Shop > Service catalog > Hierarchical by service categories > Singles** category.

2. Select the service item in the result list.
3. Select the **Assign object-dependent references** task.

In the **Add assignments** pane, assign object-dependent references.

**TIP:** In the **Remove assignments** pane, you can remove object-dependent reference assignments.

#### **To remove an assignment**

- Select the object-dependent reference and double-click .



4. Save the changes.

## Specifying product dependencies

You can define dependencies for products. For example, when a printer is requested, a flat-rate installation charge has to be requested at the same time, and toner may be requested optionally. You can also specify if two products should never be requested simultaneously.

Dependencies between requestable products are created using service items.

When a product is requested, it is tested for dependencies and in this case, dependent products are added to the request.

### *To specify dependencies between products*

1. In the Manager, select the **IT Shop > Service catalog > Hierarchical by service categories > <service category> category**.  
- OR -  
In the Manager, select the **IT Shop > Service catalog > Hierarchical by service categories > Singles** category.
2. Select the product's service item in the result list.
3. Select the **Edit product dependencies for requests** task.
  - In the **Dependent products** tab, specify the dependent products.  
In the **Add assignments** pane, assign the service items.
  - In the **Depends on products** tab, specify which selected service item is dependent on which products.  
In the **Add assignments** pane, assign the service items.
4. Save the changes.
5. Select the **Service item overview** task.
6. Define the properties of the product dependency.
  - a. On the **Dependent products** or **Depends on products** form element, select the dependent product.  
This opens the product dependency details form.
  - b. Specify the dependency conditions. Select one of the following options:
    - Cannot request products together  
This option prevents the dependent product from being acquired by the same request. The product can be assigned at any time with a separate, direct request.
    - Product must be requested at the same time
    - Product can optionally be requested with another
7. Save the changes.

# Reports about service items

One Identity Manager makes various reports available containing information about the selected base object and its relations to other One Identity Manager database objects. The following reports are available for service items.

| **NOTE:** Other sections may be available depending on the which modules are installed.

**Table 6: Reports about service items**

Report	Description
Overview of all assignments	This report finds all roles containing employees with the selected service item.

## Related topics

- [Overview of all assignments](#) on page 34


## Overview of all assignments


The **Overview of all assignments** report is displayed for some objects, such as authorizations, compliance rules, or roles. The report finds all the roles, for example, departments, cost centers, locations, business roles, and IT Shop structures in which there are employees who own the selected base object. In this case, direct as well as indirect base object assignments are included.



### Examples:

- If the report is created for a resource, all roles are determined in which there are employees with this resource.
- If the report is created for a group or another system entitlement, all roles are determined in which there are employees with this group or system entitlement.
- If the report is created for a compliance rule, all roles are determined in which there are employees who violate this compliance rule.
- If the report is created for a department, all roles are determined in which employees of the selected department are also members.
- If the report is created for a business role, all roles are determined in which employees of the selected business role are also members.


### To display detailed information about assignments

- To display the report, select the base object from the navigation or the result list and select the **Overview of all assignments** report.
- Click the  **Used by** button in the report toolbar to select the role class for which you want to determine whether roles exist that contain employees with the selected base object.





All the roles of the selected role class are shown. The color coding of elements identifies the role in which there are employees with the selected base object. The meaning of the report control elements is explained in a separate legend. To access the legend, click the  icon in the report's toolbar.

- Double-click a control to show all child roles belonging to the selected role.
- By clicking the  button in a role's control, you display all employees in the role with the base object.
- Use the small arrow next to  to start a wizard that allows you to bookmark this list of employees for tracking. This creates a new business role to which the employees are assigned.

**Figure 3: Toolbar of the Overview of all assignments report.**



**Table 7: Meaning of icons in the report toolbar**

Icon	Meaning
	Show the legend with the meaning of the report control elements
	Saves the current report view as a graphic.
	Selects the role class used to generate the report.
	Displays all roles or only the affected roles.

## Entering service categories

You can group individual service items into service categories to create a service catalog.

### To edit service categories



1. In the Manager, select the **IT Shop > Basic configuration data > Service categories** category.  
- OR -  
In the Manager, select the **IT Shop > Service catalog** category.
2. In the result list, select the service category and run the **Change main data** task.

3. Edit the service category's main data.
4. Save the changes.

## Service category main data

Enter the following main data of a service category. If you add a new service category, you must fill out the required fields.

**Table 8: General main data of a service category**

Main data	Meaning
Service category	The service item's name.
Special service category	Specifies whether the service category has a special purpose.
Parent service category	If you want to have service categories in a hierarchical structure, select a parent service category from the list.
Product owners	<p>Assign a <b>Request &amp; Fulfillment   IT Shop   Product owner</b> application role.</p> <p>Product owners can be used as approvers in a defined approval process within the IT Shop. They can decide on approval of the service item request.</p> <p>To create a new application role, click . Enter the application role name and assign a parent application role.</p>
Attestors	<p>Assign a <b>Request &amp; Fulfillment   IT Shop   Attestor</b> application role.</p> <p>The members of this application role can be chosen as attestor in an attestation procedure.</p> <p>To create a new application role, click . Enter the application role name and assign a parent application role.</p> <p>For more information, see the <i>One Identity Manager Attestation Administration Guide</i>.</p>
Approval policies	Approval policies used to determine the approver when the service item is requested from a service category in the IT Shop.
Request property	<p>Select a request property using the additional request parameters that are defined for a request.</p> <p>Requests can be given additional information through product-specific request properties such as the specific details of a product, its size, or color. A request property gathers all additional features together that can</p>

Main data	Meaning
	be given when requesting a product.
Purchase price, sales price, internal price, currency	Enter the required price information for the service category accounting.
Sort order	Customer specific criteria for sorting assigned service items.
Description	Text field for additional explanation.
Full name	Full name of the service category.
Remarks	Text field for additional explanation.
Picture	Picture for this service category. Select the path where the picture is stored.
Spare field no. 01 - spare field no. 10	Additional company-specific information. Use the Designer to customize display names, formats, and templates for the input fields.

### Detailed information about this topic

- [Selecting responsible approvers](#) on page 99
- [Product owners](#) on page 196
- [Attestors](#) on page 197
- [Determining the effective approval policies](#) on page 97
- [Entering product-specific request properties](#) on page 39

## Default service categories

One Identity Manager provides service categories by default. These service categories make up the default service items in the service catalog.

### To edit default service categories

- Select the **IT Shop > Basic configuration data > Service categories > Predefined** category.

## Additional tasks for managing service categories

After you have entered the main data, you can run the following tasks.

## The service category overview

The overview form, shows you the most important information about a service category, at a glance.

### *To obtain an overview of a service category*

1. In the Manager, select the **IT Shop > Basic configuration data > Service categories** category.  
- OR -  
In the Manager, select the **IT Shop > Service catalog** category.
2. Select the service category in the result list.
3. Select the **Service category overview** task.

## Assigning service items

Use this task to assign any number of service items to a service category.


### *To assign service items to a service category*

1. In the Manager, select the **IT Shop > Basic configuration data > Service categories** category.  
- OR -  
In the Manager, select the **IT Shop > Service catalog** category.
2. Select the service category in the result list.
3. Select the **Assign service items** task.

In the **Add assignments** pane, assign service items.

**TIP:** In the **Remove assignments** pane, you can remove service item assignments.

#### *To remove an assignment*

- Select the service item and double-click .
4. Save the changes.

## Assigning object-dependent references

Object-dependent references can be assigned to service categories. Use object-dependent references to configure your Web Portal with the Web Designer. All object-dependent references whose type references the AccProductGroup table can be assigned. For more information about this, see the *One Identity Manager Web Designer Reference Guide*.

### ***To assign object-dependent references to a service category***

1. In the Manager, select the **IT Shop > Basic configuration data > Service categories** category.

- OR -


In the Manager, select the **IT Shop > Service catalog** category.

2. Select the service category in the result list.
3. Select the **Assign object-dependent references** task.

In the **Add assignments** pane, assign object-dependent references.

**TIP:** In the **Remove assignments** pane, you can remove object-dependent reference assignments.

#### ***To remove an assignment***

- Select the object-dependent reference and double-click .
4. Save the changes.

## **Entering product-specific request properties**

Requests can be given additional information through product-specific request properties such as the specific details of a product, its size, or color. A request property gathers all additional features together that can be given when requesting a product.


Define a request parameter for each feature of a request property. Parameters can be marked as mandatory if a value must be entered when they are requested.

To be able to use request properties, you assign them to service items or service categories. When a product is requested, the parameters of this request property are displayed. If a service item does not have a request property assigned to it, the service category's request property is used.

**NOTE:** The definition of request properties was redesigned with One Identity Manager version 8.2. Now you can define a lot of additional information for request parameters. This makes the implementation of request properties more flexible. The previous solution can still be used. When you add a new request property, you specify whether you want to use the obsolete or the new style definition.

### **Adding request properties with the new style definition**

#### ***To add a request property***


1. In the Manager, select the **IT Shop > Basic configuration data > Request properties** category.
2. Click  in the result list.
3. Enter the name and a description for the request property.

Leave the **Obsolete definition** option disabled. After saving, the option cannot be changed again.

4. Save the request property.
5. Select the **Parameter** tab.
6. Click **Add**.
7. Edit the request parameter's main data.
8. To add another request parameter, click **Add**.
9. Save the changes.

## Adding request properties with the obsolete definition

### *To add a request property*

1. In the Manager, select the **IT Shop > Basic configuration data > Request properties** category.
2. Click  in the result list.
3. Enter the name and a description for the request property.
4. Enable the **Obsolete definition** option.  
After saving, the option cannot be changed again.
5. Save the request property.
6. Select the **Parameter** tab.
7. Click **Add**.
8. Edit the request parameter's main data.
9. To add another request parameter, click **Add**.
10. Save the changes.

## Editing request properties

### *To edit a request property*

1. Select the **IT Shop > Basic configuration data > Request properties** category.
2. Select the request property in the result list.
3. Select the **Change main data** task.
4. Edit the request property's main data.
5. Save the changes.

## Detailed information about this topic

- [Request property and request parameter settings](#) on page 41
- [Copy request properties](#) on page 45



## Related topics

- [Service category main data](#) on page 36
- [General main data of a service item](#) on page 23

# Request property and request parameter settings

Enter the following main data for a request property.

**Table 9: Request property main data**

Property	Description
Request property	Name of the request property.
Description	Exact description of the request properties.
Obsolete definition	Specifies whether an obsolete definition is used for the request parameter. This information cannot be changed after a new request property has been saved.

## Settings for request parameters with the current definition

Request parameters with the current definition are saved in the DialogParameter table. All a request property's parameters are grouped together internally as a parameter set (DialogParameterSet). The parameter settings defined in the Manager are saved as default parameters. During the request, fixed parameter values can be entered in the Web Portal. These values are saved per request in parameter subsets. If the request has not entered a value, the parameter value from the default parameter set is used.

**IMPORTANT:** If the parameter settings in the default parameter set are changed and, as long as the requester has not entered their own values, the changes are passed on to all the requests in the shopping cart that use this parameter set.



**NOTE:** The **Inherited** value can be selected for various parameter settings. This does not affect request parameters. The parameter settings' default values apply that are shown next to the input fields.

There are three tabs for editing the parameter settings, the value definition, and scripts for calculating the values. The actual parameter values are shown next to the fields and menus.

## General tab

**Table 10: General parameter settings**


Property	Description
Parameter name	Parameter name.

Property	Description
Parameter type	<p>Type of parameter. Permitted values are:</p> <ul style="list-style-type: none"> <li>• <b>Fixed:</b> Fixed parameter values are used. On the <b>Value definition</b> tab, enter the parameter value.</li> <li>• <b>User prompt:</b> The user must select a parameter value in the user prompt during the request.</li> <li>• <b>Calculation:</b> The parameter value is calculated during the request. On the <b>Value calculation</b> tab, enter the table column and the condition for calculating the value.</li> </ul> <p>Other settings are shown or hidden depending on the type.</p>
Display name	User friendly name for the parameter. To display language dependent display names, translate the given text with the  button.
Description	Text field for additional explanation. Translate the given text with the  button.
Sort order	Position of the parameter in the request property view in the Web Portal.
Mandatory parameter	Specifies whether this is a mandatory parameter. This parameter must have a value in it in order to make the request.
Viewable	Specifies whether the parameter is shown in the request in the Web Portal.
Can be overwritten	Specifies whether the parameter value can be overwritten during the request.

## Value definition tab

**Table 11: Value definition**

Property	Description
Data type	Parameter data type.
Date add-on	Additional information about calculating date and time data for displaying in the user interface. The value can be edited if the <b>Date</b> data type is selected.
Value range	Specifies whether the report parameter value has to be within a given range. If <b>Yes</b> , additional fields appear.
Multivalue	Specifies whether the parameter accepts multiple values. If <b>Yes</b> , users can select multiple value from a list.
Multiline	Specifies whether the parameter contents can have multiple lines. If <b>Yes</b> , line breaks are permitted.
Data source	<p>Type of data source. Permitted values are:</p> <ul style="list-style-type: none"> <li>• <b>None:</b> The user can give any value.</li> <li>• <b>Table:</b> The user selects a value from a specified table column.</li> </ul>

Property	Description
	<ul style="list-style-type: none"> <li>• <b>List of permitted values:</b> The user selects a value from a predefined list.</li> </ul> <p>You may require additional data depending on the data source.</p>
Table column (query)	<p>Additional data for the data source <b>Table</b>.</p> <p>Table column for selecting the parameter value. The user can select a value from this table column. If the parameter is multi-value, you can select several values from this column as well.</p>
Display pattern	<p>Additional data for the data source <b>Table</b>.</p> <p>Display pattern for table elements in lists in %column% notation. The ?? operator is permitted. This means, when one column's value is empty, another column's value is displayed.</p> <p>Example: %column1??column2??column3%</p>
Condition (query)	<p>Additional data for the data source <b>Table</b>.</p> <p>Limiting condition (Where clause) for selecting the parameter value using a table column. The user can select a value from the result set. If the parameter is multi-value, you can select several values from this result set as well.</p> <p>You can reference other parameters in the condition using the following syntax:</p> <p>\$PC(&lt;Parametername&gt;)\$</p>
List of permitted values	<p>Additional data for the data source <b>List of permitted values</b>.</p> <p>List of values permitted in this parameter in the <b>value=display name</b> notation. If an = is no given, the entry counts as both value and display name.</p> <p>Example: 1=internal 2=external</p> <p>To display language dependent display names, translate each display name using the  button.</p>
Overwrite empty value	<p>Specifies whether an empty parameter value overwrites the default value.</p> <p>If this option is disabled, the default value is overwritten if a parameter value is not given.</p>
Parameter value	<p>Parameter value If a value range is given, the <b>Parameter value (from)</b> and the <b>Parameter value (to)</b> are displayed.</p>
Example value	<p>Example of the parameter.</p> <p>If a value range is given, the <b>Example value (from)</b> and the <b>Example value (to)</b> are displayed.</p>
Default value	<p>Default value of the parameter. This is used if the user does not specify a parameter value and the <b>Overwrite empty value</b> option is not set.</p>

Property	Description
	If a value range is given, the <b>Default value (from)</b> and the <b>Default value (to)</b> are displayed.

## Value calculation tab

**Table 12: Scripts for calculating values**

Property	Description
Table column (calc.)	Additional input for <b>Calculated</b> parameter type. Table column for selecting the parameter value. The parameter value is calculated during the request.
Condition (calc.)	Additional input for <b>Calculated</b> parameter type. Limiting condition (where clause) for selecting the value through a table column. The parameter value is calculated during the request. If the parameter is multivalue as well, several values may be found.  If a condition is not given and the parameter is not multivalue, the first value is used that is determined by the table column. If the parameter is multivalue and a condition is not given, all determined values are used.
Valuation script	Script in VB.Net syntax for modifying the parameter value. The script can be used as a formatting script and the existing parameter value modified or reset the parameter value.
Validation script	Script in VB.Net syntax for checking permitted values of parameters. Create a script that checks the user input.

## Request parameter main data for obsolete definition

Request parameters with an obsolete definition are saved in the AccProductParameter table. In a request parameter's main data, you specify the column in the ShoppingCartItem table where request parameter is saved during the request. If the selected column is a foreign key column, the requester can select from list of permitted values from in the Web Portal. The values can be limited by a condition. If the selected column allows free text, the requester must enter the request property as text in the Web Portal.

**NOTE:** If you want to use custom column to store request properties, add identical columns to the tables ShoppingCartItem and PersonWantsOrg.

**Table 13: Request property main data**

Property	Description
Column	Column of the ShoppingCartItem table where the parameter value is saved during the request.
Display value	User friendly name for the parameter. To display language dependent display values, translate the given text with the  button.

Property	Description
Sort order	Sort order in which to display the request properties in the Web Portal.
Mandatory parameter	Specifies whether this is a mandatory parameter. This parameter must have a value in it in order to make the request.
Read-only	Specifies whether the parameter should only be viewable in the Web Portal and not editable.
Editable for approver	<p>Specifies whether the parameter can also be edited by approvers.</p> <p>If this option is set, the parameter value that was entered by the requester can be changed by the approver.</p> <p>If this option is not set, only the requester can enter a value.</p>
Condition	Condition limiting a foreign key value list.

## Related topics

- [Entering product-specific request properties](#) on page 39

## Copy request properties

To reuse existing definitions of request parameters, you can copy the request properties.

### *To copy a request property*

1. Select the **IT Shop > Basic configuration data > Request properties** category.
2. Select the request property in the result list.
3. Select the **Create copy** task.
4. Enter a name for the new request property and click **OK**.

This creates a request property with the given name. You can now edit the request properties of this request property.

## Related topics

- [Request property and request parameter settings](#) on page 41
- [Entering product-specific request properties](#) on page 39

## Request properties overview

On the overview form, you see, at a glance, the most important information about a request property.

### ***To obtain an overview of a request property***

1. Select the **IT Shop > Basic configuration data > Request properties** category.
2. Select the request property in the result list.
3. Select the **Request properties overview** task.

### **Related topics**

- [Request property and request parameter settings](#) on page 41

## **Products for requests with time restrictions**

Customers retain their requested products until they cancel them themselves. Sometimes, however, products are only required for a certain length of time and can be canceled automatically after this time. Products that are intended to have a limited shelf life need to be marked with a validity period.

To enter a validity period for products

### ***To specify a validity period for a product request***

1. In the Manager, select the **IT Shop > Service catalog > Hierarchical by service categories > <service category>** category.  
- OR -  
In the Manager, select the **IT Shop > Service catalog > Hierarchical by service categories > Singles** category.
2. Select the service item in the result list.
3. Select the **Change main data** task.
4. Enter in the **Validity period (max. # days)** field the time period within which the product can be requested.  

**INFORMATION:** This value has no effect on requests for multi-request resources (QERReuse).
5. Save the changes.

One Identity Manager calculates the date that the product is automatically canceled from the current data and validity period at the time of request and approval.

## **Product request on customer or product relocation**

If a customer requests a product from a shop or shopping center and then changes to another at a later date, you must decide how the existing request should be handled. The

same applies if a product is moved to another shelf. One Identity Manager checks whether the request recipient and the product belong to the same shop after relocating.

**Table 14: Effects of relocating**

Request recipient and product	Effect on closed requests	Effect on pending requests
In different shops	The request is canceled. The assignment is removed.	The request is canceled.
In the same shop	Behavior is defined by <b>Retain service item assignment on relocation</b> in the service item.	

**Table 15: Effect of the "retain service item assignment on relocation" option**

Option Value	Effect on approved requests	Effect on pending requests
Not set	The request is canceled. The assignment is removed.	The request is canceled.
Enabled	The request remains intact. Shelf and shop are updated in the request procedure. Assignment of requested company resources remains intact.	The request remains intact. Shelf and shop are updated in the request procedure. Approvals already granted, are reset. The request runs through the approval process implemented in the new shop.

**NOTE:** The request is realized in the shop in which the request recipient is customer and that contains the requested product. If several shelves or shops are found to which the condition applies, One Identity Manager selects one of the shelves or shop, respectively, to relocate.

The complete approval sequence is shown in the approval history.

### **To obtain a product's requests on relocation**

1. In the Manager, select the **IT Shop > Service catalog > Hierarchical by service categories > <service category>** category.  
- OR -  
In the Manager, select the **IT Shop > Service catalog > Hierarchical by service categories > Singles** category.
2. Select the service item in the result list.
3. Select the **Change main data** task.
4. Set the **Retain service item assignment on relocation** option.
5. Save the changes.

# Non-requestable products

Products that have already been requested but can only be requested for a limited period, can be specially labeled for it. Existing request for the product remain intact. However, no new requests may be made for the product.


## *To label a product as not requestable*

1. In the Manager, select the **IT Shop > Service catalog > Hierarchical by service categories > <service category> category**.
2. Select the product's service item in the result list.
3. Select the **Change main data** task.
4. Set **Not available**.
5. Save the changes.

# Entering terms of use

Terms of use that explain conditions of use for a product can be stored for individual service items (for example, software license conditions). When someone requests this product, the requester, and request recipient must accept the terms of use before the request can be finalized.

## *To add or edit terms of use*

1. In the Manager, select the **IT Shop > Service catalog > Terms of use** category.
2. In the result list, select a terms of use and run the **Change main data** task.  
- OR -  
Click  in the result list.
3. Edit the terms of use main data.
4. Save the changes.

Enter the following properties for the terms of use.

**Table 16: General main data of terms of use**

Property	Meaning
Terms of use	Name of the terms of use.
Description	Text field for additional explanation.
Contents	Full text of the terms of use.

In order for the request recipient to accept the terms of use, the request must be assigned to the request recipient in the approval process. Set an approval workflow for such



requests that contain a BR approval step and enable the **No automatic approval** option for this approval step. One Identity Manager provides a default approval procedure and a **Terms of Use acknowledgment for third-party orders (sample)** default approval policy that you can use for this.

## Related topics

- [Approving requests with terms of use](#) on page 149

## Additional tasks for terms of use

After you have entered the main data, you can run the following tasks.

### The terms of use overview

You can see the most important information about a tag on the overview form.

#### *To obtain an overview of the terms of use*

1. In the Manager, select the **IT Shop > Service catalog > Terms of use** category.
2. Select the terms of use in the result list.
3. Select the **Terms of use overview** task.

### Assigning service items

Specify the products to which the terms of use apply. Assign service items to the terms of use to do this.


#### *To assign service items to the terms of use*

1. In the Manager, select the **IT Shop > Service catalog > Terms of use** category.
2. Select the terms of use in the result list.
3. Select the **Assign service items** task.

In the **Add assignments** pane, assign service items.

**TIP:** In the **Remove assignments** pane, you can remove service item assignments.


#### *To remove an assignment*

- Select the service item and double-click .
4. Save the changes.

# Entering tags

Product owners are able to add tags to their products. These tags can be used as search criteria by requests in the Web Portal. There are two ways of adding tags.

## ***To add or edit a tag***

1. In the Manager, select the **IT Shop > Basic configuration data > Tags** category.
2. In the result list, select a tag and run the **Change main data** task.  
- OR -  
Click  in the result list.
3. Edit the tag data.
4. Save the changes.

Enter the following data for a tag.

**Table 17: General main data of a tag**

Property	Meaning
Tag	Tag.
Description	Tag description.
Comment	Text field for additional explanation.
Parent tag	Tags can be organized hierarchically. Assign a parent tag to do this.

## ***To add a tag directly to a product***

1. In the Manager, select the **IT Shop > Service catalog > Hierarchical by service categories > <service category>** category.  
- OR -  
In the Manager, select the **IT Shop > Service catalog > Hierarchical by service categories > Singles** category.
2. Select the service item in the result list.
3. Select the **Assign tag** task.
4. Select the **Create tag** task.
5. Enter the tag and a description for it.
6. Click **Ok** to save the tag.  
The new tag is shown on the assignment form.
7. Double-click on the tag to assign it to the selected service item.
8. Save the changes.

## Additional tasks for tags

After you have entered the main data, you can run the following tasks.

### The tags overview

The overview form contains the most important information about a tag.

#### *To get an overview of a tag*

1. In the Manager, select the **IT Shop > Basic configuration data > Tags** category.
2. Select a tag in the result list.
3. Select the **Tag overview** task.

### Assigning service items

Assign service items to the tags so that you can use the tags as search terms in the Web Portal. The Web Portal finds all the requestable service items assigned to a tag.


#### *To assign a tag to a service item*

1. In the Manager, select the **IT Shop > Basic configuration data > Tags** category.
2. Select a tag in the result list.
3. Select the **Assign service items** task.

In the **Add assignments** pane, assign service items.

**TIP:** In the **Remove assignments** pane, you can remove service item assignments.

#### *To remove an assignment*

- Select the service item and double-click .
4. Save the changes.

## Assigning and removing products

Once you have prepared the product to be requested, assign it to a shelf or a shelf template. A shelf has several tasks available for assigning and removing products.

**NOTE:** The tasks are only displayed if the **Assignments permitted** and **Direct assignment permitted** options are enabled for the **IT Shop structure** or **IT Shop template** role classes.

**Table 18: Tasks for assigning and removing requestable products**

<b>Products</b>	<b>Task</b>
Software	Assign software
Resources	Assign resource
Multi-request resources	Assign resource
Multi requestable/unsubscribable resources	Assign resource
System roles	Assign system roles
Groups and system entitlements from custom target systems	Assign system entitlements of custom target systems
Active Directory groups	Active Directory Assign groups
Azure Active Directory permissions	Azure Active Directory Assign groups Azure Active Directory Assign administrator roles Azure Active Directory assign subscriptions Assigning disabled Azure Active Directory service plans
SharePoint permissions	SharePoint Assign groups Assign SharePoint roles
LDAP groups	LDAP Assign groups
HCL Domino groups	Notes Assign groups
SAP R/3 permissions	Assign BI analysis authorizations SAP Assign groups Assign SAP profiles Assign SAP roles Assigning structural profiles
E-Business Suite permissions	Assign E-Business Suite authorizations
Exchange Online permissions	Assign Exchange Online mail-enabled distribution groups Office 365 Assign groups
Privileged Account Management permissions	Assign PAM user groups
SharePoint Online permissions	SharePoint Online Assign groups Assign SharePoint Online roles

Products	Task
Google Workspace permissions	Google Workspace Assign groups Google Workspace Assign products and SKUs
Unix groups	Unix Assign groups
Cloud groups and system entitlements	Assign cloud groups and system entitlements
Subscribable reports	Assign subscribable reports
Assignment resources	Assign resource
Account definitions	assign account definition

### Detailed information about this topic

- [Role classes for the IT Shop](#) on page 191

## Assigning products to shelves

There are different tasks available for assigning a single product from a shelf. The following example based on a resource shows you how to assign individual products.

### *To assign a resource to the Identity Lifecycle shelf as a product*

1. In the Manager, select the **IT Shop > IT Shop > Identity & Access Lifecycle > Shelf: Identity Lifecycle** category.
2. Select the **Assign resources** task.
3. In the **Add assignments** pane, assign resources.
4. Save the changes.

Products are automatically assigned to shelves at the same time, if:

- Groups are automatically added to the IT Shop
- Rule templates are used to set up the IT Shop

Use the DBQueue Processor inheritance mechanism and subsequent post-processing to create a separate product node for each assigned product within the shelf. These product nodes are displayed with the name of the product's service item. If products are added in bulk to the IT Shop by automatic processes, you can specify how many product nodes are created in one DBQueue Processor run in the **QER | ITShop | LimitOfNodeCheck** configuration parameter. Once this number has been exceeded, the task is closed and queued again in the DBQueue for generating the rest of the product nodes. By default, 500 objects are processed in one run.

## Related topics

- [Adding Active Directory and SharePoint groups to the IT Shop automatically](#) on page 75
- [Templates for automatically filling the IT Shop](#) on page 210

# Removing products from shelves

There are different tasks available for removing a product from a shelf. In the following section, we take the example of a resource to show how to remove a product.

### *To remove a resource from the Identity Lifecycle shelf*

1. In the Manager, select the **IT Shop > IT Shop > Identity & Access Lifecycle > Shelf: Identity Lifecycle** category.
2. Select the **Assign resources** task.
3. Remove the resource from **Remove assignments**.
4. Save the changes.

When you remove a product from a shelf, pending requests for the product are closed and approved requests are unsubscribed.

### *To remove a product from all shelves*

- Select the **Remove from all shelves** task.  
You will find the task on the main data form of the respective product, for example, a resource.

The task immediately removes product assignments to manually configured shelves and shelf templates. Then, the DBQueue Processor removes product assignments to shelves, based on a template definition. All assignments are unsubscribed if the product is part of an assignment request.

## Information on bulk processing

If products are added in bulk to the IT Shop by automatic processes, you can specify how many product nodes are created in one DBQueue Processor run in the **QER | ITShop | LimitOfNodeCheck** configuration parameter. Once this number has been exceeded, the task is closed and queued again in the DBQueue for generating the rest of the product nodes. By default, 500 objects are processed in one run. The number of requests submitted in bulk can be considerably larger than other processes.

Set a lower value if performance issues arise when running the QER-K-OrgAutoChild process task.

# Moving products to another shelf

A product can be moved to another shelf. If the shelf is in another shop, the system checks whether the request recipient is also a customer in the new shop.

## *To move a product to another shelf*

| **NOTE:** Standard products cannot be moved.

1. In the Manager, select the **IT Shop > IT Shop > <shop> > Shelf: <shelf>** category.
2. Select an object in the result list.
3. Select the **Move to another shelf** task.
4. Select the new shelf.
5. Click **OK**.

## Detailed information about this topic

- [Product request on customer or product relocation](#) on page 46

# Replacing products

A product can be replaced by another product at a specified time. All employees who have requested this product are notified by an email telling them to request a replacement product.

## *To replace a product with another one*

1. In the Manager, select the **IT Shop > Service catalog > Hierarchical by service categories > <service category>** category.  
- OR -  
In the Manager, select the **IT Shop > Service catalog > Hierarchical by service categories > Singles** category.
2. Select the product's service item to replace in the result list.
3. Select the **Change product** task.
4. Enter the following data:
  - **Expiry date:** Date on which the product is replaced by a different product.
  - **Alternative product:** Service item that can be requested instead.
5. Click **OK**.

## Related topics

- [Product change notifications](#) on page 177

# Preparing the IT Shop for multi-factor authentication

You can use multi-factor authentication for specific security-critical resource requests, which requires every requester or approver to enter a security code for the request or request approval. Define which products require this authentication in your service items.

Use One Identity Manager One Identity Starling Two-Factor Authentication for multi-factor authentication. The authentication information required is defined in the subparameters under the **QER | Person | Starling** or the **QER | Person | Defender** configuration parameter. For detailed information about setting up multi-factor authentication, see the *One Identity Manager Authorization and Authentication Guide*.

## To use multi-factor authentication in the IT Shop

1. Set up multi-factor authentication as described in the *One Identity Manager Authorization and Authentication Guide*.
2. In the Manager, create service items for the product that can only be requested with multi-factor authentication.
  - Enable the **Approval by multi-factor authentication** option.

**TIP:** If the requester is also going to use multi-factor authentication, assign terms of use to the service item. For more information, see [Using multi-factor authentication for requests](#) on page 56.

**IMPORTANT:** An approval cannot be sent by email if multi-factor authentication is configured for the requested product. Approval mails for such requests produce an error message.

For more information about requesting products requiring multi-factor authentication and about canceling products, see the *One Identity Manager Web Designer Web Portal User Guide*.

## Related topics

- [General main data of a service item](#) on page 23
- [Approval by mail](#) on page 178
- [Allowing approval decisions using the Starling 2FA app](#) on page 182

# Using multi-factor authentication for requests

Multi-factor authentication can be implemented for requests as well as for request approvals.



Once the **Approval by multi-factor authentication** option is enabled for a service item, a security code is requested in every decision step of the approval process. This means that every approver who makes approval decisions about this product must have a Starling 2FA token.

To enable the requester to use multi-factor authentication, you can assign terms of use to the service item, as well. The requester must enter the security code when they confirm the terms of use. The request recipient must also enter a security code if the approval workflow is accordingly configured. For more information, see [Approving requests with terms of use](#) on page 149.

**Table 19: Variations of multi-factor authentication for making requests in the IT Shop**

Active approval policy	Terms of use	Security code is requested from	
		Requester	Approver
Self-service	None		
Self-service	Assigned	x	
No self-service	None		x
No self-service	Assigned	x	x

### Related topics

- [Entering terms of use](#) on page 48

## Assignment requests and delegating

You can also use One Identity Manager to request hierarchical roles, like departments, or business roles, through the IT Shop and assign them to employees, devices, and workdesks. This allows any number of assignments to be made through IT Shop requests. The advantage of this method is that any assignments can be authorized using an approval process. Assignment renewals and assignment recall are also subject to an approval process in the same way. The request history makes it possible to follow which assignments were requested, renewed, or canceled, why, when, and by whom.

Managers of hierarchical roles can make assignment requests for their roles.

Delegation is a special type of assignment request. This allows an employee to pass on a role assignment to another person for a limited period of time. Delegations are also subject to a fixed approval process.

Hierarchical role managers can view the role assignment requests they manage in the Web Portal. Use the **QER | ITShop | ShowClosedAssignmentOrders** configuration parameter to specify whether all assignment requests are displayed or only open ones. By default, pending as well as closed assignment requests are displayed.

### *To only display a manager's pending assignment requests in the Web Portal*

- Disable the **QER | ITShop| ShowClosedAssignmentOrders** configuration parameter in the Designer.

## Standard products for assignment requests and delegation

You require special resources for assignment requests and delegation, also called assignment resources. Assignment resources are linked to service items and can thus be made available as products in the IT Shop.

One Identity Manager provides standard products for assignment requests and delegation. These are used to:

- Request membership in business roles or organizations for which the logged-in One Identity Manager user is responsible.
- Order assignments of system entitlements or other company resources to business roles or organizations for which the logged in One Identity Manager user is responsible.
- Delegate responsibilities or memberships in hierarchical roles.

**Table 20: Standard products for assignment requests and delegation**

Assignment resource	Service item	Shop   Shelf	Request
Members in roles	Members in roles	Identity & Access Lifecycle   Identity Lifecycle	Memberships in business roles, application roles and organizations
Role entitlement assignments	Role entitlement assignments		Assignment of company resources to business roles and organizations
Delegation	Delegation		Delegations

In the default installation, all active One Identity Manager database employees are customers of the **Identity & Access Lifecycle** shop. This allows all active employees to request memberships and assignments or delegate roles. Assignment requests with standard products are automatically approved through self-service and delegation.

You can add standard products for assignment requests and delegations to your own IT Shop.

Assignments can only be requested from and for customers of this shop. This means, the manager of the hierarchical roles as well as the employees that are also members of these roles, must be customers in the shop. The same applies to delegation.

**TIP:** Assignment requests can also be made for custom assignment tables (many-to-many tables), if they have an `Xorigin` column. The properties for this column must correspond to the column definition for `Xorigin` columns in the One Identity Manager data model.

### Example for an assignment request

Clara Harris is the project X project leader. A business role (Project X) is added in the Manager to ensure that all the project staff obtain the necessary entitlements. Clara Harris is assigned as manager of this business role. All project staff have a user account in the Active Directory domain P.

Clara Harris can request memberships in the Project X business role in the Web Portal because she is a manager. Clara Harris requests memberships for herself and all project staff.

Furthermore, Clara Harris wants all project staff to obtain their entitlements in Active Directory through the Project X AD permissions Active Directory group. To this, she requests Project X AD permissions in the Web Portal for the Project X business role.

The user accounts of all project staff become members in the Project X AD permissions Active Directory group through internal inheritance processes.

For more information, see the *One Identity Manager Web Designer Web Portal User Guide*.

### Detailed information about this topic

- [Preparing for delegation](#) on page 63

### Related topics

- [Examples of request results](#) on page 247

## Requesting memberships in business roles

Installed modules: Business Roles Module

You have the option to limit assignment requests to single business roles. To do this, an assignment resource is created for a fixed requestable business role. The business role is automatically part of the request in an assignment resource request. If the request has been approved, the requester becomes a member of the application role.

Each requestable business role of this kind can have its own approval process defined. The service items connected with the assignment resources are assigned separate approval policies in order to do this.

### ***To limit assignment requests to single business roles***

1. In the Manager, select the **Business roles > <role class>** category.
2. Select the business role in the result list.
3. Select the **Create assignment resource** task.

This starts a wizard that takes you through the steps for adding an assignment resource.

- a. Enter a description and allocate a resource type.

This creates a new assignment resource with the following custom properties:

- **Table:** Org
- **Object:** Full name of business role

- b. Enter the service item properties to allocate to the assignment resource.

- Assign a service category so that the assignment resource in the Web Portal can be ordered using the service category.

A new service item is created and linked to the assignment resource.

4. Assign the assignment resource to an IT Shop shelf as a product.
5. Assign an approval policy to the shelf or the assignment resource's service item.

Assignment resource and service item main data can be processed later on if required.

The assignment resource can be requested in the Web Portal like any other company resource. After the request has been successfully assigned, the employee for whom it was requested becomes a member of the associated business role through internal inheritance processes. For more information about requesting assignment resources, see the *One Identity Manager Web Designer Web Portal User Guide*.

The assignment resource cannot be used to request the assignment of company resources to this business role. Instead, use the **Role entitlement assignment** default assignment resource.

### **Related topics**

- [Adding assignment resources to the IT Shop](#) on page 68
- [General main data of a service item](#) on page 23
- [Assigning requestable products to shelves](#) on page 203
- [Setting up assignment resources](#) on page 66
- [Entering service items](#) on page 22

## **Requesting memberships in application roles**

You have the option to limit assignment requests to single business roles. To do this, an assignment resource is created for a fixed requestable application role. The application

role then automatically becomes part of the assignment resource request. If the request is approved, the requester becomes a member of the application role.

Each requestable application role of this kind can have its own approval process defined. The service items connected with the assignment resources are assigned separate approval policies in order to do this.

### ***To limit assignment requests to single application roles***

1. In the Manager, select an application role in the **One Identity Manager Administration** category.
2. Select the **Create assignment resource** task.

This starts a wizard that takes you through the steps for adding an assignment resource.

- a. Enter a description and allocate a resource type.

This creates a new assignment resource with the following custom properties:

- **Table:** AERole
- **Object:** Full name of application role

- b. Enter the service item properties to allocate to the assignment resource.

- Assign a service category so that the assignment resource in the Web Portal can be ordered using the service category.

A new service item is created and linked to the assignment resource.

3. Assign the assignment resource to an IT Shop shelf as a product.
4. Assign an approval policy to the shelf or the assignment resource's service item.

Assignment resource and service item main data can be processed later on if required.

The assignment resource can be requested in the Web Portal like any other company resource. After the request has been successfully assigned, the employee for whom it was requested becomes a member of the associated application role through internal inheritance processes. For more information about requesting assignment resources, see the *One Identity Manager Web Designer Web Portal User Guide*.

### **Related topics**

- [Adding assignment resources to the IT Shop](#) on page 68
- [General main data of a service item](#) on page 23
- [Assigning requestable products to shelves](#) on page 203
- [Setting up assignment resources](#) on page 66
- [Entering service items](#) on page 22

# Customizing assignment requests

Assignment requests with standard products are automatically approved through self-service. If assignment requests are going to be approved by an approval supervisor, assign a suitable approval policy to the default assignment resource. This means that assignment requests also go through the defined approval process.


## **To approve assignment requests through an approver**

- Assign separate approval policies to the default assignment resources service items.  
- OR -
- Assign any approval policy to the **Identity Lifecycle** shelf.

Sometimes assignment requests should be subject to various approval processes depending on the object requested. For example, a department manager should approve department assignment, but department membership should be approved by the employee's manager. You can define assignment resources to do this. You can assign these assignment resources to any shelf in your IT Shop.

**NOTE:** To use these assignment resources, you must make more modifications to the Web Designer configuration.

## **To configure custom assignment requests**

1. Create a new assignment resource.
  - a. In the Manager, select the **Entitlements | Assignment resource for IT Shop** category.
  - b. Click  in the result list.
  - c. Select the **Change main data** task.
  - d. Enter the assignment resource name.
  - e. Assign a new service item.
  - f. Save the changes.
2. Assign the assignment resource to an IT Shop shelf as a product.
  - a. Select the **Add to IT Shop** task.
  - b. In the **Add assignments** pane, assign a shelf.
  - c. Save the changes.
3. Assign an approval policy to the shelf or the assignment resource's service item.
4. In the Web Designer, configure usage of the assignment resource.

For more information, see the *One Identity Manager Web Designer Reference Guide*.

## **Detailed information about this topic**

- [General main data of an assignment resource](#) on page 66
- [Adding assignment resources to the IT Shop](#) on page 68

- [General main data of a service item](#) on page 23
- [Assigning requestable products to shelves](#) on page 203
- [Assigning approval policies](#) on page 202

## Related topics

- [Approval processes for IT Shop requests](#) on page 80

# Preparing for delegation

Delegation is a special type of assignment request. It allows an employee to temporarily pass on responsibilities or a role assignment to another person.

## *To run delegation in One Identity Manager*

- In the Designer, set the **QER | ITShop | Delegation** configuration parameter.  
If you disable the configuration parameter at a later date, model components and scripts that are not longer required, are disabled. SQL procedures and triggers are still carried out. For more information about the behavior of preprocessor relevant configuration parameters and conditional compiling, see the *One Identity Manager Configuration Guide*.

Delegations are also subject to a fixed approval process. For delegations, you need a separate **Delegation** assignment resource. In the default installation, this already exists as a product in the **Identity Lifecycle** shop on **Identity Lifecycle** shelf.

The following objects in the default installation can be delegated.

Membership in:	Business roles
	Application roles
Responsibilities for:	Departments
	Cost centers
	Locations
	Business roles
	Employees
	IT Shop Structures (owner)

**TIP:** Specify the role classes associated to business roles for which memberships can be delegated. This option is available when the Business Roles Module is installed.

### ***To permit delegation of a role class***

1. Select the **Business roles > Basic configuration data > Role classes** category.
2. Select the role class in the result list.
3. Select the **Change main data** task.
4. Set **Delegable**.
5. Save the changes.

Use the Web Portal to delegate roles or responsibilities. For more information, see the *One Identity Manager Web Designer Web Portal User Guide* and the *One Identity Manager Business Roles Administration Guide*.

## **Canceling assignments and delegations**

Assignments and delegations can, like all other products, be canceled through the Web Portal. You should limit the delegation time period when you make the request. These requests are automatically canceled when the validity period expires. For more information, see the *One Identity Manager Web Designer Web Portal User Guide*.

### **Detailed information about this topic**

- [Requests with limited validity period](#) on page 159

## **Removing customers from a shop**

If a customer has requested assignments through a shop or has delegated role memberships and is removed from the shop at a later date, the assignment request is closed and the assignments revoked or delegation ended. In this case, however, assignments to roles should be retained if required.

### ***To prevent the assignment from being revoked***

1. In the Designer, set the **QER | ITShop | ReplaceAssignmentRequestOnLeaveCU** configuration parameter.
2. (Optional) Enable the **QER | ITShop | ReplaceAssignmentRequestOnLeaveCU | UID\_PersonFallback** configuration parameter in the Designer.
  - In the **Value** field, enter the **UID\_Person** of the person that should be used as the fallback if no other request recipient can be found.  
  
This person must be a customer in all shops in which which assignments can be requested.
3. Save the changes.



4. In the Manager, select the **Entitlements | Assignment resource for IT Shop** category.
5. In the result list, select an assignment resource and select the **Change main data** task.
6. Set the **Keeps requested assignment resource** option.
7. Save the changes.

This option is enabled by default for the **Role entitlement assignment** default assignment resource. These configuration parameters are disabled by default.

If this option is enabled and the request recipient is removed from the customer node, then the request is updated according to the following rules:

1. If the service item
  - Has the **Retain service item assignment on relocation** option set
  - The request recipient and service item are available in another shopThe assignment request is transferred into this shop. The request recipient remains the same.
2. If by doing this the request recipient does not remain the same, then a new request recipient is determined.
  - a. The manager of the business role or organization that has been requested (PersonWantsOrg.ObjectKeyOrgUsedInAssign).
  - b. A member of the business role or organization that has been requested.
  - c. A member of the chief approval team.
  - d. The employee given in the **QER | ITShop | ReplaceAssignmentRequestOnLeaveCU | UID\_PersonFallback** configuration parameter.

These rules are applied in the order given. The person who is found must be a customer in the shop.

If no authorized approver can be found or the **QER | ITShop | ReplaceAssignmentRequestOnLeaveCU** configuration parameter is disabled, then the assignment request is converted into a direct assignment. If direct assignment for the assigned product is not permitted to the requested business role or organization, the request is canceled and the assignment is removed.

**NOTE:** This option does not influence membership requests in roles or delegation.

Membership assignments are not removed, if the requester is removed from the customer node. They are removed when the recipient of the assignment request is deleted from the customer node.

Delegation ends when the delegate is deleted from the customer node.

## Related topics


- [General main data of an assignment resource](#) on page 66
- [Relocating a customer or product to another shop](#) on page 163

# Setting up assignment resources

## To edit an assignment resource

1. In the Manager, select the **Entitlements > Assignment resource for IT Shop** category.
2. In the result list, select an assignment resource and run the **Change main data** task.
3. Edit the assignment resource's main data.
4. Save the changes.

## To create an assignment resource

1. In the Manager, select the **Entitlements > Assignment resource for IT Shop** category.
2. Click  in the result list.
3. Edit the assignment resource's main data.
4. Save the changes.

## Detailed information about this topic

- [General main data of an assignment resource](#) on page 66

## General main data of an assignment resource

Enter the following main data of an assignment resource.

**Table 21: Main data for an assignment resource**

Property	Description
Assignment resource	Name for the assignment resource.
Resource type	Resource type for grouping assignment resources. For detailed information, see <i>One Identity Manager Identity Management Base Module Administration Guide</i> .
IT Shop	Specifies whether the assignment resource can be requested through the IT Shop. The assignment resource can be requested by an employee through the Web Portal and distributed using a defined approval process. This option cannot be disabled.
Only for use in IT	Specifies whether the assignment resource can be requested

Property	Description
Shop	<p>through the IT Shop. The assignment resource can be requested by an employee through the Web Portal and distributed using a defined approval process. The assignment resource cannot be directly assigned to roles outside the IT Shop.</p> <p>This option cannot be disabled.</p>
Service item	Service item through which you can request the assignment resource in the IT Shop. Assign an existing service item or add a new one.
Table	<p>Table where the assignment should be made.</p> <p>Assignment requests can be limited to a specific hierarchical role. Choose the table from which the role should be selected.</p>
Object	Specific hierarchical role that employees can request. Only one assignment resource can be created per role.
Description	Text field for additional explanation.
Risk index	<p>Value for evaluating the risk of assigning the assignment resource to employees. Set a value in the range <b>0</b> to <b>1</b>. This input field is only visible if the <b>QER   CalculateRiskIndex</b> configuration parameter is set.</p> <p>For detailed information, see <i>One Identity Manager Risk Assessment Administration Guide</i>.</p>
Requested assignments remain intact.	<p>If this option is set, requested role assignments are converted into direct assignments if the request recipient is removed from the customer node of the associate shops.</p> <p>The option can only be edited as long as there is a request has not been assigned with this assignment resource.</p>
Spare field no. 01 ... Spare field no. 10	Additional company-specific information. Use the Designer to customize display names, formats, and templates for the input fields.

## Detailed information about this topic

- [Entering service items](#) on page 22
- [Removing customers from a shop](#) on page 64

## Related topics

- [Requesting memberships in business roles](#) on page 59
- [Requesting memberships in application roles](#) on page 60

## Default assignment resources

One Identity Manager provides standard products for assignment requests and delegation. These are assigned to the **Identity & Access Lifecycle** shop as default assignment resources.

### *To edit default assignment resources*

- In the Manager, select the **Entitlements > Assignment resource for IT Shop > Predefined** category.

## Additional tasks for managing assignment resources

After you have entered the main data, you can run the following tasks.

### The assignment resource overview

Use this task to obtain an overview of the most important information about an assignment resource. For this, you need to take into account the affiliation of the assignment resource to IT Shop structures.

#### *To obtain an overview of a service item*

1. In the Manager, select the **Entitlements > Assignment resource for IT Shop** category.
2. Select the assignment resource in the result list.
3. Select the **Assignment resource overview** task.

## Adding assignment resources to the IT Shop

An assignment resource can be requested by shop customers when it is assigned to an IT Shop shelf.

### *To add a resource assignment to the IT Shop*

1. In the Manager, select the **Entitlements > Assignment resource for IT Shop** category.
2. Select the assignment resource in the result list.
3. Select the **Add to IT Shop** task.
4. In the **Add assignments** pane, assign the assignment resource to the IT Shop shelves.
5. Save the changes.

## Removing assignment resources from the IT Shop

*To remove an assignment resource from all IT Shop shelves.*

1. Select the **Entitlements > Assignment resource for IT Shop** category.
2. Select the assignment resource in the result list.
3. Select the **Add to IT Shop** task.
4. In the **Remove assignments** pane, remove the assignment resource from the IT Shop shelves.
5. Save the changes.

*To remove an assignment resource from all IT Shop shelves.*

1. Select the **Entitlements > Assignment resource for IT Shop** category.
2. Select the assignment resource in the result list.
3. Select the **Remove from all shelves (IT Shop)** task.
4. Confirm the security prompt with **Yes**.
5. Click **OK**.

The One Identity Manager Service removes the assignment resource from all shelves. All assignment requests with this assignment resource are canceled in the process.

## Creating IT Shop requests from existing user accounts, assignments, and role memberships

You can create One Identity Manager requests for existing user accounts, membership in system entitlements, assignments to employees, and hierarchical roles when IT Shop goes into operation. One Identity Manager provides several methods to implement this. Using these methods, requests are created that are completed and approved. These requests can therefore be canceled at a later date. In addition to the initial request data, you can run a custom script from each method that sets other custom properties for a request.

**Table 22: Methods for transforming direct assignments into requests**

Method	Description
CreateITShopOrder (string CustomScriptName)	Creates a request from a direct assignment. This method can be applied to all tables used to find a UID_Person.
CreateITShopOrder (string	Creates an assignment request from an assign-

Method	Description
uidOrgProduct, string uidPersonOrdered, string CustomScriptName)	ment or membership. This method can be applied to all tables that cannot be used to find a UID_Person.
CreateITShopOrder (string uidOrgProduct, string uidWorkdeskOrdered, string uidPersonOrdered, string CustomScriptName)	Creates an assignment request from an assignment or membership and, in addition, saves a UID_WorkdeskOrdered with the request procedure.
CreateITShopWorkdeskOrder (string uidPerson, string CustomScriptName)	Creates a request for a workdesk from a direct assignment. This method can be applied to the WorkDeskHasApp, WorkDeskHasESet and WorkDeskHasDriver tables.

### To run the methods

1. Create a script in the Designer with the Script Editor to call the desired method.

You can find an example script for calling a Customizer method in VB syntax on the One Identity Manager installation medium in the Modules\QBM\AddOn\SDK\ScriptSamples\03 Using database objects\11 Call database object methods.vb directory. You can use this example script as a template to create a script for call the methods described here.

2. Run the script.

You can use the script test from the Script Editor to do this.

For more information about creating scripts, see the *One Identity Manager Configuration Guide*.

If a custom script is included in the method call, then this script will be run immediately before the request is saved in the database.

### An example of a custom script

```
Public Sub CCC_AddCustomPropToRequest(ByRef dbSource As IEntity, ByRef
dbPWO As IEntity)
'Populate values in PWO:
dbPWO.PutValue("OrderReason", "Group membership assignment converted to IT
Shop request automatically.")
End Sub
```

- dbSource: Refers to the source object. For example, ADSAccountInADSGroup, if memberships in Active Directory groups are to be converted in requests.
- dbPWO: Refers to the request to be generated.

# Creating requests for employees

You can create requests for employees or memberships in system entitlements with `CreateITShopOrder` (string `CustomScriptName`). Prepare the IT Shop accordingly in order to create the requests.

## ***To create requests from direct assignments to employees or memberships in system entitlements***

1. Prepare the company resources or system entitlements for use in the IT Shop.
2. Assign the company resources or system entitlements to a shelf in the IT Shop.
3. Link each user account for whose memberships requests are to be created with an employee.
4. Add employees as customers to shops to which the company resources or system entitlements are assigned as products.
5. (Optional): Create a script that populates other properties of the requests.
  - Pass the script name as a `CustomScriptName` parameter to the task.
6. Create a script to run `CreateITShopOrder` (`CustomScriptName` string) for the affected tables.

One Identity Manager creates requests from direct assignments to employees in the following way:

1. Determine employees and their assigned company resources.
2. Determine shops assigned to company resources and employees.
3. Create the requests with initial data.
4. Run custom scripts.
5. Save the requests (entry in the `PersonWantsOrg` table).
6. Assign employees to the product structure (entry in `PersonInITShopOrg` table).
7. Transform direct company resource assignments into indirect assignments to employees (for example, in the `PersonHasQERResource` table).

One Identity Manager creates requests for memberships in system entitlements in the following way:

1. Establish the user accounts and their memberships.
2. Determine the affected employees.
3. Determine the shops to which employees and the system entitlements are assigned.
4. Create the requests with initial data.
5. Run custom scripts.
6. Save the requests (entry in the `PersonWantsOrg` table).

7. Assign employees to the product structure (entry in PersonInITShopOrg table).
8. Transform direct company memberships into indirect memberships for affected user accounts (for example, in the ADSAccountInADSGroup table).

## Related topics

- [Preparing products for requesting](#) on page 21

# Creating user account requests

To assign user accounts to employees, use One Identity Manager account definitions. You can request matching account definitions for existing user accounts linked to the employees through the IT Shop. To create these requests, you can use `CreateITShopOrder` (string `CustomScriptName`). This method can be used for all user account tables (for example, `ADSAccount` or `SAPUser`) and for the `ADSContact`, `EX0MailBox`, `EX0MailContact`, and `EX0MailUser`.

Prepare the IT Shop accordingly in order to create the requests.

### ***To create requests for user accounts***

1. Create an account definition for the target system. Assign the account definition to the target system.  
  
This account definition is used for all user accounts where no account definition is entered. You can miss out this step if all the user accounts are already assigned an account definition.
2. Prepare the account definition for use in the IT Shop.
3. Assign the account definition to a shelf in the IT Shop.
4. Link the user accounts to an employee, if there is no employee already linked.
5. Add employee as customers to shops to which the account definition is assigned as product.
6. (Optional): Create a script that populates other properties of the requests.
  - Pass the script name as a `CustomScriptName` parameter to the task.
7. Create a script that runs the method for the tables affected.

One Identity Manager creates requests for user accounts in the following way:

1. Determine the valid account definition.  
  
If an account definition is already assigned to the user account, it will be used. Otherwise, the account definition of the target system is used.
2. Determine the affected employees.
3. Determine the shops to which employees and the account definition are assigned.



4. Create the requests with initial data.
5. Run custom scripts.
6. Save the requests (entry in the PersonWantsOrg table).
7. Assign employees to the product structure (entry in PersonInITShopOrg table).
8. Transform any possible direct account definition assignments to indirect assignments (entry in PersonHasTSBAccountDef table).

## Related topics

- [Preparing products for requesting](#) on page 21

# Creating workdesk requests

Requests for workdesks are created with `CreateITShopWorkdeskOrder` (string uidPerson, string CustomScriptName). Prepare the IT Shop accordingly in order to create the requests.

## *To create requests from assignments to workdesks*

1. Prepare the company resources (software, system role, or driver) for use in the IT Shop.
2. Assign the company resources to a shelf in the IT Shop.
3. Select an employee as requester for the assignment to workdesks.
  - Pass this employee's UID\_Person as a uidPerson parameter to the task.
4. Add the selected employee as a customer to the shops to which the company resources are assigned as products.
5. (Optional): Create a script that populates other properties of the requests.
  - Pass the script name as a CustomScriptName parameter to the task.
6. Create a script to run `CreateITShopWorkdeskOrder` (string uidPerson, string CustomScriptName) for the affected tables.

One Identity Manager creates requests for workdesk requests in the following way:

1. Determine workdesks and their assigned company resources.
2. Determine requester from the uidPerson parameter.
3. Determine shops assigned to company resources and requester.
4. Create the requests with initial data.
5. Run custom scripts.
6. Save the requests (entry in the PersonWantsOrg table).

7. Assign employees to the product structure (entry in PersonInITShopOrg table).
8. Transform direct company resource assignments into indirect assignments to workdesks (for example, in the WorkDeskHasApp table).

## Related topics

- [Preparing products for requesting](#) on page 21

# Creating assignment requests

You can create assignment requests for existing company resource assignments to hierarchical roles and for memberships of employees, devices, or workdesks in hierarchical roles. The following methods are available.

**Table 23: Methods for transforming direct assignments into assignment requests**

Method	Description
CreateITShopOrder (string uidOrgProduct, string uidPersonOrdered, string CustomScriptName)	Creates an assignment request from an assignment or membership. This method can be applied to all tables which cannot be used to find a UID_Person.
CreateITShopOrder (string uidOrgProduct, string uidWorkdeskOrdered, string uidPersonOrdered, string CustomScriptName)	Creates an assignment request from an assignment or membership and, in addition, saves a UID_WorkdeskOrdered with the request procedure.

Prepare the IT Shop accordingly in order to create the requests.

## ***To create assignment requests from direct assignment to hierarchical roles and role memberships***

1. Select an assignment resource from the **IT Shop | Identity & Access Lifecycle | Shelf: Identity Lifecycle** shelf.
  - Pass the product's UID\_ITShopOrg as the uidOrgProduct parameter to the method.
2. Select an employee from the customer node of the **IT Shop | Identity & Access Lifecycle** shop as a requester for the assignment request.
  - Pass this employee's UID\_Person as a uidPersonOrdered parameter to the method.
3. (Optional): Create a script that populates other properties of the requests.
  - Pass the script name as a CustomScriptName parameter to the method.

4. Create a script to run the `CreateITShopOrder` (string `uidOrgProduct`, string `uidPersonOrdered`, string `CustomScriptName`) method for the affected tables.

**TIP:** You can also create your own assignment resource and assign it to a shelf in any shop. Select an employee as requester for the assignment request from this shop's customer node. For more information, see [Customizing assignment requests](#) on page 62.

One Identity Manager creates assignment requests from existing assignments to hierarchical roles as follows:

1. Determine the hierarchical roles and their assigned company resources and employees (employees, devices, or workdesks).
2. Determine the requester from the `uidPersonOrdered` parameter.
3. Determine the assignment resource from the `uidOrgProduct` parameter.
4. Determine shops assigned to the assignment resource and requester.
5. Create the requests with initial data.
6. Run custom scripts.
7. Save the requests (entry in the `PersonWantsOrg` table).
8. Transform direct company resource assignments to hierarchical roles into indirect assignments to workdesks (for example, in the `DepartmentHasQERResource`) table. Transform direct company memberships to hierarchical roles into indirect memberships (for example, in the `PersonInDepartment`) table.

If the assignment request is to be created for a workdesk, pass the method the workdesk's `UID_WorkDesk` as `uidWorkdeskOrdered` parameter. The method saves this UID as `UID_WorkdeskOrdered` in the request (`PersonWantsOrg` table).

### Detailed information about this topic

- [Standard products for assignment requests and delegation](#) on page 58

### Related topics

- [Preparing products for requesting](#) on page 21

## Adding Active Directory and SharePoint groups to the IT Shop automatically

**Table 24: Configuration parameter for automatically add groups in the IT Shop**

Configuration parameter	Description
QER   ITShop	Preprocessor-relevant configuration parameter for automatically

Configuration parameter	Description
GroupAutoPublish	<p>adding groups to the IT Shop. This configuration parameter specifies whether all Active Directory and SharePoint target system groups are automatically added to the IT Shop. Changes to this parameter require the database to be recompiled.</p> <p>If you disable the configuration parameter at a later date, model components and scripts that are not longer required, are disabled. SQL procedures and triggers are still carried out. For more information about the behavior of preprocessor relevant configuration parameters and conditional compiling, see the <i>One Identity Manager Configuration Guide</i>.</p> <p>In effect in modules: SharePoint Module, Active Directory Module, Active Roles Module</p>
QER   ITShop   GroupAutoPublish   ADSGroupExcludeList	<p>List of all Active Directory groups that are not be automatically assigned to the IT Shop. Names are listed in a pipe ( ) delimited list that is handled as a regular search pattern.</p> <p>Example:</p> <pre>.*Administrator.* Exchange.* .*Admins .*Operators IIS_IUSRS</pre> <p>In effect in modules: Active Directory Module, Active Roles Module</p>
TargetSystem   ADS   ARS_SSM	<p>Preprocessor relevant configuration parameter for controlling the database model components for Active Roles Self-Service Management in the One Identity Manager IT Shop. If the parameter is set, Self-Service Management components are available. Changes to this parameter require the database to be recompiled.</p> <p>If you disable the configuration parameter at a later date, model components and scripts that are not longer required, are disabled. SQL procedures and triggers are still carried out. For more information about the behavior of preprocessor relevant configuration parameters and conditional compiling, see the <i>One Identity Manager Configuration Guide</i>.</p> <p>In effect in module: Active Roles Module</p>

### To add groups automatically to the IT Shop

1. In the Designer, set the configuration parameter for automatically adding groups to the IT Shop depending on existing modules.
2. Compile the database.

The groups are added automatically to the IT Shop from now on.

- Synchronization ensures that the groups are added to the IT Shop. If necessary, you can manually start synchronization with the Synchronization Editor.
- New groups created in One Identity Manager are added to the IT Shop.

The following steps are run to add a group to the IT Shop.

1. A service item is determined for the group.

The service item is tested and modified for each group as required. The service item name corresponds to the name of the group. The service item is assigned to one of the default service categories.

- The service item is modified for groups with service items.
- Groups without service items are allocated new service items.

2. An application role for product owners is determined and the service item is assigned. Product owners can approve requests for membership in these groups. By default, the group's account manager or owner is established as the product owner.

**NOTE:** The application role for the product owner must be added under the **Request & Fulfillment | IT Shop | Product owner** application role.

- If the account manager or owner of the group is already a member of an application role for product owners, this application role is assigned to the service item. Therefore, all members of this application role become product owners of the group.
- If the account manager or owner of the group is not yet a member of an application role for product owners, a new application role is created. The name of the application corresponds to the name of the account manager or owner.
  - If the account manager or owner is a user account, the user account's employee is added to the application role.
  - If it is a group of account managers or owners, the employees of all this group's user accounts are added to the application role.
- If the group does not have an account manager or owner, the **Request & Fulfillment | IT Shop | Product owner | Without owner in AD/SharePoint** default application role is used.

3. The group is labeled with the **IT Shop** option and assigned to the **Active Directory groups** or **SharePoint groups** IT Shop shelf in the **Identity & Access Lifecycle** shop.

Then the shop customers can request group memberships through the Web Portal.

**NOTE:** When a One Identity Manager group is irrevocably deleted from the database, the associated service item is also deleted.

## Related topics

- [Entering service items](#) on page 22
- [Deleting unused application roles for product owners](#) on page 78
- [Product owners](#) on page 196

# Deleting unused application roles for product owners

The list of product owner application roles can quickly become confusing when groups are automatically added to the IT Shop. This is because an application role is added for each account manager. These application roles are no longer required when a groups are deleted.

Redundant application roles for product owners can be deleted through a scheduled process task. This deletes all the application role from the database for which the following applies:

- The parent application role is **Request & Fulfillment | IT Shop | Product owner**.
- The application role is not assigned to a service item.
- The application role is not assigned to a service category.
- The application role does not have members.

## *To delete application roles automatically*

- In the Designer, configure and enable the **Cleans up application role "Request & Fulfillment | IT Shop | Product owners"** schedule.

## Related topics

- [Adding Active Directory and SharePoint groups to the IT Shop automatically](#) on page 75
- [Product owners](#) on page 196

# Adding Privileged Account Management user groups to the IT Shop automatically

Using the following steps, you can add local PAM user groups to the IT Shop automatically. Synchronization ensures that the user groups are added to the IT Shop. If necessary, you can manually start synchronization with the Synchronization Editor.

**| NOTE:** Directory group are not added to the IT Shop automatically.

## *To add local PAM user groups to the IT Shop automatically*

1. In the Designer, set the **QER | ITShop | PAGUsrGroupAutoPublish** configuration parameter.

From this time on, local PAM user groups are added to the IT Shop automatically.

2. In order not to add local PAM user groups to the IT Shop automatically, in the Designer, set the **QER | ITShop | PAGUsrGroupAutoPublish | PAGUsrGroupExcludeList** configuration parameter.

This configuration parameter contains a listing of all PAM user groups that should not be allocated to the IT Shop automatically.

You can extend this list if required. To do this, enter the name of the user groups in the configuration parameter using a pipe (|) delimited list.

3. Assign the employees that are allowed to make approval decisions about local user group request to the **Request & Fulfillment | IT Shop | Product owners | PAM user groups** application role.

The **Approval of PAM user group membership requests** approval policy establishes product owners of the user groups as approvers. If no product owners are found, the requests are presented to the target system managers for approval.

The following steps are run to add a local PAM user group to the IT Shop automatically.

1. A service item is determined for the user group.

The service item is tested for each user groups and modify is required. The service item name corresponds to the name of the group.

- The service item is modified for groups with service items.
- Groups without service items are allocated new service items.

2. The service item is assigned to the **PAM user groups** service category by default.
3. The **Request & Fulfillment | IT Shop | Product owners | PAM user groups** application role is assigned to the service item as the product owner.
4. The user group is labeled with the **IT Shop** option and assigned to the **PAM user groups** IT Shop shelf in the **Identity & Access Lifecycle** shop.

Then the shop customers can request group memberships through the Web Portal.

## Related topics

- [Product owners](#) on page 196

## Approval processes for IT Shop requests

All IT Shop requests are subject to a defined approval process. During this approval process, authorized employees grant or deny approval for the product assignments. You can configure this approval process in various ways and therefore customize it to meet your company policies.

You define approval policies and approval workflows for approval processes. Specify which approval workflows are going to be used for the request in the approval policies. Use approval workflows to specify which employee is authorized to grant or deny approval for the request at the time it was placed. An approval workflow can contain a number of approval levels, and this can, in turn, contain several approval steps, for example, when several management hierarchy layers need to give approval for a request. A special approval procedure is used to determine the approvers in each approval procedure.

In the default installation, different default approval policies are assigned to the **Identity & Access Lifecycle** shop. Therefore, requests from this shop are run through predefined approval processes. Assign an approval policy to the shop, the shelf or the service item of the **Identity & Access Lifecycle** shelf if requests from this shop should go through customized approval process.

### Detailed information about this topic


- [Approval policies for requests](#) on page 80
- [Approval workflows for requests](#) on page 84
- [Editing approval levels](#) on page 88
- [Default approval procedures](#) on page 99

## Approval policies for requests

One Identity Manager uses approval policies to determine the approver for each request process.






### To edit an approval policy

1. Select the **IT Shop > Basic configuration data > Approval policies** category.
2. Select an approval policy in the result list and run the **Change main data** task.
  - OR -
  - Click  in the result list.
3. Edit the approval policy main data.
4. Save the changes.

## General main data of approval policies

Enter the following main data of an approval policy. If you add a new approval step, you must fill out the compulsory fields.

**Table 25: General main data of approval policies**

Main data	Meaning
Approval policies	Approval policy name.
Role type	Role type to determine inheritance of approval policies within an IT Shop solution. Add the required role types in <b>IT Shop &gt; Basic configuration data &gt; Roles types</b> category.
Priority	An integral number with a maximum of one digit.  A priority is used to decided which approval policy should be used if several approval policies are found to be valid following the given rules. The highest priority has the largest number.
Approval workflow	Workflow for determining approvers when a product is requested. Select any approval workflow from the menu or click  to set up a new workflow.
Renewal workflow	Approval workflow for determining approvers when a product is renewed. Select any approval workflow from the menu or click  to set up a new workflow.  If no renewal workflow is specified, the approval workflow of the request is used when the request is renewed (UID_SubMethodOrderProduct).
Cancellation workflow	Approval workflow for determining approvers when a requested product is canceled.  Select any approval workflow from the menu or click  to set up a new workflow.  If there is no cancellation workflow given, cancellation is approved immedi-

Main data	Meaning
	ately.
Mail templates	Mail template used for creating email notifications for granting or denying approval for a request and extended, expired, or canceled requests.
Description	Text field for additional explanation.

### Detailed information about this topic

- [Determining the effective approval policies](#) on page 97
- [Role types for the IT Shop](#) on page 192
- [Setting up approval workflows](#) on page 87
- [Notifications in the request process](#) on page 168

## Default approval policies

One Identity Manager supplies service items by default. These approval policies are used in the **Identity & Access Lifecycle** shop approval processes. You can store mail templates with default approval policies for sending notifications during the request process and specifying a priority.

### To edit default approval policies

- In the Manager, select the **IT Shop > Basic configuration data > Approval policies > Predefined** category.

## Additional tasks for approval policies

After you have entered the main data, you can run the following tasks.

## The approval policy overview

On the overview form, you see, at a glance, the most important information about an approval policy.

### To obtain an overview of an approval policy

1. In the Manager, select the **IT Shop > Basic configuration data > Approval policies** category.

2. Select the approval policy in the result list.
3. Select the **Approval policy overview** task.

## Adding to the IT Shop

You can assign approval policies to shops, shopping centers, or shelves. The approval policy is applied to the request from the respective IT Shop nodes if there are no approval policies assigned to child IT Shop nodes. For more information, see [Determining the effective approval policies](#) on page 97.

### *To assign an approval policy to shops, shopping centers, or shelves*

1. In the Manager, select the **IT Shop > Basic configuration data > Approval policies** category.
2. In the result list, select the approval policy.
3. Select the **Add to IT Shop** task.

In the **Add assignments** pane, assign the shops, shopping centers, or shelves.

**TIP:** In the **Remove assignments** pane, you can remove shop, shopping center, or shelf assignments.

#### **To remove an assignment**

Select the shop, shopping center, or shelf and double-click .

4. Save the changes.

## Validity checking

Once you have edited an approval policy, you need to test it. This checks whether the approval steps can be used in the approval workflows in this combination. Non-valid approval steps are displayed in the error window.

### *To test an approval policy*

1. In the Manager, select the **IT Shop > Basic configuration data > Approval policies** category.
2. Select the approval policy in the result list.
3. Select the **Validity check** task.

## Editing approval workflows

You can edit approval workflow that are assigned an approval policy here.

### ***To edit approval workflow properties***

1. In the Manager, select the **IT Shop > Basic configuration data > Approval policies** category.
2. Select the approval policy in the result list.
3. To edit the approval workflow for requests, select task **1. Edit approval workflow**.
4. To edit the renewal workflow for requests, select task **2. Edit approval workflow**.
5. To edit the cancellation workflow, select task **3. Edit approval workflow**.
6. This opens the Workflow Editor.

### **Detailed information about this topic**


- [Working with the workflow editor](#) on page 84

## **Approval workflows for requests**

You need to allocate an approval workflow to the approval policies in order to find the approvers. In an approval workflow, you specify the approval procedures, the number of approvers and a condition for selecting the approvers.

Use the workflow editor to create and edit approval workflows.


### ***To edit an approval workflow***

1. In the Manager, select the **IT Shop > Basic configuration data > Approval workflows** category.
2. Select the approval workflow in the result list and run the **Change main data** task.  
- OR -  
Click  in the result list.  
This opens the Workflow Editor.
3. Edit the approval workflow main data.
4. Save the changes.

## **Working with the workflow editor**

Use the workflow editor to create and edit approval workflows. The workflow editor allows approval levels to be linked together. Multi-step approval processes are clearly displayed in a graphical form.

**Figure 4: Workflow editor**

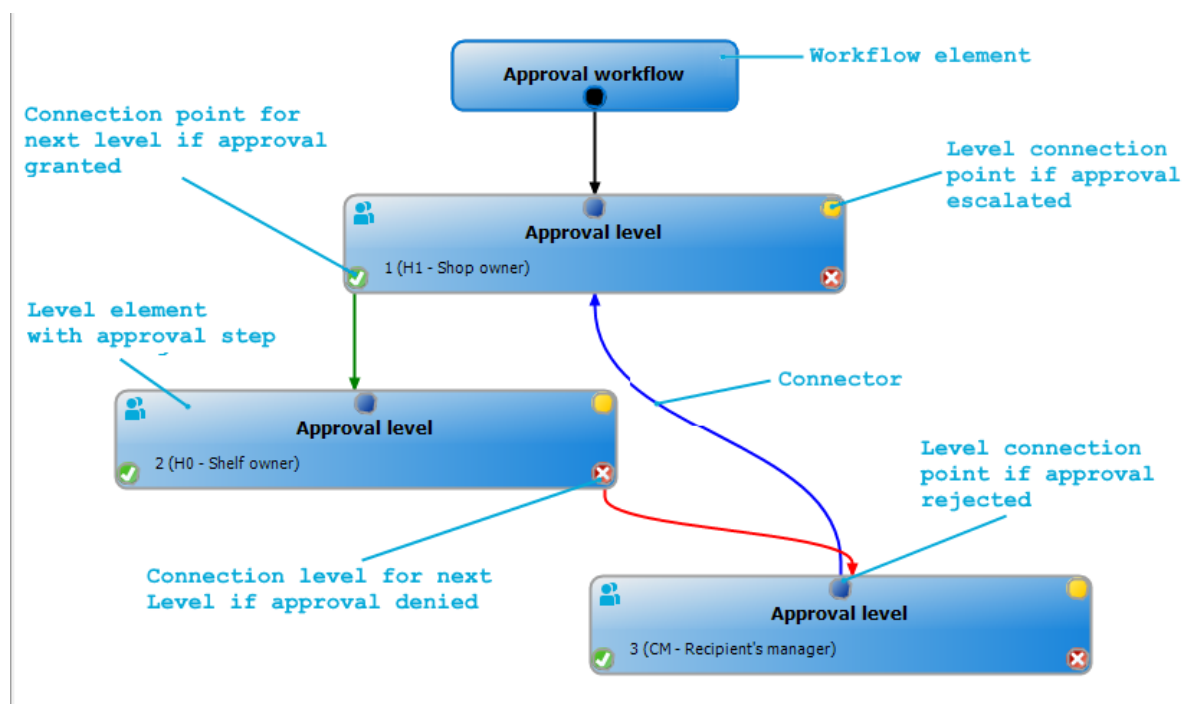

Approval levels and approval steps belonging to the approval workflow are edited in the workflow editor using special control elements. The workflow editor contains a toolbox. The toolbox items are activated or deactivated depending on how they apply to the control. You can move the layout position of the control elements in the workflow editor with the mouse or these can be moved automatically.

**Table 26: Entries in the toolbox**

Control	Item	Meaning
Workflow	Edit	Edit the properties of the approval workflow.
	Layout automatically	The workflow elements are aligned automatically. The workflow layout is recalculated.
Approval levels	Add	A new approval level is added to the workflow.
	Edit	Edit the properties of the approval workflow.
	Delete	Deletes the approval level.
Approval steps	Add	Add a new approval step to the approval level.
	Edit	Edit the properties of the approval step.
	Delete	Deletes the approval step.
Assignments	Remove positive	The <b>Approved</b> connector for the selected approval level is deleted.


Control	Item	Meaning
	Remove negative	The <b>Deny</b> connector for the selected approval level is deleted.
	Remove reroute	The <b>Reroute</b> connector for the selected approval level is deleted.
	Remove escalation	The <b>Escalate</b> connector for the selected approval level is deleted.

Each of the controls has a properties window for editing the data of the approval workflow, level, or step. To open the properties window, select the **Toolbox | <Control> | Edit** item.

To delete a control, select the element and then the **Toolbox | <Control> | Delete** item.

Individual elements are linked to each other with a connector. Activate the connection points with the mouse. The cursor changes into an arrow icon for this. Hold down the left mouse button and pull a connector from one connection point to the next.

**Figure 5: Approval workflow connectors**

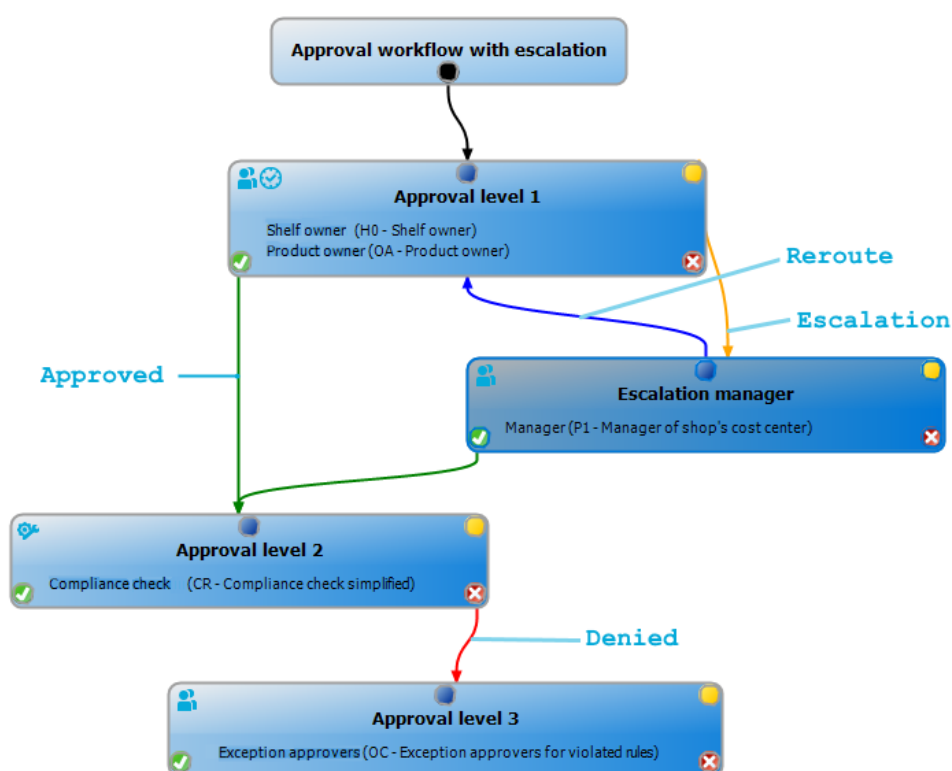

**Table 27: Approval workflow connectors**





Connector	Meaning
Approve	Link to next approval level if the current approval level was granted approval.
Deny	Link to next approval level if the current approval level was not granted approval.
Reroute	Link to other approval levels to bypass the current approval.
Escalation	Connection to another approval level when the current approval level is escalated after timing out.

By default, a connection between workflow elements and level elements is created immediately when a new element is added. If you want to change the level hierarchy, drag a new connector to another level element.

Alternatively, you can release connectors between level elements using the **Toolbox | Assignments** items. To do this, mark the level element where the connector starts. Then add a new connector.

Different icons are displayed on the level elements depending on the configuration of the approval steps.

**Table 28: Icons on the level elements**

Icon	Meaning
	The approval decision is made by the system.
	The approval decision is made manually.
	The approval step contains a reminder function.
	The approval step contains a timeout.

Changes to individual elements in the workflow do not take place until the entire approval workflow is saved. The layout position in the workflow editor is saved in addition to the approval policies.

## Setting up approval workflows

An approval workflow consists of one or more approval levels. An approval level can contain one approval step or several parallel approval steps. Within the approval process, all of the approval steps for one approval level must be run before the next approval level is called. Use connectors to set up the sequence of approval levels in the approval workflow.

When you add a new approval workflow, the first thing to be created is a new workflow element.

### ***To edit approval level properties***

1. Open the Workflow Editor.
2. Select the **Toolbox > Workflow > Edit** item.
3. Edit the workflow properties.
4. Click **OK**.

**Table 29: Approval workflow properties**

Property	Meaning
Name	Approval workflow name.
System halt (days)	Number of days to elapse after which the approval workflow, and therefore the system, automatically halts the entire approval process.
Description	Text field for additional explanation.

### **Detailed information about this topic**

- [Halting a request on timeout](#) on page 146

## **Editing approval levels**

An approval level provides a method of grouping individual approval steps. All the approval steps in one approval level are run in parallel. All the approval steps for different approval levels are run one after the other. You use the connectors to specify the order.

Specify the individual approval steps in the approval levels. At least one approval step is required per level. Enter the approval steps first before you add an approval level.

### ***To add an approval level***

1. Select the **Toolbox | Approval levels | Add** item.  
This opens the properties dialog for the first approval step.
2. Enter the approval step properties.
3. Save the changes.

You can edit the properties of an approval level as soon as you have added an approval level with at least one approval step.

### ***To edit approval level properties***

1. Select the approval level.
2. Select the **Toolbox > Approval levels > Edit** item.
3. Enter a display name for the approval level.
4. Save the changes.



**NOTE:** You can define more than one approval step for each approval level. In this case, the approvers of an approval level can make a decision about a request in parallel rather than sequentially. The request cannot be presented to the approvers at the next approval level until all approval steps of an approval level have been completed within the approval process.

#### ***To add more approval steps to an approval level***

1. Select the approval level.
2. Select the **Toolbox > Approval levels > Add** item.
3. Enter the approval step properties.
4. Save the changes.

#### **Detailed information about this topic**

- [Properties of an approval step](#) on page 89
- [Editing approval steps](#) on page 89

## **Editing approval steps**

#### ***To edit approval level properties***

1. Select the approval step.
2. Select the **Toolbox > Approval steps > Edit** item.
3. Edit the approval step properties.
4. Save the changes.

#### **Detailed information about this topic**


- [Properties of an approval step](#) on page 89

## **Properties of an approval step**

On the **General** tab, enter the data described below. On the **Mail templates** tab, select the mail templates for generating mail notifications. If you add a new approval step, you must fill out the required fields.

**Table 30: General properties of an approval step**

<b>Property</b>	<b>Meaning</b>
Single step	Approval step name.
Approval	Procedure to use for determining the approvers.

Property	Meaning
procedure	
Processing status	Processing status of the success or failure case of the approval step. The processing status for the request is set according to the decision and whether it has been made positively or negatively. Define the processing status in the basic configuration data.
Role	Hierarchical role from which the approvers are to be determined using the default approval procedures OM and OR.
Fallback approver	<p>Application role whose members are authorized to approve requests if an approver cannot be determined through the approval procedure. Assign an application from the menu.</p> <p>To create a new application role, click . Enter the application role name and assign a parent application role. For detailed information, see the <i>One Identity Manager Authorization and Authentication Guide</i>.</p> <p><b>NOTE:</b> The number of approvers is not applied to the fallback approvers. The approval step is considered approved the moment as soon as one fallback approver has approved the request.</p>
Relevance for compliance	<p>Specifies whether the approver is notified when a request leads to a rule violation. The following values are permitted:</p> <ul style="list-style-type: none"> <li>• <b>Not relevant:</b> Information about rule violations is not relevant for approvers in this approval step. No additional information is displayed for the approver in the approval process.</li> <li>• <b>Information:</b> Approvers in this approval step receive information during the approval process if the request causes a compliance rule violation. The approvers decided whether to grant or deny the request.</li> <li>• <b>Necessary measures:</b> Approvers in this approval step receive information during the approval process if the request causes a compliance rule violation. The request is automatically denied.</li> </ul>
Condition	<p>Condition for calculating approval with approval procedures CD, EX, or WC.</p> <p>Comparison value for the risk index in the approval procedure RI. Enter a number in the range 0.1 to 1.0. 1.0. You can use , or . as a decimal point.</p>
Number of approvers	<p>Number of approval required to approve a request. Use this number to further restrict the maximum number of approvers of the implemented approval procedure.</p> <p>If there are several people allocated as approvers, then this number specifies how many people from this group have to approve a request. A request can only be passed on to the next level if this has been done.</p> <p>If you want approval decisions to be made by all the employees found using the applicable approval procedure, for example all members of a role</p>

Property	Meaning
	<p>(default approval procedure OR), enter the value <b>-1</b>. This overrides the maximum number of approvers defined in the approval procedure.</p> <p>If not enough approvers can be found, the approval step is presented to the fallback approvers. The approval step is considered approved as soon as one fallback approver has approved the request.</p> <p>If an approval decision is made by the chief approval team, it overrides the approval decision of just one regular approver. This means, if three approvers must approve an approval step and the chief approval team makes a decision, two more are still required.</p> <p>The number of approvers defined in an approval step is not taken into account in the approval procedures CD, EX, or WC.</p>
Description	Text field for additional explanation.
Approval reason	<p>Reason entered in the request if approval is automatically granted.</p> <p>This field is only shown for the approval procedures CD, CR, RI, SB, EX, and WC. In the CR approval procedure, you can use the wild card <b>{0}</b> in the text. The place holder syntax corresponds to a format place holder in VB.Net ({0} to {9})</p>
Reject reason	<p>Reason entered in the request and the approval history, if approval is automatically denied.</p> <p>This field is only shown for the approval procedures CD, CR, RI, SB, EX, and WC. In the CR approval procedure, you can use the wild card <b>{0}</b> in the text. The place holder syntax corresponds to a format place holder in VB.Net ({0} to {9})</p>
Reminder interval (hours)	<p>Number of working hours to elapse after which the approver is notified by mail that there are still pending requests for approval.</p> <p><b>NOTE:</b> Ensure that a state, county, or both is entered into the employee's main data of determining the correct working hours. If this information is missing, a fallback is used to calculate the working hours. For more information about calculating employees' working hours, see the <i>One Identity Manager Identity Management Base Module Administration Guide</i>.</p> <p><b>TIP:</b> Weekends and public holidays are taken into account when working hours are calculated. If you want weekends and public holidays to be dealt with in the same way as working days, set the <b>QBM   WorkingHours   IgnoreHoliday</b> oder <b>QBM   WorkingHours   IgnoreWeekend</b> configuration parameter. For more information about this, see the <i>One Identity Manager Configuration Guide</i>.</p> <p>If more than one approver was found, each approver will be notified. The same applies if an additional approver has been assigned.</p> <p>If an approver delegated the approval, the time point for reminding the delegation recipient is recalculated. The delegation recipient and all the</p>

Property	Meaning
	<p>other approvers are notified. The original approver is not notified.</p> <p>If an approver has made an inquiry, the time point for reminding the queried employee is recalculated. As long as the inquiry has not been answered, only this employee is notified.</p>
TimeOut (working hours)	<p>Number of working hours to elapse after which the approval step is automatically granted or denied approval.</p> <p>The working hours of the respective approver are taken into account when the time is calculated.</p> <p><b>NOTE:</b> Ensure that a state, county, or both is entered into the employee's main data of determining the correct working hours. If this information is missing, a fallback is used to calculate the working hours. For more information about calculating employees' working hours, see the <i>One Identity Manager Identity Management Base Module Administration Guide</i>.</p> <p><b>TIP:</b> Weekends and public holidays are taken into account when working hours are calculated. If you want weekends and public holidays to be dealt with in the same way as working days, set the <b>QBM   WorkingHours   IgnoreHoliday</b> oder <b>QBM   WorkingHours   IgnoreWeekend</b> configuration parameter. For more information about this, see the <i>One Identity Manager Configuration Guide</i>.</p> <p>If more than one approver was found, then an approval decision for the approval step is not automatically made until the timeout for all approvers has been exceeded. The same applies if an additional approver has been assigned.</p> <p>If an approver delegated approval, the time point for automatic approval is recalculated for the new approver. If this approval is rejected, the time point for automatic approval is recalculated for the original approver.</p> <p>If an approver is queried, the approval decision must be made within the defined timeout anyway. The time point for automatic approval is not recalculated.</p> <p>If additional approvers are determined by recalculating the current approvers, then the automatic approval deadline is not extended. The additional approvers must approve within the time frame that applies to the current approver.</p>
Timeout behavior	<p>Action that is run if the timeout expires.</p> <ul style="list-style-type: none"> <li>• <b>Approved:</b> The request is approved in this approval step. The next approval level is called.</li> <li>• <b>Deny:</b> The request is denied in this approval step. The approval level for denying is called.</li> <li>• <b>Escalation:</b> The request process is escalated. The escalation approval level is called.</li> </ul>

Property	Meaning
	<ul style="list-style-type: none"> <li>• <b>Cancel</b>: The approval step, and therefore the entire approval process for the request, is canceled.</li> </ul>
Additional approver possible	<p>Specifies whether a current approver is allowed to instruct another employee as an approver. This additional approver has parallel authorization to make approvals for the current request. The request is not passed on to the next approval level until both approvers have made a decision.</p> <p>This option can only be set for approval levels with a single, manual approval step.</p>
Approval can be delegated	<p>Specifies whether a current approver can delegate the approval of the request to another employee. This employee is added to the current approval step as the approver. This employee then makes the approval decision instead of the approver who made the delegation.</p> <p>This option can only be set for approval levels with a single, manual approval step.</p>
Approval by affected employee	<p>Specifies whether the employee who is affected by the approval decision can also approve this request. If this option is set, requester, and request recipients can approve the request.</p> <p>If this option is not set, use the <b>QER   ITShop   PersonInsertedNoDecide</b>, <b>QER   ITShop   PersonOrderedNoDecide</b>, <b>QER   ITShop   PersonInsertedNoDecideCompliance</b>, and <b>QER   ITShop   PersonOrderedNoDecideCompliance</b> configuration parameters to specify for all requests whether requester and request recipient can approve the request.</p>
Do not show in approval history	<p>Specifies whether or not the approval step should be displayed in the approval history. For example, this behavior can be applied to approval steps with the <b>CD - calculated approval</b> procedure, which are used only for branching in the approval workflow. It makes it easier to follow the approval history.</p>
No automatic approval	<p>Specifies whether the approval step is decided manually. The request is presented again to an approver even if they are the requester themselves or the request has been approved in a previous approval step. The setting of the <b>DecisionOnInsert</b>, <b>ReuseDecision</b> and <b>AutoDecision</b> configuration parameters is ignored in this approval step.</p>
Escalate if no approver found	<p>Specifies whether the approval step is escalated if no approver can be found and no fallback approver is assigned. In this case, the request is neither canceled nor passed to the chief approval team.</p> <p>This option can only be enabled if an approval level is linked to escalation. The option cannot be enabled if the approval step uses the approval procedure OC or OH.</p>

## Detailed information about this topic

- [Request risk analysis](#) on page 122
- [Notifications in the request process](#) on page 168
- [Processing status](#) on page 188
- [Reminding approvers](#) on page 169
- [Escalating an approval step](#) on page 141
- [Automatic approval on timeout](#) on page 144
- [Halting a request on timeout](#) on page 146
- [Automatically approving requests](#) on page 134
- [Using specific roles to find approvers](#) on page 105
- [Waiting for further approval](#) on page 111
- [Approvals to be made externally](#) on page 113
- [Calculated approval](#) on page 112

## Related topics

- [Selecting responsible approvers](#) on page 99
- [Approvers cannot be established](#) on page 143
- [Approval by the chief approval team](#) on page 148
- [Approving requests from an approver](#) on page 132
- [Restricting exception approvers](#) on page 129

## Connecting approval levels

When you set up an approval workflow with several approval levels, you have to connect each level with another. You may create the following links.

**Table 31: Links to approval levels**

Link	Description
Approve	Link to next approval level if the current approval level was granted approval.
Deny	Link to next approval level if the current approval level was not granted approval.
Reroute	Link to another approval level to bypass the current approval.  Approvers can pass the approval decision through another approval level, for example, if approval is required by a manager in an individual case. To do this, create a connection to the approval levels to which the approval can be

Link	Description
	<p>rerouted. This way, approvals can also be rerouted to a previous approval level, for example, if an approval decision is considered not to be well-founded. Starting from one approval level, more than one reroute can lead to different approval levels. The approvers select, in the Web Portal, which of these approval levels to reroute the approval to.</p> <p>It is not possible to reroute approval steps with the approval procedures OC, OH, EX, CR, CD, SB, or WC.</p>
Escalation	Link to another approval level when the current approval level is escalated after timing out.

If there are no further approval levels after the current approval level, the request is considered approved if the approval decision was to grant approval. If approval is not granted, the request is considered to be finally denied. The approval method is closed in both cases.

## Additional tasks for approval workflows

After you have entered the main data, you can run the following tasks.

### The approval workflow overview

#### *To obtain an overview of an approval workflow*

1. In the Manager, select the **IT Shop > Basic configuration data > Approval workflows** category.
2. Select the approval workflow in the result list.
3. Select **Approval workflow overview**.

### Copying approval workflows

You can copy default approval workflows in order to customize them.

#### *To copy an approval workflow*


1. In the Manager, select the **IT Shop > Basic configuration data > Approval workflows** category.
2. Select an approval workflow in the result list and run the **Change main data** task.
3. Select the **Copy workflow** task.

4. Enter a name for the copy.
5. Click **OK** to start copying.
  - OR -
  - Click **Cancel** to cancel copying.
6. To edit the copy immediately, click **Yes**.
  - OR -
  - To edit the copy later, click **No**.

## Deleting approval workflows

The approval workflow can only be deleted if it is not assigned to an approval policy.

### *To delete an approval workflow*

1. Remove all assignments to approval policies.
  - a. Check to which approval policies the approval workflow is assigned.
  - b. Go to the main data form for the approval policy and assign a different approval workflow.
2. In the Manager, select the **IT Shop > Basic configuration data > Approval workflows** category.
3. Select an approval workflow in the result list.
4. Click .
5. Confirm the security prompt with **Yes**.

### Detailed information about this topic

- [The approval workflow overview](#) on page 95
- [General main data of approval policies](#) on page 81

## Default approval workflows

One Identity Manager provides approval workflows by default. These approval workflows are used in the **Identity & Access Lifecycle** shop approval processes. Each default approval workflow is linked to a default approval policy. You can edit different properties of the approval step, for example, to configure notifications in the request process.

### *To edit default approval workflows*

- In the Manager, select the **IT Shop > Basic configuration data > Approval workflows > Predefined** category.



# Determining the effective approval policies

You can apply approval policies to different IT Shop structures and service items. If you have several approval policies within your IT Shop, which policy is to be used is based on the rules that are specified.

Effective approval policies are defined in the following way:

1. The effective approval policy is the one assigned to the requested service item.
2. If there is no approval policy assigned to the service item, the approval policy from the service category is used.
3. If there is no approval policy assigned to the service item, the approval policy assigned to the requested product's shelf is used.
4. If there is no approval policy assigned to the shelf, one of the approval policies assigned to the shop is used.
5. If there is no approval policy assigned to the shop, one of the approval policies assigned to the shopping center is used.

An approval policy found by one of these methods is applied under the following conditions:

- The approval policy is not assigned a role type.
- OR -
- The assigned role type corresponds to the shelf role type.

If more several effective approval policies are identified by the rules, the effective approval policy is determined by the following criteria (in the given order).

1. The approval policy has the highest priority (alphanumeric sequence).
2. The approval policy has the lowest number of approval steps.
3. The first approval policy found is taken.

Furthermore:

- If no approval policy can be found for a product, a request cannot be started.  
The same applies for renewals and unsubscriptions.
- If no approver can be determined for one level of an approval policy, the request can be neither approved nor denied.
  - Pending requests are rejected and closed.
  - Unsubscriptions cannot be approved. Therefore, unsubscribed products remain assigned.
  - Renewals cannot be approved. Therefore, products for renewal remain assigned until the **valid until** date is reached.

**NOTE:** If an approval workflow for pending requests changes, you must decide how to proceed with these requests. Configuration parameters are used to define the desired procedure.

For more information, see [Changing approval workflows of pending requests](#) on page 163.

### Related topics

- [Approvers for renewals](#) on page 98
- [Approvers for unsubscriptions](#) on page 98
- [Requests with limited validity period](#) on page 159

## Approvers for renewals

Once the currently effective approval policy has been identified, the actual approvers are determined by the approval workflow specified by it. When requests are renewed, a renewal workflow is run. If no renewal workflow is stored with the approval policy, approvers are determined by the approval workflow.

If no approvers can be identified for a renewal, then the renewal is denied. The product remains assigned only until the **Valid until** date. The request is then canceled and the assignment is removed.

### Related topics

- [Canceling or unsubscribing requests](#) on page 161
- [Renewing requests](#) on page 160
- [Determining the effective approval policies](#) on page 97

## Approvers for unsubscriptions

Once the currently effective approval policy has been identified, the actual approvers are determined by the approval workflow specified by it. When a product is unsubscribed, the cancellation workflow runs. If no unsubscribe workflow is stored with the approval policy, approvers are determined by the approval workflow.

If no approvers can be determined for an unsubscription, then the unsubscription is denied. The product remains assigned.

### Related topics

- [Determining the effective approval policies](#) on page 97

# Selecting responsible approvers

One Identity Manager can make approvals automatically in an approval process or through approvers. An approver is an employee or a group of employees who can grant or deny approval for a request (renewal or cancelation) within an approval process. It takes several approval procedures to grant or deny approval. You specify in the approval step which approval procedure should be used.

If several people are determined to be approvers by an approval procedure, the number given in the approval step specifies how many people must approve the step. Only then is the request presented to the approvers in the next approval level. The request is canceled if an approver cannot be found for an approval step.

One Identity Manager provides approval procedures by default. You can also define your own approval procedures.

The DBQueue Processor calculates which employee is authorized as an approver and in which approval level. The calculation is triggered by the **IT Shop approver** schedule. Take into account the special cases for each approval procedure when setting up the approval workflows to determine those authorized to grant approval.

## Default approval procedures

The following approval procedures are defined to select the responsible approvers by default.

**Table 32: Approval procedures for IT Shop requests**

Approval procedure name	Responsible approvers
BR - Back to recipient	Employee who receives the request For more information, see <a href="#">Finding requesters</a> on page 115.
BS - Back to requester	Employee who trigger the request For more information, see <a href="#">Finding requesters</a> on page 115.
CD - Calculated approval	- For more information, see <a href="#">Calculated approval</a> on page 112.
CM - Recipient's manager	Manager For more information, see <a href="#">Using request recipients to find approvers</a> on page 104.
CR - Compliance check	-

Approval procedure name	Responsible approvers
(simplified)	For more information, see <a href="#">Compliance checking requests</a> on page 124.
D0 - Manager of shelf's department	Manager and deputy manager For more information, see <a href="#">Using IT Shop structures to find approvers</a> on page 103.
D1 - Manager of shop's department	Manager and deputy manager For more information, see <a href="#">Using IT Shop structures to find approvers</a> on page 103.
D2 - Manager of shopping center's department	Manager and deputy manager For more information, see <a href="#">Using IT Shop structures to find approvers</a> on page 103.
DI - Named (IT) approvers of department provided in request	All members of the assigned application role For more information, see <a href="#">Using departments to find approvers</a> on page 110.
DM - Manager of recipient's department	Manager and deputy manager For more information, see <a href="#">Using request recipients to find approvers</a> on page 104.
DP - Manager of department provided in request	Manager and deputy manager For more information, see <a href="#">Using departments to find approvers</a> on page 110.
DR - Named approvers of department provided in request	All members of the assigned application role For more information, see <a href="#">Using departments to find approvers</a> on page 110.
EX - Approvals to be made externally	- For more information, see <a href="#">Approvals to be made externally</a> on page 113.
H0 - Shelf owner	Owner and deputy For more information, see <a href="#">Using IT Shop structures to find approvers</a> on page 103.
H1 - Shop owner	Owner and deputy For more information, see <a href="#">Using IT Shop structures to find approvers</a> on page 103.
H2 - Shopping center owner	Owner and deputy For more information, see <a href="#">Using IT Shop structures to find approvers</a> on page 103.

Approval procedure name	Responsible approvers
ID - Named (IT) approvers of recipient's department	All members of the assigned application role For more information, see <a href="#">Using approval roles to find approvers</a> on page 107.
IL - Named (IT) approvers of recipient's location	All members of the assigned application role For more information, see <a href="#">Using approval roles to find approvers</a> on page 107.
IO - Named (IT) approvers of recipient's primary role	All members of the assigned application role For more information, see <a href="#">Using approval roles to find approvers</a> on page 107.
IP - Named (IT) approvers of recipient's cost center	All members of the assigned application role For more information, see <a href="#">Using approval roles to find approvers</a> on page 107.
KA - Product owner and additional owner of the Active Directory Group	Product owner and additional owner of the Active Directory group, if Active Directory groups or group memberships are attested. For more information, see <a href="#">Using requested products to find approvers</a> on page 105.
MS - Manager of the requested business role or organization	Manager and deputy of the business role, department, cost center or location requested by assignment request. For more information, see <a href="#">Using requested roles to find approvers</a> on page 110.
OA - product owner	All members of the assigned application role For more information, see <a href="#">Using requested products to find approvers</a> on page 105.
OC - Exception approver for violated rules	All members of the assigned application role For more information, see <a href="#">Finding exception approvers</a> on page 126.
OH - Exception approver for worst rule violation	All members of the assigned application role For more information, see <a href="#">Finding exception approvers</a> on page 126.
OM - Manager of a specific role	Manager of the role selected in the approval workflow. For more information, see <a href="#">Using specific roles to find approvers</a> on page 105.
OR - Members of a certain role	All employees assigned to a secondary business role. For more information, see <a href="#">Using specific roles to find</a>

Approval procedure name	Responsible approvers
	<a href="#">approvers</a> on page 105.
OT - Attestor of assigned service item	All members of the assigned application role For more information, see <a href="#">Using requested products to find approvers</a> on page 105.
P0 - Manager of shelf's cost center	Manager and deputy manager For more information, see <a href="#">Using IT Shop structures to find approvers</a> on page 103.
P1 - Manager of shop's cost center	Manager and deputy manager For more information, see <a href="#">Using IT Shop structures to find approvers</a> on page 103.
P2 - Manager of shopping center's cost center	Manager and deputy manager For more information, see <a href="#">Using IT Shop structures to find approvers</a> on page 103.
PA - Additional owner of the Active Directory group	All employees to be found through the additional owner of the requested Active Directory group. For more information, see <a href="#">Using requested products to find approvers</a> on page 105.
PG - owners of the requested privileged access request	All employees who can be determined as an owner of the requested privileged access request. For more information, see <a href="#">Using requested products to find approvers</a> on page 105.
PI - Named (IT) approvers of cost center provided in request	All members of the assigned application role For more information, see <a href="#">Using cost centers to find approvers</a> on page 109.
PM - Manager of recipient's cost center	Manager and deputy manager For more information, see <a href="#">Using request recipients to find approvers</a> on page 104.
PP - Manager of cost center provided in request	Manager and deputy manager For more information, see <a href="#">Using cost centers to find approvers</a> on page 109.
PR - Named approvers of cost center provided in request	All members of the assigned application role For more information, see <a href="#">Using cost centers to find approvers</a> on page 109.
RD - Named approvers of cost center provided in request	All members of the assigned application role For more information, see <a href="#">Using approval roles to find</a>

Approval procedure name	Responsible approvers
	<a href="#">approvers</a> on page 107.
RI - Employee's risk index	- For more information, see <a href="#">Request risk analysis</a> on page 122.
RL - Named approvers of recipient's location	All members of the assigned application role For more information, see <a href="#">Using approval roles to find approvers</a> on page 107.
RO - Named approvers of recipient's primary role	All members of the assigned application role For more information, see <a href="#">Using approval roles to find approvers</a> on page 107.
RP - Named approvers of recipient's cost center	All members of the assigned application role For more information, see <a href="#">Using approval roles to find approvers</a> on page 107.
SB - Self-service	- For more information, see <a href="#">Self-service</a> on page 103.
TO - Target system manager of the requested system entitlement	All members of the assigned application role For more information, see <a href="#">Using requested products to find approvers</a> on page 105.
WC - Waiting for further approval	- For more information, see <a href="#">Waiting for further approval</a> on page 111.

## Self-service

Use the SB (self-service) approval procedure to approve requests automatically. You do not have to specify approvers for this approval procedure. A self-service request is always granted immediate approval. Always define an approval workflow with the approval procedure SB as a one-step workflow. That means you cannot set up more approval steps in addition to a self-service approval step.

The approval workflow and the **Self-service** approval policy are available by default and assigned to the **Identity & Access Lifecycle** shop.

## Using IT Shop structures to find approvers

Use the following approval procedures to establish an IT Shop structure owner, an IT Shop structure department manager or an IT Shop structure cost center manager as approver.

**Table 33: Approval procedures for determining approvers for IT Shop structures**

Approval procedure	Approver
The IT Shop structure from which the request comes is assigned an owner or a deputy.	
H0	Owner and deputy of the shelf
H1	Owner and deputy of the shop
H2	Owner and deputy of the shopping center
A department is assigned to the IT Shop structure from which the request is made.	
The department is assigned a manager or a deputy manager.	
D0	Manager and deputy manager of the department's shelf
D1	Manager and deputy manager of the department's shop
D2	Manager and deputy manager of the department's shopping center
A cost center is assigned to the IT Shop structure from which the request is made.	
The cost center is assigned a manager or a deputy manager.	
P0	Manager and deputy manager of the cost center's shelf
P1	Manager and deputy manager of the cost center's shop
P2	Manager and deputy manager of the cost center's shopping center

## Using request recipients to find approvers

Use the following approval procedure if you want to determine the manager of the request recipient to be approver.

**Table 34: Approval procedures for determining approvers for request recipients**

Approval procedure	Approver
The request recipient is assigned a manager.	
CM	Request recipient's manager
The request recipient is assigned to a department.	
The department is assigned a manager or a deputy manager.	
DM	Manager and deputy manager of the request recipient's department.
The request recipient is assigned a cost center.	
The cost center is assigned a manager or a deputy manager.	
PM	Manager and deputy manager of the request recipient's cost center.



## Using specific roles to find approvers

If members of a specific role are to be determined as approvers, use the OR or OM approval procedure. In the approval step, also specify the role to be used to find the approver. The approval procedures determine the following approvers. If a **deputy IT Shop** has been entered in the main data of these employees, they are also authorized as approver.

**Table 35: Approval procedures for determining approvers for a specific role**

Selectable roles	Approver
OM	
Departments (Department)	Manager and deputy manager of the hierarchical role specified in the approval step.
Cost centers (ProfitCenter)	
Locations (Locality)	
Business roles (Org)	
OR	
Departments (Department)	All secondary members of the hierarchical role specified in the approval step.
Cost centers (ProfitCenter)	
Locations (Locality)	
Business roles (Org)	
Application roles (AERole)	

## Using requested products to find approvers

If the owner of the requested product is to be determined as an approver, use the following approval procedures:

### OA - product owner

Assign an application role to the product's service item in the **Product owner** input field to make it possible to find owners of a product as approvers. In this case, all the employees assigned to the application role through secondary assignment are recognized as approvers.

## OT - Attestor of assigned service item

Assign an application role to the product's service item in the **Attestor** field to make it possible to identify the attestors of the requested product as approvers. In this case, all the employees assigned to the application role through secondary assignment are recognized as approvers.

## PA - Additional owner of the Active Directory group

Installed modules: Active Roles Module

If an Active Directory group is requested, the approvers can be found through the additional owner of this Active Directory group. All employees are found that are:

- A member in the assigned Active Directory group through their Active Directory user account
- Linked to the assigned Active Directory user account

**NOTE:** Only use this approval procedure if the **TargetSystem | ADS | ARS\_SSM** configuration parameter is set.

The column **Additional owners** is only available in this case.

## KA - Product owner and additional owner of the Active Directory Group

Installed modules: Active Roles Module

If an Active Directory group is requested, the approvers are found through the product owner of this Active Directory group. If the groups were added automatically to the IT Shop, the account managers are identified as product owners. For more information about these functions, see the *One Identity Manager Administration Guide for One Identity Active Roles Integration*.

**NOTE:** If the **TargetSystem | ADS | ARS\_SSM** configuration parameter is set, additional owners of the Active Directory group are also determined.

The column **Additional owners** is only available in this case.

## PG - owners of the requested privileged access request

Installed modules: Privileged Account Governance Module

If an access request is made for a privileged object within a Privileged Account Management system, such as PAM assets, PAM asset accounts and PAM directory accounts, then the owner of the privileged objects is determined as the approver in the approval process for these. The owners of the privileged objects must have the **Privileged Account Governance | Asset and account owners** application role or a child application role.

To make an access request, additional system prerequisites must be met by the Privileged Account Management system. For more information about PAM access requests, see the *One Identity Manager Administration Guide for Privileged Account Governance*.

## TO - target system manager of the requested system entitlement

Installed modules: Target System Base Module  
Other target system modules

If a system entitlement is requested, the target system managers can be found as approvers using this approval procedure. Assign the synchronization base object of the target system to the target system manager (for example Active Directory domain, SAP client, target system type in the Unified Namespace). This finds, as approvers, all employees assigned to the application role assigned here and all members of the parent application roles.

This finds all target system managers of the system entitlement that are stored as the final product with the request (PersonWantsOrg.UID\_ITShopOrgFinal column).

## Using approval roles to find approvers

Use the following approval procedure if you want to establish the approver of a hierarchical role to be approver.

**Table 36: Approval procedures to determine approvers through an approval role**


Approval procedure	Approver
RD	The request recipient is assigned a primary department. The department is assigned an application role in the <b>Role approver</b> menu. All secondarily assigned employees of this application role are determined to be approvers.
RL	The request recipient is assigned a primary location. The location is assigned an application role in the <b>Role approver</b> menu. All secondarily assigned employees of this application role are determined to be approvers.
RO	Installed modules: Business Roles Module The request recipient is assigned a primary business role. The business role is assigned an application role in the <b>Role approver</b> menu. All secondarily assigned employees of this application role are determined to be approvers.
RP	The request recipient is assigned a primary cost center. The cost center is

## Approval procedure Approver

assigned an application role in the **Role approver** menu.

All secondarily assigned employees of this application role are determined to be approvers.

**Figure 6: Determining approvers through a department's role approver**

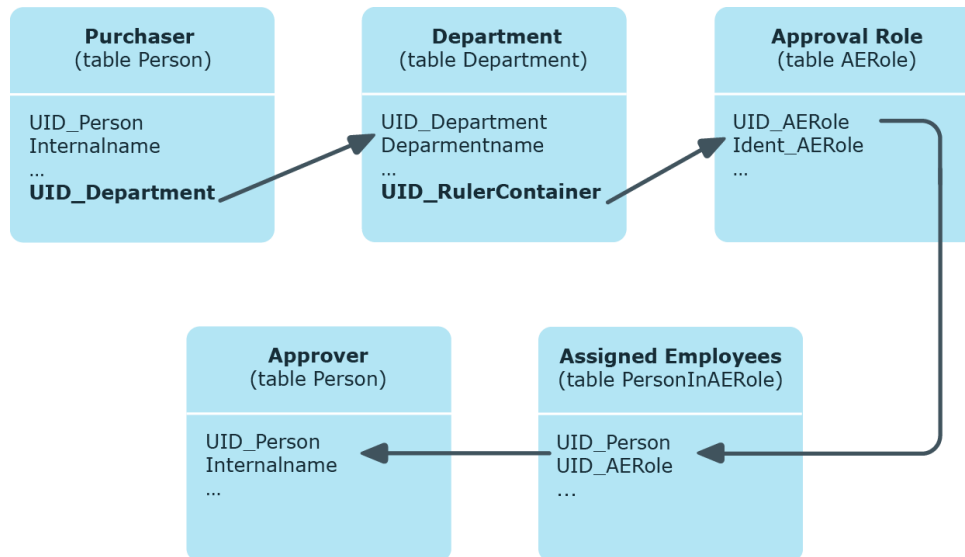

## Approval procedure Approver

- |    |   |
|----|---|
| ID | <p>The request recipient is assigned a primary department. The department is assigned an application role in the <b>Role approver (IT)</b> menu.</p> <p>All secondarily assigned employees of this application role are determined to be approvers.</p>   |
| IL | <p>The request recipient is assigned a primary location. The location is assigned an application role in the <b>Role approver (IT)</b> menu.</p> <p>All secondarily assigned employees of this application role are determined to be approvers.</p>   |
| IO | <p>Installed modules: Business Roles Module</p> <p>The request recipient is assigned a primary business role. The business role is assigned an application role in the <b>Role approver (IT)</b> menu.</p> <p>All secondarily assigned employees of this application role are determined to be approvers.</p> |
| IP | <p>The request recipient is assigned a primary cost center. The cost center is assigned an application role in the <b>Role approver (IT)</b> menu.</p>  |

Approval procedure	Approver
--------------------	----------

	All secondarily assigned employees of this application role are determined to be approvers.
--	---

Determining the approver using the example of an approval role for the request's recipient primary department (approval procedure RD):

1. Determine the requester's primary department (UID\_Department).
2. The application role (UID\_AERole) is determined through the department's role approver (UID\_RulerContainer).
3. Determine the secondary employees assigned to this application role. These can issue approval.
4. If there is no approval role given for the primary department or the approval role does not have any members, the approval role is determined for the parent department.
5. The request cannot be approved if no approval role with members is found by drilling up to the top department.

**NOTE:** When approvers are found using the approval procedures RO or IO, and inheritance for business roles is defined from the bottom up, note the following:

If no role approver is given for the primary business role, the role approver is determined from the child business role.

## Using cost centers to find approvers

Use the following procedure to determine the approver through a cost center given in the request.

**Table 37: Approval procedures for determining approvers for a cost center**

Approval procedure	Approver
PP	A cost center is entered in the request. The cost center is assigned a manager. The manager of the given cost center is established as approver.
PR	A cost center is entered in the request. The cost center is assigned an application role in the <b>Role approver</b> menu. All secondarily assigned employees of this application role are determined to be approvers. Approvers are determined following the same method as described in <a href="#">Using approval roles to find approvers</a> .

Approval procedure	Approver
PI	<p>A cost center is entered in the request. The cost center is assigned an application role in the <b>Role approver (IT)</b> menu.</p> <p>All secondarily assigned employees of this application role are determined to be approvers.</p> <p>Approvers are determined following the same method as described in <a href="#">Using approval roles to find approvers</a>.</p>

## Using departments to find approvers

Use the following procedure to determine the approver through a department given in the request.

**Table 38: Approval procedures for determining approvers for a department**

Approval procedure	Approver
DP	<p>A department is entered in the request. The department is assigned a manager.</p> <p>The manager of the given department is established as approver.</p>
DR	<p>A department is entered in the request. The department is assigned an application role in the <b>Role approver</b> menu.</p> <p>All secondarily assigned employees of this application role are determined to be approvers.</p> <p>Approvers are determined following the same method as described in <a href="#">Using approval roles to find approvers</a>.</p>
DI	<p>A department is entered in the request. The department is assigned an application role in the <b>Role approver (IT)</b> menu.</p> <p>All secondarily assigned employees of this application role are determined to be approvers.</p> <p>Approvers are determined following the same method as described in <a href="#">Using approval roles to find approvers</a>.</p>

## Using requested roles to find approvers

If membership in or assignment to a hierarchical role is requested and the manager of the requested role is to be the approver, use the MS approval procedure. Then the manager and deputy of the requested department, cost center, business role or location are

determined as the approvers. This approval procedure can only be used for assignment requests.

## Waiting for further approval

**NOTE:** Only one approval step can be defined with the WC approval procedure per approval level.

Use the WC approval procedure within an approval process to ensure that a defined prerequisite is fulfilled before the request is approved. Therefore, the approval of a permissions group request should only take place if the corresponding user account exists. Deferred approval is useful when a request should be tested for rule conformity. If the user account does not exist when the requested permissions groups are tested, any rule violations that may occur due to the request will not be logged.

You can specify which prerequisites have to be fulfilled so that a request can be presented for approval by defining an appropriate condition. The condition is evaluated as a function call. The function must accept the request UID as a parameter (PersonWantsOrg.UID\_PersonWantsOrg). It must define three return values as integer values. One of the following actions is carried out depending on the function's return value.

**Table 39: Return value for deferred approval**

Return value	Action
Return value > 0	The condition is fulfilled. Deferred approval has completed successfully. The next approval step (in case of success) is carried out.
Return value = 0	The condition is not yet fulfilled. Approval is rolled back and is retested the next time DBQueue Processor runs.
Return value < 0	The condition is not fulfilled. Deferred approval has failed. The next approval step (in case of failure) is carried out.

### To use an approval procedure

1. Create a database function which tests the condition for the request.
2. Create an approval step with the WC approval procedure. Enter the function call in **Condition**.  
Syntax: `dbo.<function name>`
3. Specify an approval step in the case of success. Use an approval procedure with which One Identity Manager can determine the approvers.
4. Specify an approval step in the case of failure.

### Example

To check whether the necessary user account exists when the permissions group is requested, you can use the `TSB_FGIPW0DecisionForGroup` function that is supplied.

**Table 40: Example of an approval step with deferred approval**

Single step:	Waiting Condition
Approval procedures:	WC - Waiting for further approval
Condition:	dbo.TSB_FGIPWODecisionForGroup
Number of approvers:	1

**Table 41: Return value for deferred approval decisions in the TSB\_FGIPWODecisionForGroup function**

Return value	Action
Return value > 0	The user account exists, thus fulfilling the condition. The delayed approval is decided positively. The request is passed onto the next approval step. Now an approval step must follow which can establish the approvers for the request.
Return value = 0	The condition is not fulfilled. There is a request pending for a user account or the employee has an account definition with which a user account could be created. Approval is, therefore, deferred, and tested again on the next DBQueue Processor run.
Return value < 0	The condition is not fulfilled. There is no request for a user account and the employee does not have an account definition with which a user account could be created. The delayed approval is decided negatively. The request is passed onto the next approval step.

## Calculated approval

**NOTE:** Only one approval step can be defined with the CD approval procedure per approval level.

It is possible to determine who should be presented with the request for approval on the basis of a defined condition. For example, if the price of the request is below a defined limit, then the department manager can grant approval. If this limit is exceeded, the request has to be presented to the cost center manager. In another case, requests from members of department "XY" can be granted immediate approval as long as the request does not exceed the defined price limit. If the limit is exceeded or if the employee belongs to another department, the approval has to be granted by the department manager.

If approval should be calculated (CD approval procedure), enter a condition when you set up the approval step. If the condition returns a result, the approval step is approved through One Identity Manager. If the condition does not return a result, the approval step is denied by One Identity Manager. If there are no subsequent steps to be carried out, the request is finally granted or denied approval. The condition is defined as a valid where clause for database queries. You can enter the SQL query directly or with a wizard. The condition is always checked for the current request and requester.




## Example for calculated approval

Requests with a price of under 1000 euros can be approved by the customer's department manager. Requests over 1000 euros must be presented to the cost center manager.

**Table 42: Approval step with calculated approval**

Single step:	Calculated approval
Approval procedures:	CD - Calculated approval
Condition:	<pre>EXISTS ( SELECT 1 FROM (SELECT UID_ITShopOrg FROM ITShopOrg WHERE EXISTS ( SELECT 1 FROM (SELECT UID_AccProduct FROM AccProduct WHERE round(PurchasePrice, 13) &lt; round(1.000000E+003, 13)) as X WHERE X.UID_AccProduct = ITShopOrg.UID_AccProduct ) ) as X WHERE X.UID_ITShopOrg = PersonWantsOrg.UID_Org )</pre>
Number of approvers:	1

**Figure 7: Approval workflow showing calculated approval**

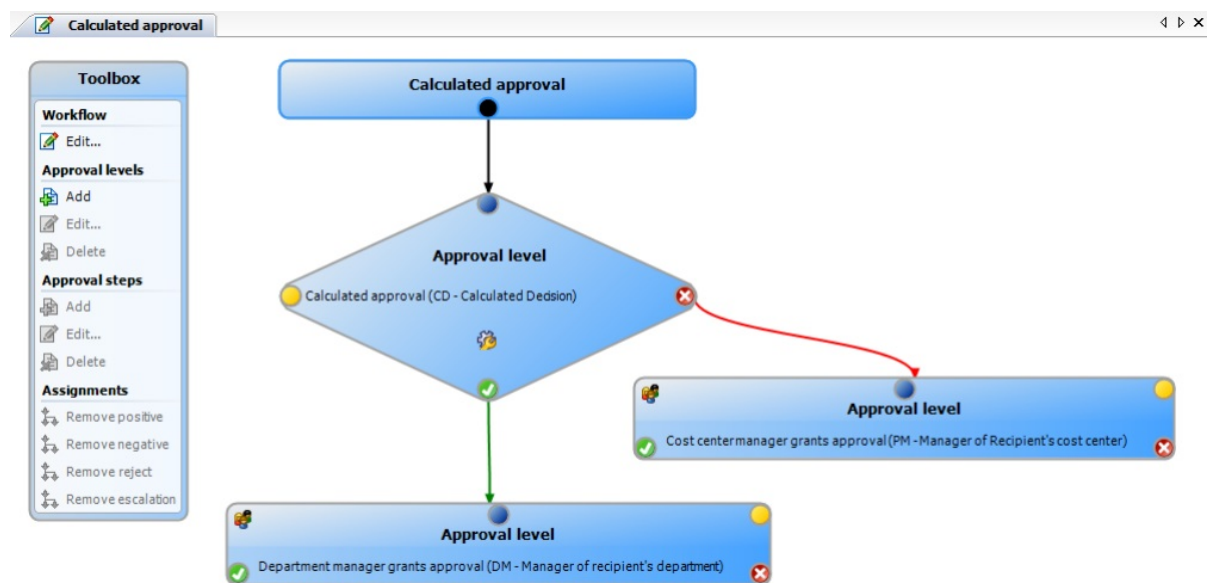

## Approvals to be made externally

Use external approvals (EX approval procedure) if a request needs to be approved once a defined event from outside One Identity Manager takes place. You can also use this procedure to allow users with no access to One Identity Manager to approve requests.

Specify an event in the approval step that triggers an external approval. The event triggers a process that initiates the external approval for the request and evaluates the result of the approval decision. The approval process waits for the external decision to be passed to One Identity Manager. Define the subsequent approval steps depending on the result of the external approval.

### ***To use an approval procedure***

1. Define your own processes that:
  - Triggers an external approval.
  - Analyzes the results of the external approval.
  - Grants or denies approval in the subsequent external approval step in One Identity Manager.
2. Defines an event that starts the process for external approval. Enter the result in **Result** in the approval step.

If the external event occurs, the approval step status in One Identity Manager must be changed. Use the `CallMethod` process task with the `MakeDecision` method for this. Pass the following parameters to the process task:

MethodName: Value = "MakeDecision"

ObjectType: Value = "PersonWantsOrg"

Param1: Value = "sa"

Param2: Value = <approval> ("true" = granted; "false" = denied)

Param3: Value = <reason for approval decision>

Param4: Value = <standard reason>

Param5: Value = <number approval steps> (PWODecisionStep.SubLevelNumber)

WhereClause: Value = "UID\_PersonWantsOrg = '" & \$UID\_PersonWantsOrg\$ & "'"

Use these parameters to specify which request is to be approved by external approval (WhereClause). Param1 specifies the approver. The approver is always the **sa** system user. Param2 passes down the approval decision. If the request was granted, a value of **True** must be returned. If the request was denied, a value of **False** must be returned. Use Param3 to pass a reason text for the approval decision; use Param4 to pass a predefined standard reason. If more than one external approval steps have been defined in an approval level, use Param5 to pass the approval step count. This ensures the approval is aligned with the correct approval step.

Use the Process Editor to define and edit processes.

### **Example**

All approved requests should be entered into an external ticketing system and started. If a request is completed in an external ticketing system, it must also be completed in One Identity Manager. Use this approval procedure to make external approvals and define:

- A P1 process that creates a ticket with the information about the requested product in the external system and passes the ticket number to One Identity Manager in the request instance.
- An E1 event that starts the P1 event.
- A P2 process that checks whether the ticket status is "closed" and calls the `CallMethod` process task with the `MakeDecision` method in One Identity Manager.
- An E2 event that starts the P2 process.
- A schedule that starts the E2 event on a regular basis.

Enter E1 in the **Event** box as the trigger for the external decision.

Pass the product and customer data that the product is being requested for in the P1 process to the external ticket system. In another parameter, pass the ticket number from the external ticketing system to One Identity Manager.

Use the ticket number to check the ticket status in P2 process. If the ticket is closed, call the `MakeDecision` method and pass the ticket status from the external system to One Identity Manager in a parameter (Param2). In another parameter, specify the system user that changes the approval step status in One Identity Manager (Param1). Pass **sa** as the value for this parameter. Pass the reason for the approval decision in Param3.

For more information about defining processes, see *One Identity Manager Configuration Guide*.

### Detailed information about this topic

- [Properties of an approval step](#) on page 89

## Finding requesters


Use the BS and BR approval procedures to return the approval to the requester or request recipient. The BS approval procedure finds the request requester and the BR approval procedure finds the request recipient. As a result, the requester and the request recipient can also influence the approval. Their approval can be viewed in the approval history. The approval workflow can be continued from any approval level.

The requesters are also found if the **QER | ITShop | PersonInsertedNoDecide** and **QER | ITShop | PersonOrderedNoDecide** configuration parameters are set. For more information, see [Approving requests from an approver](#) on page 132.

## Setting up approval procedures

You can create your own approval procedures if the default approval procedures for finding the responsible approvers do not meet your requirements. The condition through which the approvers are determined is formulated as a database query. Several queries may be combined into one condition.

### ***To set up an approval procedure***

1. In the Manager, select the **IT Shop > Basic configuration data > Approval procedures** category.
2. Select an approval procedure in the result list and run the **Change main data** task.  
- OR -  
Click  in the result list.
3. Edit the approval procedure main data.
4. Save the changes.

### ***To edit the condition***

1. In the Manager, select the **IT Shop > Basic configuration data > Approval procedures** category.
2. Select an approval procedure from the result list.
3. Select **Change queries for approver selection**.

### **Detailed information about this topic**

- [General main data of an approval procedure](#) on page 116
- [Queries for approver selection](#) on page 117

## **General main data of an approval procedure**

Enter the following main data of an approval procedure.

**Table 43: General main data of an approval procedure**

<b>Property</b>	<b>Description</b>
Approval procedure	Descriptor for the approval procedure (maximum two characters).
Description	Approval procedure identifier.
DBQueue Processor task	Approvals can either be made automatically through a DBQueue Processor calculation task or by specified approvers. Assign a custom DBQueue Processor task if the approval procedure should make an automatic approval decision.  You cannot assign a DBQueue Processor task if a query is entered for determining the approvers.
Max. number approvers	Maximum number of approvers to be determined by the approval procedure. Specify how many employees must really make approval decisions in the approval steps used by this approval procedure.

Property	Description
Sort order	Value for sorting approval procedures in the menu. Specify the value 10 to display this approval procedure at the top of the menu when you set up an approval step.

## Related topics

- [Properties of an approval step](#) on page 89

## Queries for approver selection

The condition through which the approvers are determined is formulated as a database query. Several queries may be combined into one condition. This adds all employees determined by single queries to the group of approvers.

### *To edit the condition*

1. In the Manager, select the **IT Shop > Basic configuration data > Approval procedures** category.
2. Select an approval procedure from the result list.
3. Select **Change queries for approver selection**.

### *To create single queries*

1. Click **Add**.  
This inserts a new row in the table.
2. Mark this row. Enter the query properties.
3. Add more queries if required.
4. Save the changes.

### *To edit a single query*

1. Select the query you want to edit in the table. Edit the query's properties.
2. Save the changes.

### *To remove single queries*

1. Select the query you want to remove in the table.
2. Click **Delete**.
3. Save the changes.

**Table 44: Query properties**

Property	Description
Approver selection	Query identifier that determines the approvers.
Query	<p>Database query for determining the approvers.</p> <p>The database query must be formulated as a select statement. The column selected by the database query must return a UID_Person. Every query must return a value for UID_PWORulerOrigin. The query returns one or more employees to whom the request is presented for approval. If the query fails to a result, the request is canceled.</p> <p>A query contains exactly one select statement. To combine several select statements, create several queries.</p> <p>If a DBQueue Processor task is assigned, you cannot enter a query to determine approvers.</p>

You can, for example, determine predefined approvers with the query (example 1). The approver can also be found dynamically depending on the request to approve. To do this, access the request to be approved within the database query using the @UID\_PersonWantsOrg variable (example 2).

### Example 1

Requests should be approved by a specific approver.

Query: `select UID_Person, null as UID_PWORulerOrigin from Person where InternalName='Bloggs, Jan'`

### Example 2

Approval for requests should be granted or denied through the requester's parent department. The approver is the cost center manager that is assigned to the requester's primary department. The requester is the employee that started the request (UID\_PersonInserted, for example, when placing requests for employees).

Query: `select pc.UID_PersonHead as UID_Person, null as UID_PWORulerOrigin from PersonWantsOrg pwo  
join Person p on pwo.UID_PersonInserted = p.UID_Person  
join Department d on p.UID_Department = d.UID_Department  
join ProfitCenter pc on d.UID_ProfitCenter = pc.UID_ProfitCenter  
where pwo.UID_PersonWantsOrg = @UID_PersonWantsOrg`

## Taking delegation into account

To include delegation when determining approvers, use the query to also determine the employees to whom a responsibility has been delegated. If the managers of hierarchical roles are to make the approval decision, determine the approvers from the `HelperHeadOrg` table. This table groups all hierarchical role managers, their deputy managers, and employees to whom a responsibility has been delegated. If the members of business or application roles are to make the approval decision, determine the approvers from the `PersonInBaseTree` table. This table groups all hierarchical role members and employees to whom a responsibility has been delegated.

Determine the `UID_PWORulerOrigin` in order to notify delegators when the recipient of the delegation has made a decision on a request and thus allow the Web Portal to show if the approver was originally delegated.

### *To determine the `UID_PWORulerOrigin` of the delegation*

- Determine the `UID_PersonWantsOrg` of the delegation and copy this value as `UID_PWORulerOrigin` to the query. Use the `dbo.QER_FGIPWORulerOrigin` table function to do this.

```
select dbo.QER_FGIPWORulerOrigin(XObjectKey) as UID_PWORulerOrigin
```

Modified query from example 2:

```
select hho.UID_PersonHead as UID_Person, dbo.QER_FGIPWORulerOrigin
(hho.XObjectkey) as UID_PWORulerOrigin from PersonWantsOrg pwo
    join Person p on pwo.UID_PersonInserted = p.UID_Person
    join Department d on p.UID_Department = d.UID_Department
    join ProfitCenter pc on d.UID_ProfitCenter = pc.UID_ProfitCenter
    join HelperHeadOrg hho on hho.UID_Org = pc.UID_ProfitCenter
where pwo.UID_PersonWantsOrg = @UID_PersonWantsOrg
```

## Copying an approval procedure

You can copy default approval procedures in order to customize them.

### *To copy an approval procedure*


1. In the Manager, select the **IT Shop > Basic configuration data > Approval procedures** category.
2. Select an approval procedure in the result list. Select the **Change main data** task.
3. Select the **Create copy** task.
4. Confirm the security prompt with **Yes**.
5. Enter the short name for the copy.

The short name for an approval procedure consists of a maximum of two characters.

6. Click **OK** to start copying.  
- OR -  
Click **Cancel** to cancel copying.

## Deleting approval procedures

### *To delete an approval procedure*

1. Remove all assignments to approval steps.
  - a. On the approval procedure overview form, check which approval steps are assigned to the approval procedure.
  - b. Switch to the approval workflow and assign another approval procedure to the approval step.
2. In the Manager, select the **IT Shop > Basic configuration data > Custom defined > Approval procedures** category.
3. Select an approval procedure from the result list.
4. Click .
5. Confirm the security prompt with **Yes**.

## Determining the responsible approvers

The DBQueue Processor calculates which employee is authorized as an approver and in which approval level. Once a request is triggered, the approvers are determined for every approval step of the approval workflow to be processed. Changes to responsibilities may lead to an employee no longer being authorized as an approver for a request that is not yet finally approved. In this case, approvers must be recalculated. The following changes can trigger a recalculation for as yet unapproved requests:

- Approval policy, workflow, step, or procedure changes.
- An authorized approver loses their responsibility in One Identity Manager, for example, if a change is made to the department manager, product owner, or target system manager.
- An employee obtains responsibilities in One Identity Manager and therefore is authorized as an approver, for example as the manager of the request recipient.
- An employee authorized as an approver is deactivated.

Once an employee's responsibilities have changed in One Identity Manager, an approver recalculation task is queued in the DBQueue. By default, all approval steps of the pending approval processes are recalculated at the same time. Approval steps that have already been approved remain approved, even if their approver has changed. Recalculating approvers may take a long time depending on the configuration of the system environment



and the amount of data to be processed. To optimize this processing time, you can specify the approval steps for which the approvers are to be recalculated.

### **To configure recalculation of approvers**

- In the Designer, set the **QER | ITShop | ReducedApproverCalculation** configuration parameter and select one of the following options as the value.

**Table 45: Options for recalculating approvers**

Option	Description
No	<p>All approval steps are recalculated. This behavior also applies if the configuration parameter is not set.</p> <p>Advantage: All valid approvers are displayed in the approval process. The rest of the approval sequence is transparent.</p> <p>Disadvantage: Recalculating approvers may take a long time.</p>
CurrentLevel	<p>Only approvers for the approval level that is currently to be edited are recalculated. Once an approval level has been approved, the approvers are determined for the next approval level.</p> <p>Advantage: The number of approval levels to calculate is lower. Calculating the approvers may be faster.</p> <p><b>TIP:</b> Use this option if performance problems occur in your environment in connection with the recalculation of approvers.</p> <p>Disadvantage: The originally calculated approvers are still displayed in the approval sequence for each subsequent approval step, even though they may no longer have approval authorization. The rest of the approval sequence is not correctly represented.</p>
NoRecalc	<p>No recalculation of approvers The previous approvers remain authorized to approve the current approval levels. Once an approval level has been approved, the approvers are determined for the next approval level.</p> <p>Advantage: The number of approval levels to calculate is lower. Calculating the approvers may be faster.</p> <p><b>TIP:</b> Use this option if performance problems occur in your environment in connection with the recalculation of approvers, even though the <b>CurrentLevel</b> option is used.</p> <p>Disadvantage: The originally calculated approvers are still displayed in the approval sequence for each subsequent approval step, even though they may no longer have approval authorization. The rest of the approval sequence is not correctly represented. Employees that are no longer authorized can approve the current approval level.</p> <p>In the worst-case scenario, the only attestors originally calculated here now have no access to One Identity Manager, for example,</p>

Option	Description
	<p>because they have left the company. The approval level cannot be approved.</p> <p><b>To see approval steps of this type through</b></p> <ul style="list-style-type: none"> <li>• Define a timeout and timeout behavior when you set up the approval workflows on the approval steps.</li> <li>- OR -</li> <li>• When setting up the IT Shop, assign members to the chief approval team. These can access open approval processes at any time.</li> </ul>

### Detailed information about this topic

- [Properties of an approval step](#) on page 89
- [Chief approval team](#) on page 195

### Related topics

- [Changing approval workflows of pending requests](#) on page 163

## Request risk analysis

Everyone with IT system authorization in a company represents a security risk for that company. For example, a person with permission to edit financial data in SAP carries a higher risk than an employee with permission to edit their own personal data. To quantify the risk, you can enter a risk value for every company resource in One Identity Manager. A risk index is calculated from this value for every person who is assigned this company resource, directly, or indirectly. Company resources include target system entitlements (for example, Active Directory groups or SAP profiles), system roles, subscribable reports, software, and resources. In this way, all the people that represent a particular risk to the company can be found.

Every time a company resource with a specified risk index is assigned, the employee's risk index may exceed a permitted level. You can check the risk index of company resources if they are requested through the IT Shop. If the risk index is higher than the specified value, the request is denied.

## To set up risk assessment for requests

- Create an approval workflow.
  1. Add an approval step with the RI approval procedure.
  2. In the **Condition** field, enter the comparison value for the risk index. Enter a number in the range **0.0 to 1.0**.
  3. Enter other approval levels if required.

The approval step is granted approval by One Identity Manager if the risk index of the requested company resource is lower than the comparison value. If the risk index is higher or equal to the comparison value, the approval step is not granted approval.

Risk assessment of requests works for both direct company resource request and assignment requests. Only risk indexes with inputted values are examined for the approval decision; calculated risk indexes are not taken into account. Therefore, risk assessment of requests only works if the product's original table or one of the member tables of a requested assignment has a RiskIndex column. If the table only has the RiskIndexCalculated column, the request is automatically approved. If both member tables of an assignment request have a RiskIndex column, the highest of the two risk indexes is used as the basis for the approval.

If the company resource request or an assignment has been granted approval, the employee's risk index is recalculated the next time the scheduled calculation task is run.

For more information about risk assessment, see the *One Identity Manager Risk Assessment Administration Guide*.

## Related topics

- [Properties of an approval step](#) on page 89

# Testing requests for rule compliance

Installed modules: Compliance Rules Module

You can integrate rule conformity testing for IT Shop requests within an approval workflow. A separate approval procedure is supplied for this. This approval procedure checks whether the request's recipient will violate compliance rules if the requests are granted approval. The result of the test is logged in the request's approval sequence and approval history.

**Table 46: Approval procedures for compliance checking**

Approval procedure	Description
CR - compliance check (simplified)	Checks the current request for possible rule violations. It takes into account the requested product and all the company resources already assigned to the request recipient.

### **Prerequisites for request validation**

- Compliance rules are defined.  
For detailed information, see the *One Identity Manager Compliance Rules Administration Guide*.
- The approval workflow contains an approval step with the CR approval procedure.  
For more information, see [Compliance checking requests](#) on page 124.

## **Compliance checking requests**

To retain an overview of potential rule violations, you can run a simplified compliance check. Use the CR approval procedure to test requests for possible rule violations before finally approving them.

The following data of a recipient's request is taken into account by the compliance check:

- All pending requests
- All company resources already assigned to the recipient
- All the recipient's user accounts
- All entitlement in the target system (for example, Active Directory groups or SAP roles) the recipient has obtained through these user accounts

Auxiliary tables for object assignments are regularly evaluated for the compliance check. Auxiliary tables are calculated on a scheduled basis. Furthermore, the approval procedure only takes into account compliance rules that are created using the simplified definition.

Rule checking does not completely check the requests with this. It is possible that under the following conditions, rule checking does not identify a rule violation:

- Customer permissions change after the auxiliary table have been calculated.
- If memberships are requested in business role or organization, a rule is violated by an object that is inherited through the business role or organization. Inheritance is calculated after request approval and can therefore not be identified until after the auxiliary table is calculated again.
- The customer does not belong to the rule's employee group affected until the request is made.
- The rule condition was created in expert node or as a SQL query.

**TIP:** A complete check of assignments is achieved with cyclical testing of compliance rule using schedules. This finds all the rule violations that result from the request.

It is possible that under the following conditions, rule checking identifies a rule violation where one does not exist:

- Two products violate one rule when they are assigned at the same time. The product requests are, however, for a limited period. The validity periods does not overlap. Still a potential rule violation is identified.

**TIP:** These requests can be approved after checking by exception approver as permitted by the definition of the violation rule.

The compliance check is not only useful for specifying which rule is violated by a request, but it can also find out which product in the request caused the rule violation. This makes a detailed analysis possible of the rule violation. The request can still be approved by exception approval, the definition of compliance rules permitting. Additional approval steps are added in approval workflows to deal with exception approval.

### **Conditions for compliance checking requests**

- You can add only one approval step per approval policy with the CR approval procedure.
- The rule conditions were created in the simple definition.
- IT Shop properties that are specified for each rule are taken into account in the rule testing. Identification of a rule violation depends on the setting on **Rule violation identified**.
- The compliance check should be added as the last approval level in the approval workflow. The subsequent approval levels only get one approval step to determine the exception approver if approval is denied.

### **Compliance check sequence**

1. If an approval step for compliance checking using the CR approval procedure is found in the request's approval procedure, all products in pending requests are assigned to the customer. It is assumed that all pending requests will be approved and therefore the customer will obtain all the products. The current request is then analyzed with respect to potential violations against the defined rules.
2. If no rule violations are found, the approval step is automatically granted approval and the request is passed on to the approver at the next approval level above.
3. If a rule violation is detected, the request is automatically not granted approval. The request can still be approved by exception approval, the definition of rule violations permitting.

For more information about compliance checking, see the *One Identity Manager Compliance Rules Administration Guide*.

### **Detailed information about this topic**

- [Identifying rule violations](#) on page 125
- [Finding exception approvers](#) on page 126

## **Identifying rule violations**

If the **QER | ComplianceCheck | EnableITSettingsForRule** configuration parameter is set, properties can be added to compliance rules that are taken into account when rule

checking requests.

Specify which violation should be logged for the rule by using the **Rule violation identified** IT Shop property.

**Table 47: Permitted values**

Value	Description
New rule violation due to a request	Only rule violations that are added through approval of the current request are logged.
Unapproved exception	Rule violations that are added through approval of the current request are logged. Already known rule violations that have not yet been granted an exception are also logged.
Any compliance violation	All rule violations are logged, independent of whether an exception approval has already been granted or not. This value is automatically set when the <b>Explicit exception approval</b> option is set.

If the **QER | ComplianceCheck | EnableITSettingsForRule** configuration parameter is not set, new rule violations are logged through the current request.

For detailed information, see the *One Identity Manager Compliance Rules Administration Guide*.

## Finding exception approvers

Requests that may cause a rule violation can still be approved by exception approval.

### **To allow exception approval for request with rule violations**

1. Enable the **Exception approval allowed** option for the compliance rule and assign an exception approver.

For more information, see the *One Identity Manager Compliance Rules Administration Guide*.

2. Enter an approval step in the approval workflow with the OC or OH procedure. Connect this approval level with the compliance checking approval level at the connection point for denying this approval decision.

#### NOTE:

- Only apply this approval procedure immediately after an approval level with the CR approval procedure.
- For each approval workflow, **only one** approval step can be defined using the OC or OH approval procedure.

3. If the **QER | ComplianceCheck | EnableITSettingsForRule** configuration parameter is set, you can use the rule's IT Shop properties to configure which rule violations are presented to an exception approver. Set or unset **Explicit exception approval** to do this.

For more information, see [Explicit exception approval](#) on page 131.

**Table 48: Approval procedures for exception approval**

Approval procedure	Description
OC (Exception approvers for violated rules)	The approval decision is agreed on by the exception approvers of the violated rule. As it may be possible that several rule are broken with one request, the request is presented to all the exception approvers in parallel. If one of the exception approvers rejects the exception, the request is rejected.
OH (exception approver for worst rule violation)	<p>The approval decision is agreed on by the rule's exception approver which poses the highest threat. In this way, you can accelerate the exception approval procedure for a request that violates several rules.</p> <p>Ensure the following apply for this approval procedure:</p> <ul style="list-style-type: none"><li>• The severity level is set in the assessment criteria for all compliance rules.</li><li>• The exception approver for the worst rule violation in all affected rules is one of the exception approvers.</li></ul>


### Example

Four different compliance rules are violated by a request for Active Directory group membership. The target system manager of the Active Directory domain is entered as exception approver for all the compliance rules.

Using the OC approval procedure, the target system manger must grant approval exceptions for all four compliance rules.

Using the OH approval procedure, the target system manager is presented with the request only for the compliance rule with the highest severity code. The manager's decision is automatically passed on to the other violated rules.

**Figure 8: Example of an approval workflow with compliance checking and exception approval**

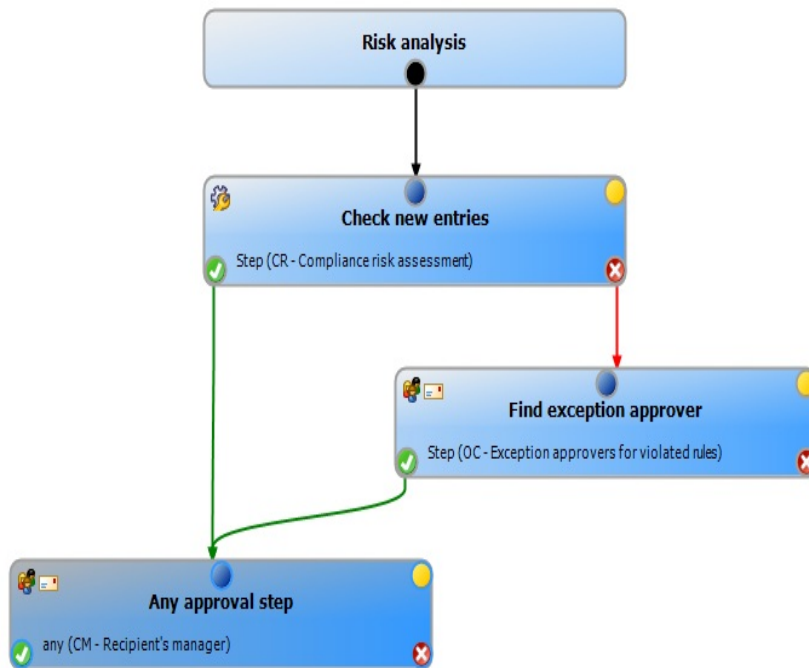

### ***Sequence of compliance checking with exception approval***

1. If a rule violation is detected during compliance checking, the request is automatically not granted approval. The request is passed on to the approver of the next approval level for approval.
2. Exception approvers are found according to the given approval procedure.
3. If exception approval is granted, the request is approved and assigned.
4. If exception approval is not granted, the request is denied.

**IMPORTANT:** If the **QER | ITShop | ReuseDecision** configuration parameter is set and the exception approver has already approved as the request an approver in a previous approval step, exception approval is automatically granted. For more information, see [Automatically approving requests](#) on page 134.

#### **NOTE:**

- As opposed to the manager/deputy principle normally in place, an exception approver's deputy is NOT permitted to grant exception approval alone.
- You cannot determine fallback approvers for exception approvers. The request is canceled if no exception approver can be established.
- The chief approval team cannot grant exception approvals.



# Restricting exception approvers

By default, exception approvers can also make approval decisions about requests in which they are themselves requester (UID\_PersonInserted) or recipient (UID\_PersonOrdered). To prevent this, you can specify the desired behavior in the following configuration parameter and in the approval step:

- **QER | ComplianceCheck | DisableSelfExceptionGranting** configuration parameter
- **QER | ITShop | PersonOrderedNoDecideCompliance** configuration parameter
- **QER | ITShop | PersonInsertedNoDecideCompliance** configuration parameter
- **Approval by affected employee** option in the approval step for finding exception approvers

If the requester or approver is not allowed to grant approval exceptions, their main identity and all sub identities are removed from the circle of exception approvers.

## Summary of configuration options

Requesters can grant exception approval for their own requests, if:

- **PersonInsertedNoDecideCompliance** configuration parameter is not set.  
- OR -
- **Approval by affected employee** option is set.

Recipients can grant exception approval for their own requests, if:

- **DisableSelfExceptionGranting** configuration parameter is not set.  
**PersonOrderedNoDecideCompliance** configuration parameter is not set.  
- OR -
- **DisableSelfExceptionGranting** configuration parameter is not set.  
**Approval by affected employee** option is set.

Requesters cannot grant exception approval, if:

- **PersonInsertedNoDecideCompliance** configuration parameter is set.  
**Approval by affected employee** option is not set.

Recipients cannot grant exception approval, if:

- **DisableSelfExceptionGranting** configuration parameter is set.  
- OR -
- **PersonOrderedNoDecideCompliance** configuration parameter is set.  
**Approval by affected employee** option is not set.

## Related topics

- [Setting up exception approver restrictions](#) on page 130
- [Approving requests from an approver](#) on page 132

# Setting up exception approver restrictions

## *To prevent recipients of request becoming exception approvers*

- In the Designer, disable the **QER | ComplianceCheck | DisableSelfExceptionGranting** configuration parameter.

This configuration parameter takes effect:

- When requests are granted approval exception.
- During cyclical rule checking. For more information about cyclical rule checking, see the *One Identity Manager Compliance Rules Administration Guide*.

- OR -

- In the Designer, enable the **QER | ITShop | PersonOrderedNoDecideCompliance** configuration parameter.

This configuration parameter takes effect:

- When requests are granted approval exception.
- If the **Approval by affected employee** option is disabled in the approval step.

## *To prevent requesters becoming exception approvers*

- In the Designer, set the **QER | ITShop | PersonInsertedNoDecideCompliance** configuration parameter.

This configuration parameter takes effect:

- When requests are granted approval exception.
- If the **Approval by affected employee** option is disabled in the approval step.

For individual approval workflows, you can allow exceptions to the general rule in the **PersonInsertedNoDecide** and **PersonOrderedNoDecide** configuration parameters. Use these options if the requester or recipient of requests is allowed to grant themselves exception approval only for certain requests.

## *To allow request recipients or requesters to become exception approvers in certain cases*

- In the approval step for determining exception approvers, enable the **Approval by affected employee** option.

## Related topics

- [Properties of an approval step](#) on page 89
- [Approving requests from an approver](#) on page 132
- [Restricting exception approvers](#) on page 129

## Explicit exception approval

If the **QER | ComplianceCheck | EnableITSettingsForRule** configuration parameter is set, properties can be added to compliance rules that are taken into account when rule checking requests.

Use the **Explicit exception approval** IT Shop property to specify whether the reoccurring rule violation should be presented for exception approval or whether an existing exception approval can be reused.

**Table 49: Permitted values**

Option is	Description
Enabled	A known rule violation must always be presented for exception approval, even if there is an exception approval from a previous violation of the rule.
Not set	A known rule violation is not presented again for exception approval if there is an exception approval from a previous violation of the rule. This exception approval is reused and the known rule violation is automatically granted exception.

If several rules are violated by a request and **Explicit exception approval** is set for one of the rules, the request is presented for approval to **all** exception approvers for this rule.

Rules that have **Explicit exception approval** set result in a renewed exception approval if:

- A rule check is carried out within the approval process for the current request.
  - AND -
    - a. The rule is violated by the current request.
  - OR -
    - b. The IT Shop customer has already violated the rule.

In case (a), the request for the IT Shop customer is presented to the exception approver. If the request is approved, case (b) applies to the next request. In case (b), every request for the IT Shop customer must be decided by the violation approver, even when the request itself does not result in a rule violation. The result you achieve is that assignments for employees who have been granted an exception, are verified and reapproved for every new request.

For more information about exception approvals, see the *One Identity Manager Compliance Rules Administration Guide*.

## Rule checking for requests with self-service

Self-service (SB approval procedure) is always defined as a one-step procedure. That means you cannot set up more approval steps in addition to a self-service approval step.

### **To realize compliance checking for requests with self-service**

- Create an approval workflow with a single approval level. The approval workflow contains an approval step with the CR approval procedure. For more information, see [Compliance checking requests](#) on page 124.

If the rule check is successful, the request is granted approval and self-service is accomplished implicitly.

To make exception approval possible for rule violations, add an approval level with the OC or OH approval procedure. For more information, see [Finding exception approvers](#) on page 126.

## Approving requests from an approver

By default, approvers can make approval decisions about requests in which they are themselves requester (UID\_PersonInserted) or recipient (UID\_PersonOrdered). To prevent this, you can specify the desired behavior in the following configuration parameter and in the approval step.

- **QER | ITShop | PersonOrderedNoDecide** configuration parameter
- **QER | ITShop | PersonInsertedNoDecide** configuration parameter
- **Approval by affected employee** option in the approval step.

If the requester or approver is not allowed to make approval decisions, their main identity and all subidentities are removed from the group of approvers.

#### **NOTE:**

- The configuration parameter setting also applies for fallback approvers; it does not apply to the chief approval team.
- This configuration parameter does not affect the BS and BR approval procedures. These approval procedures also find the requester and the request recipient if the configuration parameter is not set. For more information, see [Finding requesters](#) on page 115.

### **Summary of configuration options**

Requesters can approve their own requests if:

- The **PersonInsertedNoDecide** configuration parameter is not set.
- OR -
- The **Approval by affected employee** option is set.

Recipients can approve their own requests if:

- The **PersonOrderedNoDecide** configuration parameter is not set.
- OR -
- The **Approval by affected employee** option is set.

Requesters cannot approve if:

- The **PersonInsertedNoDecide** configuration parameter is set.
- The **Approval by affected employee** option is not set.

Recipients cannot approve if:

- The **PersonOrderedNoDecide** configuration parameter is set.
- The **Approval by affected employee** option is not set.

### Example

A department manager places a request for an employee. Both of them are found to be approvers by the approval procedure. To prevent the department manager from approving the request, set the **QER | ITShop | PersonInsertedNoDecide** parameter. To prevent the employer from approving the request, set the **QER | ITShop | PersonOrderedNoDecide** parameter.

### Approving requests from an exception approver

Similarly, you specify whether exception approvers are allowed to approve their own requests if compliance rules are violated by a request. For more information, see [Restricting exception approvers](#) on page 129.

### Related topics

- [Setting up approver restrictions](#) on page 134

# Setting up approver restrictions

## *To prevent recipients of requests becoming approvers*

- In the Designer, set the **QER | ITShop | PersonOrderedNoDecide** configuration parameter.

This configuration parameter takes effect if the **Approval by affected employee** option is not set on the approval step.

## *To prevent requesters becoming approvers*

- In the Designer, set the **QER | ITShop | PersonInsertedNoDecide** configuration parameter.

This configuration parameter takes effect if the **Approval by affected employee** option is not set on the approval step.

For individual approval workflows, you can allow exceptions to the general rule in the **PersonInsertedNoDecide** and **PersonOrderedNoDecide** configuration parameters. Use these options to allow the requester or recipient of requests to make approval decisions themselves in single approval steps.

## *To allow request recipients or requesters to become approvers in certain cases*

- On the approval step, enable the **Approval by affected employee** option.

## Related topics

- [Properties of an approval step](#) on page 89
- [Approving requests from an approver](#) on page 132

# Automatically approving requests

Approvers may be involved in an approval process more than once, for example, if they are also requesters or determined as approvers in various approval steps. In such cases, the approval process can be speeded up with automatic approval.

**NOTE:** Automatic approvals apply to all fallback approvers but not for the chief approval team.

Use configuration parameters to specify when automatic approvals are used. You can specify exceptions from default behavior for individual approval steps. Specify the behavior you expect in the following configuration parameters and approval steps.

- **QER | ITShop | DecisionOnInsert** configuration parameter
- **QER | ITShop | AutoDecision** configuration parameter

- **QER | ITShop | ReuseDecision** configuration parameter
- **No automatic approval** option in the approval step

## Summary of configuration options

Approval steps are automatically approved or denied if:

- The **QER | ITShop | DecisionOnInsert** configuration parameter is set.  
The **No automatic approval** option is not set.  
- OR -
- The **QER | ITShop | AutoDecision** configuration parameter is set.  
The **No automatic approval** option is not set.  
- OR -
- The **QER | ITShop | ReuseDecision** configuration parameter is set.  
The **No automatic approval** option is not set.

Requests are manually approved or denied if:

- The **QER | ITShop | DecisionOnInsert** configuration parameter is not set.  
- OR -
- The **QER | ITShop | AutoDecision** configuration parameter is not set.  
- OR -
- The **QER | ITShop | ReuseDecision** configuration parameter is not set.  
- OR -
- The **No automatic approval** option is set.

## Detailed information about this topic

- [Configuring automatic approval](#) on page 136

## Related topics

- [Approval by the chief approval team](#) on page 148
- [Approvers cannot be established](#) on page 143
- [Timeout on saving requests](#) on page 232

# Configuring automatic approval

## Scenario: An approver can grant or deny approval in several approval steps.

An approver may be authorized to approve several levels of an approval workflow. By default, the request is presented to the approver in each approval level. You can allow automatic approval so that the approver is not presented with a request more than once.

### *To allow an approver's decisions to be met automatically in several sequential approval levels*

- In the Designer, set the **QER | ITShop | AutoDecision** configuration parameter.  
The approval decision of the first approval levels is applied to subsequent approval levels for which the approver is authorized.  
The configuration parameter takes effect if the **No automatic approval** option is not enabled for the approval step.

### *To attain automatic acceptance for an approver's decisions for all non-sequential approval levels*

- In the Designer, set the **QER | ITShop | ReuseDecision** configuration parameter.  
If the approver granted approval to this request in an earlier approval step, the approval decision is transferred. If the approver did not grant approval in an earlier approval step, the request is presented for approval again.  
The configuration parameter takes effect if the **No automatic approval** option is not enabled for the approval step.

**IMPORTANT:** If the approver is also an exception approver for compliance rule violations, requests that violate compliance rules will also be automatically approved without being presented for exception approval.

## Scenario: Requester is also approver

Approvers can run requests for themselves. If a requester is determined to be approver for the request, their approval steps are immediately granted approval.

### *To prevent automatic approval for an approver's requests*

- In the Designer, disable the **QER | ITShop | DecisionOnInsert** configuration parameter.  
If a requester is determined to be the approver of an approval step, the request is presented to the requester to be approved.

The **QER | ITShop | DecisionOnInsert** configuration parameter is set by default and takes effect if the **No automatic approval** option is not enabled in the approval step.

If the **QER | ITShop | PersonInsertedNoDecide** configuration parameter is set, the requester does not become an approver and cannot approve the request. Also, the request cannot be decided automatically.



## Preventing automatic approval in individual cases

For single approval steps, you can configure exceptions to the general rule in the configuration parameters.

### *To prevent automatic approvals for particular approval steps*

- Enable the **No automatic approval** option in the approval step.

The **QER | ITShop | DecisionOnInsert**, **QER | ITShop | ReuseDecision**, and **QER | ITShop | AutoDecision** configuration parameters are not considered in this approval step. In each case, requests are to be presented to the approver of this approval step.

## Related topics

- [Automatically approving requests](#) on page 134
- [Properties of an approval step](#) on page 89
- [Approving requests from an approver](#) on page 132
- [Finding exception approvers](#) on page 126

# Approval by peer group analysis

Using peer group analysis, approval for requests can be granted or denied automatically. For example, a peer group might be all employees in the same department. Peer group analysis assumes that these employees require the same products. So, if a company resource has already been assigned to a majority of employees in a department, a new request for this company resource is automatically approved. This helps to accelerate approval processes.

Peer groups contain all employees with the same manager or belonging to the same primary or secondary department as the request's recipient. Configuration parameters specify which employee belong to the peer group. At least one of the following configuration parameters must be set.

- **QER | ITShop | PeerGroupAnalysis | IncludeManager:** Employees that have the same manager as the request's recipient
- **QER | ITShop | PeerGroupAnalysis | IncludePrimaryDepartment:** Employees that belong to the same primary department as the request's recipient
- **QER | ITShop | PeerGroupAnalysis | IncludeSecondaryDepartment:** Employees whose secondary department corresponds to the primary or secondary department of the request's recipient

The proportion of employees of a peer group who must already own the company resource, is set in the **QER | ITShop | PeerGroupAnalysis | ApprovalThreshold** configuration parameter. The threshold specifies the ratio of the total number of employees in the peer group to the number of employees in the peer group who already own this product.

You can also specify that employees are not allowed to request cross-functional products, which means, if the requested product and the primary department of the request recipient are from different functional areas, the request should be denied. To include this check in peer group analysis, set the **QER | ITShop | PeerGroupAnalysis | CheckCrossfunctionalAssignment** configuration parameter.

Requests are automatically approved for fully configured peer group analysis, if both:

- The requested product is not cross-functional
- The number of employees in the peer group who already own this product equals or exceeds the given threshold.

If this is not the case, requests are automatically denied.

To use this functionality, the One Identity Manager provides the `QER_PersonWantsOrg_Peer group analysis` process and the `PeergroupAnalysis` event. The process is run using an approval step with the EX approval procedure.

## Configuring peer group analysis for requests

### *To configure peer groups*

1. In the Designer, set the **QER | ITShop | PeerGroupAnalysis** configuration parameter.
2. Set at least one of the following subparameters:
  - **QER | ITShop | PeerGroupAnalysis | IncludeManager:** Employees who have the same manager as the request's recipient
  - **QER | ITShop | PeerGroupAnalysis | IncludePrimaryDepartment:** Employees who belong to the same primary department as the request's recipient
  - **QER | ITShop | PeerGroupAnalysis | IncludeSecondaryDepartment:** Employees whose secondary department corresponds to the primary or secondary department of the request's recipient

Thus, you specify which employees belong to the peer group. You can also set two or all of the configuration parameters.

3. To specify a threshold for the peer group, set the **QER | ITShop | PeerGroupAnalysis | ApprovalThreshold** configuration parameter and specify a value between **0** and **1**.

The default value is **0.9**. That means, at least 90 percent of the peer group members must already have the requested product so that the request can be approved.

4. (Optional) To check whether the requested product is cross-functional, enable the **QER | ITShop | PeerGroupAnalysis | CheckCrossfunctionalAssignment** configuration parameter.

- a. Assign the service items and departments to functional areas.  
Only functional areas that are primary assigned service items are taken into account.  
For more information about functional areas, see the *One Identity Manager Identity Management Base Module Administration Guide*.
  - b. Assign employees to primary departments.
5. In the Manager, create an approval workflow with at least one approval level. For the approval step, enter at least the following data:
  - Single step: **EXWithPeerGroupAnalysis**.
  - Approval procedure: **EX**
  - Event: **PeerGroupAnalysis**

The event starts the QER\_PersonWantsOrg\_Peer group analysis process, which runs the QER\_PeerGroupAnalysis script.

The script runs automatic approval and sets the approval step type to **Grant** or **Deny**.

### Detailed information about this topic

- [Approval by peer group analysis](#) on page 137

### Related topics

- [Approvals to be made externally](#) on page 113
- [General main data of a service item](#) on page 23

## Gathering further information about a request

Approvers are able to gather additional information about a request. This ability does not, however, replace granting or denying approval for a request. There is no additional approval step required in the approval workflow to obtain the information.

Approvers can request information in form of a question from anybody. The request is placed on hold for the period of the inquiry. Once the queried employee has supplied the necessary information and the approver has made an approval decision, the request is taken off hold. The approver can recall a pending inquiry at any time. The request is taken off hold. The approver's request and the employee's answer are recorded in the approval flow and are therefore available to the approver.

**NOTE:** If the approver who made the query is dropped, hold status is revoked. The queried employee must not answer. The request procedure continues.

For more information, see the *One Identity Manager Web Designer Web Portal User Guide*.

## Detailed information about this topic

- Email notification: [Notifications with questions](#) on page 175

# Appointing other approvers

Once an approval level in the approval workflow has been reached, approvers at this level can appoint another employee to handle the approval. To do this, you have the options described below:

- Rerouting approvals  
The approver appoints another approval level to carry out approvals. To do this, set up a connection to the approval level in the approval workflow to which an approval decision can be rerouted.
- Appointing additional approvers  
The approver appoints another employee to carry out the approval. The other approver must make an approval decision in addition to the known approvers. To do this, enable the **Additional approver possible** option in the approval step.  
The additional approver can reject the approval and return the requests to the original approver. The original approver is informed about this by email. The original approver can appoint another additional approver.
- Delegate approval  
The approver appoints another employee with approval. This employee is added to the current approval step as the approver. This employee then makes the approval decision instead of the approver who made the delegation. To do this, enable the **Approval can be delegated** option in the approval step.  
The current approver can reject the approval and return the requests to the original approver. The original approver can withdraw the delegation and delegate a different employee, for example, if the other approver is not available.

Email notifications can be sent to the original approvers and the others.

For more information, see the *One Identity Manager Web Designer Web Portal User Guide*.

## Detailed information about this topic

- [Connecting approval levels](#) on page 94
- [Editing approval levels](#) on page 88
- [Properties of an approval step](#) on page 89

## Related topics

- Email notification: [Delegating approvals](#) on page 175
- Email notification: [Rejecting approvals](#) on page 175

- Email notification: [Using additional approvers to approve requests](#) on page 176
- [Notifications in the request process](#) on page 168


## Escalating an approval step

Approval steps can be automatically escalated once the specified timeout is exceeded. The request is presented to another approval body. The request is then further processed in the normal approval workflow.

### To configure escalation of an approval step

1. Open the approval workflow in the Workflow Editor.
2. Add an additional approval level with one approval step for escalation.
3. Connect the approval step that is going to be escalated when the time period is exceeded with the new approval step. Use the connection point for escalation to do this.

**Figure 9: Example of an approval workflow with escalation**

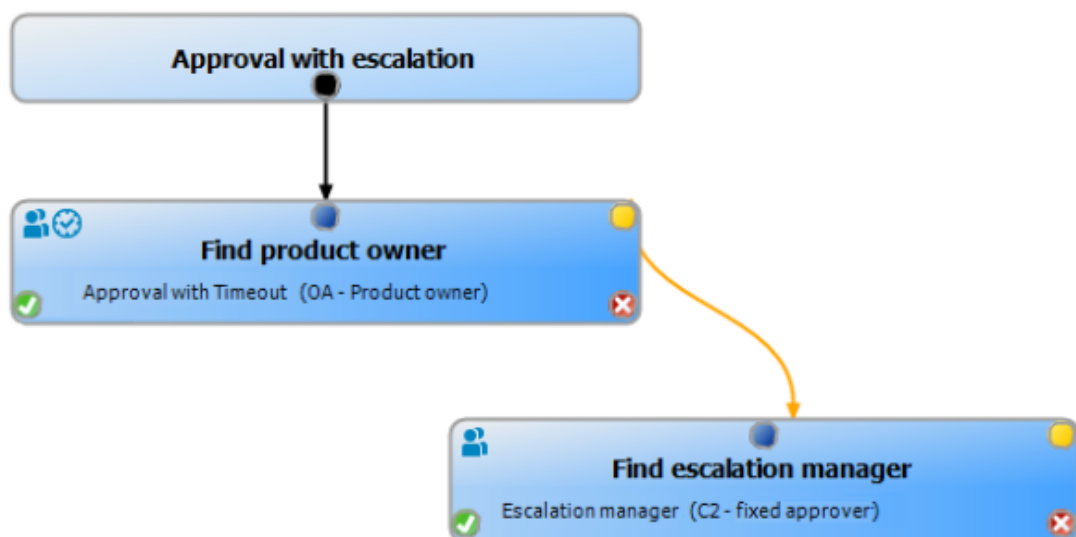

4. Configure the behavior for the approval step to be escalated when it times out.

**Table 50: Properties for escalation on timeout**

Property	Meaning
TimeOut (working hours)	Number of working hours to elapse after which the approval step is automatically granted or denied approval.

## Property Meaning

The working hours of the respective approver are taken into account when the time is calculated.

**NOTE:** Ensure that a state, county, or both is entered into the employee's main data of determining the correct working hours. If this information is missing, a fallback is used to calculate the working hours. For more information about calculating employees' working hours, see the *One Identity Manager Identity Management Base Module Administration Guide*.

**TIP:** Weekends and public holidays are taken into account when working hours are calculated. If you want weekends and public holidays to be dealt with in the same way as working days, set the **QBM | WorkingHours | IgnoreHoliday** oder **QBM | WorkingHours | IgnoreWeekend** configuration parameter. For more information about this, see the *One Identity Manager Configuration Guide*.

If more than one approver was found, then an approval decision for the approval step is not automatically made until the timeout for all approvers has been exceeded. The same applies if an additional approver has been assigned.

If an approver delegated approval, the time point for automatic approval is recalculated for the new approver. If this approval is rejected, the time point for automatic approval is recalculated for the original approver.

If an approver is queried, the approval decision must be made within the defined timeout anyway. The time point for automatic approval is not recalculated.

If additional approvers are determined by recalculating the current approvers, then the automatic approval deadline is not extended. The additional approvers must approve within the time frame that applies to the current approver.

---

Timeout behavior	Action that is run if the timeout expires. <ul style="list-style-type: none"><li>• <b>Escalation:</b> The request process is escalated. The escalation approval level is called.</li></ul>
------------------	--

5. (Optional) If the approval step still needs to be escalated but no approver be found and no fallback approver is assigned, set the **Escalate if no approver found** option.

In this case, the request is escalated instead of being canceled or passed to the chief approval team.

In the event of an escalation, email notifications can be sent to the new approvers and requesters.

## Related topics

- Email notification: [Demanding an approval decision](#) on page 169
- Email notification: [Escalating requests](#) on page 174

# Approvers cannot be established


You can specify a fallback approver if requests cannot be approved because no approvers are available. A request is then always assigned to the fallback approver for approval no approver can be found in an approval step in the specified approval procedure.

To specify fallback approvers, define application roles and assign these to an approval step. Different approval groups in the approval steps may also require different fallback approvers. Specify different application role for this, to which you can assign employees who can be determined as fallback approvers in the approval process. For more information, see the *One Identity Manager Authorization and Authentication Guide*.

### To specify fallback approvers for an approval step

- Enter the following data for the approval step.

**Table 51: Approval step properties for fallback approvers**

Property	Meaning
Fallback approver	<p>Application role whose members are authorized to approve requests if an approver cannot be determined through the approval procedure. Assign an application from the menu.</p> <p>To create a new application role, click . Enter the application role name and assign a parent application role. For detailed information, see the <i>One Identity Manager Authorization and Authentication Guide</i>.</p> <p><b>NOTE:</b> The number of approvers is not applied to the fallback approvers. The approval step is considered approved the moment as soon as one fallback approver has approved the request.</p>

### Request sequence with fallback approvers

1. No approver can be found for an approval step in an approval process. The request is assigned to all members of the fallback approver application role.
2. Once a fallback approver has approved a request, it is presented to the approvers at the next approval level.

**NOTE:** In the approval step, you can specify how many approvers must make a decision on this approval step. This limit is NOT valid for the chief approval team. The approval step is considered to be approved as soon as ONE fallback approver has approved the request.

3. The request is canceled if no fallback approver can be found.

Fallback approvers can make approval decisions on requests for all manual approval steps. Fallback approvals are not permitted for approval steps using the CR, SB, CD, EX, and WC approval procedures or OC and OH approval procedures.

### Related topics

- [Editing approval levels](#) on page 88
- [Selecting responsible approvers](#) on page 99
- [Approval by the chief approval team](#) on page 148
- [Escalating an approval step](#) on page 141

## Automatic approval on timeout

Requests can be automatically granted or denied approval once a specified time period has expired.



## To configure automatic approval if the timeout expires

- Enter the following data for the approval step.

**Table 52: Properties for automatic approval on timeout**

Property	Meaning
TimeOut (working hours)	<p>Number of working hours to elapse after which the approval step is automatically granted or denied approval.</p> <p>The working hours of the respective approver are taken into account when the time is calculated.</p> <p><b>NOTE:</b> Ensure that a state, county, or both is entered into the employee's main data of determining the correct working hours. If this information is missing, a fallback is used to calculate the working hours. For more information about calculating employees' working hours, see the <i>One Identity Manager Identity Management Base Module Administration Guide</i>.</p> <p><b>TIP:</b> Weekends and public holidays are taken into account when working hours are calculated. If you want weekends and public holidays to be dealt with in the same way as working days, set the <b>QBM   WorkingHours   IgnoreHoliday</b> oder <b>QBM   WorkingHours   IgnoreWeekend</b> configuration parameter. For more information about this, see the <i>One Identity Manager Configuration Guide</i>.</p> <p>If more than one approver was found, then an approval decision for the approval step is not automatically made until the timeout for all approvers has been exceeded. The same applies if an additional approver has been assigned.</p> <p>If an approver delegated approval, the time point for automatic approval is recalculated for the new approver. If this approval is rejected, the time point for automatic approval is recalculated for the original approver.</p> <p>If an approver is queried, the approval decision must be made within the defined timeout anyway. The time point for automatic approval is not recalculated.</p> <p>If additional approvers are determined by recalculating the current approvers, then the automatic approval deadline is not extended. The additional approvers must approve within the time frame that applies to the current approver.</p>
Timeout behavior	<p>Action, which is run if the timeout expires.</p> <ul style="list-style-type: none"><li>• <b>Approved:</b> The request is approved in this approval step. The next approval level is called.</li><li>• <b>Deny:</b> The request is denied in this approval step. The approval level for denying is called.</li></ul>

If a request is decided automatically, the requester can be notified by email.

## Related topics

- Email notification: [Approving or denying request approval](#) on page 172
- [Editing approval levels](#) on page 88

# Halting a request on timeout

Requests can be automatically halted once a specified time period has been exceeded. The action halts when either a single approval step or the entire approval process has exceeded the timeout.

**To configure halting after the timeout of a single approval step has been exceeded**

- Enter the following data for the approval step.

**Table 53: Properties of the approval step for halting on timeout**

Property	Meaning
Timeout (working hours)	<p>Number of working hours to elapse after which the approval step is automatically granted or denied approval.</p> <p>The working hours of the respective approver are taken into account when the time is calculated.</p> <p><b>NOTE:</b> Ensure that a state, county, or both is entered into the employee's main data of determining the correct working hours. If this information is missing, a fallback is used to calculate the working hours. For more information about calculating employees' working hours, see the <i>One Identity Manager Identity Management Base Module Administration Guide</i>.</p> <p><b>TIP:</b> Weekends and public holidays are taken into account when working hours are calculated. If you want weekends and public holidays to be dealt with in the same way as working days, set the <b>QBM   WorkingHours   IgnoreHoliday</b> oder <b>QBM   WorkingHours   IgnoreWeekend</b> configuration parameter. For more information about this, see the <i>One Identity Manager Configuration Guide</i>.</p> <p>If more than one approver was found, then an approval decision for the approval step is not automatically made until the timeout for all approvers has been exceeded. The same applies if an additional approver has been assigned.</p> <p>If an approver delegated approval, the time point for automatic approval is recalculated for the new approver. If this approval is rejected, the time point for automatic approval is recalculated for the original approver.</p> <p>If an approver is queried, the approval decision must be made within the defined timeout anyway. The time point for automatic approval is not recalculated.</p> <p>If additional approvers are determined by recalculating the current approvers, then the automatic approval deadline is not extended. The additional approvers must approve within the time frame that applies to the current approver.</p>
Timeout behavior	<p>Action that runs if the timeout expires.</p> <ul style="list-style-type: none"><li>• <b>Cancel:</b> The approval step, and therefore the entire approval process for the request, is canceled.</li></ul>

### ***To configure halting on timeout for the entire approval process***

- Enter the following data for the approval workflow.

**Table 54: Properties of the approval workflow for halting on timeout**

Property	Meaning
System halt (days)	Number of days to elapse after which the approval workflow, and therefore the system, automatically halts the entire approval process.

If a request is halted, the requester can be notified by email.

### **Related topics**

- Email notification: [Canceling requests](#) on page 174
- [Editing approval levels](#) on page 88
- [Setting up approval workflows](#) on page 87

## **Approval by the chief approval team**

Sometimes, approval decisions cannot be made for requests because the approver is not available or does not have access to One Identity Manager tools. To complete these requests, you can define a chief approval team whose members are authorized to intervene in the approval process at any time.

The chief approval team is authorized to approve, deny, or cancel requests in special cases or to authorize other approvers.

### **IMPORTANT:**

- The four-eye principle can be broken like this because chief approval team members can make approval decisions for requests at any time. Specify, on a custom basis, in which special cases the chief approval team may intervene in the approval process.
- The chief approval team members may always approve their own requests. The settings for the **QER | ITShop | PersonInsertedNoDecide** and **QER | ITShop | PersonOrderedNoDecide** configuration parameters do not apply for the chief approval team.
- Approvals made by the chief approval team are not automatically transferred to other approval levels. Settings for the **QER | ITShop | DecisionOnInsert**, **QER | ITShop | AutoDecision** and **QER | ITShop | ReuseDecision** configuration parameters do not apply to the chief approval team.
- In the approval step, you can specify how many approvers must make a decision on this approval step. This limit is not valid for the chief approval team. The

approval decision is considered to be made as soon as one member of the chief approval team has decided on the request.

- If an approval decision is made by the chief approval team, it overrides the approval decision of just one regular approver. This means, if three approvers must approve an approval step and the chief approval team makes a decision, two more are still required.

If a regular approver has added an additional approver, the chief approval team replaces both the regular and the additional approver.

The chief approval team can approve requests for all manual approval steps. The following applies:

- Chief approval team decisions are not permitted for approval steps using the CR, SB, CD, EX, and WC approval procedures or the OC and OH procedures.
- If a member of the chief approval team is identified as a regular approver for an approval step, they can only make an approval decision for this step as a regular approver.
- The chief approval team can also make an approval decision if a regular approver has submitted a query and the request is in hold status.


### ***To add members to the chief approval team***

1. In the Manager, select the **IT Shop > Basic configuration data > Chief approval team** category.
2. Select the **Assign employees** task.

In the **Add assignments** pane, assign the employees who are authorized to approve all requests.

**TIP:** In the **Remove assignments** pane, you can remove the assignment of employees.

#### ***To remove an assignment***

- Select the employee and double-click .
3. Save the changes.

### **Related topics**

- [Chief approval team](#) on page 195
- [Escalating an approval step](#) on page 141

## **Approving requests with terms of use**

Terms of use that explain conditions of use for a product can be stored for individual service items (for example, software license conditions). When someone requests this

product, the requester, and request recipient must accept the terms of use before the request can be finalized.

In order for the request recipient to accept the terms of use, the request must be assigned to the request recipient in the approval process. Set an approval workflow for such requests that contain a BR approval step and enable the **No automatic approval** option for this approval step. One Identity Manager provides a default approval procedure and a **Terms of Use acknowledgment for third-party orders (sample)** default approval policy that you can use for this. Using the default approval workflow as a basis, create your own approval workflow that returns the request to the request recipient and determines the approver after the terms of use have been accepted. Use the BR approval procedure to do this.

### ***To create an approval workflow for requests with terms of use***

1. Select the **IT Shop > Basic configuration data > Approval workflows > Predefined** category.
2. In the result list, select the **Terms of Use acknowledgment for third-party orders (sample)** approval workflow and run the **Change main data** task.
3. Select the **Copy workflow** task.
4. Enter a name for the copy and click **OK**.
5. Edit the copy. Modify the approval workflow to suit your requirements.
6. Create an approval policy and assign it to the approval workflow.
7. Assign service items to the approval policy, which are assigned terms of use.

### **Detailed information about this topic**

- [Setting up approval workflows](#) on page 87
- [Approval policies for requests](#) on page 80
- [General main data of a service item](#) on page 23
- [Adding to the IT Shop](#) on page 83

## **Using default approval processes**

By default, One Identity Manager supplies approval policies and approval workflows. These are used in the approval processes of the **Identity & Access Lifecycle** shop.

**Table 55: Default approval policies and workflows in the shop identity & access lifecycle**

Approval policies/ workflow	Description	Shelf   Product
Compliance checking simplified	Compliance checking and exception approval for all products on the shelf that do not have their own approval policy assigned to them. For more information, see <a href="#">Testing requests for rule compliance</a> on page 123.	Identity Lifecycle
Self-service	Assignment requests and delegations are automatically approved by default. For more information, see <a href="#">Standard products for assignment requests and delegation</a> on page 58.	Identity Lifecycle   Delegation
		Identity Lifecycle   Business role entitlement assignment
		Identity Lifecycle   Business role membership
Self-service	Automatic approval for all products on the shelf that do not have their own approval policy assigned to them. For more information, see <a href="#">Self-service</a> on page 103.	Group Lifecycle
Terms of Use acknowledgment for third-party orders (sample)	Copy template for requests with terms of use. For more information, see <a href="#">Approving requests with terms of use</a> on page 149.	
Challenge loss of role membership	Limited period assignment requests for role memberships are automatically granted approval. For more information, see <a href="#">Requests with limited validity period for changed role memberships</a> on page 183.	Identity Lifecycle   Challenge loss of role membership
New manager assignment	Requesting a change of manager must be approved by the new manager. For more information, see <a href="#">Requesting change of manager for an employee</a> on page 165.	Identity Lifecycle   New manager assignment
Approval of Active Directory	New Active Directory group requests must be approved	Group

Approval policies/ workflow	Description	Shelf   Product
group create requests	by the target system manager. The groups are added in One Identity Manager and published in the target system. For detailed information, see the <i>One Identity Manager Administration Guide for Connecting to Active Directory</i> .	Lifecycle   New Active Directory security group
		Group Lifecycle   New Active Directory distribution group
Approval of Active Directory group change requests	Changes to group type and range of Active Directory groups must be approved by the target system manager. For detailed information, see the <i>One Identity Manager Administration Guide for Connecting to Active Directory</i> .	Group Lifecycle   Modify Active Directory group
Approval of Active Directory group deletion requests	Deleting an Active Directory group, must be approved by the target system manager. For detailed information, see the <i>One Identity Manager Administration Guide for Connecting to Active Directory</i> .	Group Lifecycle   Delete Active Directory group
Approval of SharePoint group create requests	New SharePoint group requests must be approved by the target system manager. The groups are added in One Identity Manager and published in the target system. For detailed information, see the <i>One Identity Manager Administration Guide for Connecting to SharePoint</i> .	Group Lifecycle   New SharePoint group
Approval of Active Directory group membership requests	Product owners and target system managers can request members for groups in these shelves. For detailed information, see the <i>One Identity Manager Administration Guide for Connecting to SharePoint</i> .	Active Directory groups
Approval of Active Directory group membership requests II		Active Directory groups
Approval of group membership requests		SharePoint groups



Approval policies/ workflow	Description	Shelf   Product
Approval of system entitlement removal requests	This approval policy can be used to configure automatic deletion of memberships in Active Directory groups.	Approval of system entitlement removal requests
Approval of privileged access requests	Requests for access must be approved by the owner of the privileged object. To make an access request, additional system prerequisites must be met by the Privileged Account Management system. For more information about PAM access requests, see the <i>One Identity Manager Administration Guide for Privileged Account Governance</i> .	Privileged access   Password request Privileged access   SSH session request Privileged access   Remote desktop session request Privileged access   Telnet session request

## Request sequence

Shop customers can request, renew, and unsubscribe products as soon as an IT Shop solution is set up. Use the Web Portal to do this. Furthermore, requests, and cancellations are approved in the Web Portal. You can make an overview of pending and closed requests for yourself. You can also find an overview of pending and closed requests in the Manager. The status of pending requests is checked regularly by the DBQueue Processor. The review is started by the **IT Shop check** schedule.

Requests can have a limited time period, which means the requested product assignment is only valid with the validity period.

### General request sequence

1. A customer places a request in the Web Portal for:
  - a. A product.  
- OR -
  - b. Membership of a hierarchical role.  
- OR -
  - c. The assignment of a company resource to a hierarchical role.
2. The request goes through the assigned approval process.
3. If the request has been granted approval and the **Valid from** date has been reached:
  - a. The product is assigned to the customer. The company resource associated with the product is assigned indirectly to the customer.  
- OR -
  - b. The customer becomes a secondary member of the hierarchical role.  
- OR -
  - c. The company resource is assigned to the hierarchical role.

The request contains the **Assigned** status (PersonWantsOrg.OrderState = 'Assigned').

The product/membership/assignment remains until it is canceled.

Requests and the resulting assignments are displayed in the following table:

Requests	PersonWantsOrg
Product assignments	PersonInITShopOrg
Company resource assignments	For example, PersonHasQERResource ADSAccountInADSGroup
Hierarchical role assignments	For example, PersonInDepartment
Hierarchical role assignments	For example, DepartmentHasADSGroup

## General cancellation sequence

1. A customer cancels a product/membership/assignment in the Web Portal.  
- OR -  
A requested product/requested membership/requested assignment is automatically unsubscribed.
2. The cancellation goes through the assigned approval process.
3. If cancellation was granted approval and the expiry date has been reached:
  - a. The product's assignment is removed. The product's assigned to the associated company resource is also removed.  
- OR -
  - b. The customer's membership of the hierarchical role is removed.  
- OR -
  - c. The company resource's assignment to the hierarchical role is removed.

The request contains the **Unsubscribed** status (PersonWantsOrg.OrderState = 'Unsubscribed').

If a customer is removed from a shop, existing requests for this are closed. The products are unsubscribed and assignments are removed. If the customer changes to another shop, the product requests can be retained under certain circumstances. If the request is an assignment request, it can also be retained under certain circumstances, even if the requester is no longer a customer in the shop.

For more information about requesting products, see the *One Identity Manager Web Designer Web Portal User Guide*.

## Related topics

- [Examples of request results](#) on page 247
- [Requests with limited validity period](#) on page 159
- [Relocating a customer or product to another shop](#) on page 163
- [Removing customers from a shop](#) on page 64
- [Determining the responsible approvers](#) on page 120

# The request overview

## *To obtain an overview of all pending and closed requests*

1. In the Manager, select the **IT Shop | Requests | <filter>** category.
2. Select a request procedure in the result list.
3. Select the **Request overview** task.

## Displaying request details

### *To obtain detailed information about a request*

1. In the Manager, select the **IT Shop | Requests | <filter>** category.
2. Select a request procedure in the result list.
3. Select the **Request details** task.

This shows you the request data and the status of the request.

## Displaying the approval sequence

For pending requests, see the current status of the approval process. The approval sequence is shown as soon as the DBQueue Processor has determined the approvers for the first approval step. In the approval workflow, you can view the approval sequence, the results of each approval step, and the approvers found. If the approval procedure could not find an approver, the request is canceled by the system.

### *To display the approval sequence of a pending request*

1. In the Manager, select the **IT Shop > Requests > Pending requests > <Filter>** category.
2. Select a request procedure in the result list.
3. Select the **Approval sequence** task.

Each approval level of an approval workflow is represented by a special control. The approvers responsible for a particular approval step are shown in a tooltip. Pending attestation questions are also shown in tooltips. These elements are shown in color, the color code reflecting the current status of the approval level.

**Table 56: Meaning of the colors in an approval sequence  
(in order of decreasing importance)**

Color	Meaning
Blue	This approval level is currently being processed.
Green	This approval level has been granted approval.
Red	This approval level has been denied approval.
Yellow	This approval level has been deferred due to a question.
Gray	This approval level has not (yet) been reached.

## Displaying the approval history

The approval history displays each step of the request process. Here you can follow all the approvals in the approval process in a chronological sequence. The approval history is displayed for both pending and closed requests.

### *To view the approval history for a request*

1. In the Manager, select the **IT Shop | Requests | <filter>** category.
2. Select a request procedure in the result list.
3. Select the **Approval history** task.

These elements are shown in color, the color code reflecting the status of the approval steps.

**Table 57: Meaning of colors in the approval history**

Color	Meaning
Yellow	Request triggered.
Green	Approver has granted approval.
Red	Approver has denied approval. Request has been escalated. Approver has recalled the approval decision.
Gray	Product has been canceled. Request has been canceled. Request has been assigned to an additional approver. Additional attestor has withdrawn approval decision. Approval has been delegated New attestor has withdrawn the delegation.

Color	Meaning
	Request has been transferred to another shop. Request recipient has been changed. Request has been converted into a direct assignment.
Purple	Request renewed.
Orange	Approver has a query. The query has been answered. Query was canceled due to change of approver.
Blue	Approver has rerouted approval. The approval step was reset automatically.

## Requesting products more than once

The IT Shop distinguishes between single or multiple requestable products. Single request products are, for example, software, system roles, or Active Directory groups. These products cannot be requested if they have already been requested for the same time period.

Furthermore, an employee may need several of one type of company resources, for example, consumables. You can find company resources such as these mapped in One Identity Manager as **Multi-request resource** or **Multi requestable/unsubscribable resources**.

### Request sequence of multi-request resources

1. A customer requests a multi-request resource in the Web Portal.
2. The request goes through the appropriate approval process and is approved.  
The request is only saved in the PersonWantsOrg table. No entry is created in the PersonInITShopOrg table.
3. The resource can be canceled immediately. The request contains the **Unsubscribed** status (PersonWantsOrg.OrderState = 'Unsubscribed').  
The resource cannot be canceled by the customer.

### Request sequence of multi requestable/unsubscribable resources

1. A customer requests a multi requestable/unsubscribable resource in the Web Portal.
2. The request goes through the appropriate approval process and is approved.  
The request is only saved in the PersonWantsOrg table. No entry is created in the PersonInITShopOrg table.

3. The request contains the **Assigned** status (`PersonWantsOrg.OrderState = 'Assigned'`).

The resource can be unsubscribed by means of the Web Portal.

**TIP:** A customer-specific implementation of a process with the `PersonWantsOrg` root object for the `OrderGranted` result can be made in order to start a specified action when a multi-request resource is approved. For more information about defining processes, see *One Identity Manager Configuration Guide*.

## Related topics

- [Multi-request resources](#) on page 19
- [Examples of request results](#) on page 247

# Requests with limited validity period

Customers keep their requested products on the shelf until they themselves unsubscribe from them. Sometimes, however, products are only required for a certain length of time and can be canceled automatically after this time. Products that are intended to have a limited shelf life need to be labeled with the validity period. For more information, see [Products for requests with time restrictions](#) on page 46.

When a product with a limited request period is requested, One Identity Manager calculates the date and time at which the product is automatically unsubscribed (**Valid until**/expiry date of the request) from the current date and validity period specified in the service item. This deadline can be adjusted when the request is made.

As soon as a request is approved by all approvers, the expiration date is recalculated from the actual date and the validity period. This ensures that the validity period is valid from the day of assignment.

A **Valid from** date can also be entered at the time of request. This specifies the date that an assignment starts to apply. If this date is given, the expiry date is calculated from the **Valid from** date and the validity period. If the validity period has already expired when approval is granted, the request can no longer be approved. The request is canceled and an error message is displayed.

Cancellations can include a validity period, which means a deadline for the cancellation is set for unlimited requests. Use this method to change the expiry date for requests with a validity period. Once the cancellation has been granted approval, the cancellation's validity period is taken as the new expiry date of the request. The request cannot be extended beyond the validity period.

## Multiple requests for a product with limited validity period

If a customer has requested a product with a limited validity period, the validity period must be tested for validity in subsequent requests for this product for the same customer. If the validity period is not in effect, the request is not permitted. By default, new requests are permitted if they fall in a time period that is not covered by another pending request. However, the validity periods of different requests may not overlap. You can define the

desired behavior for the validity period over configuration parameters. For more information, see [Checking request validity periods](#) on page 161.

## Related topics

- [Renewing requests](#) on page 160
- [Canceling or unsubscribing requests](#) on page 161

# Renewing requests

The request recipient receives a message before reaching the expiry date and has the possibility to extend the period. For more information, see [Sequence for limited requests](#) on page 171. The request is canceled once the expiry date has been reached.

The customer has the option to renew a request. If the customer uses this option, the extension (as in the original request) needs to be approved through an approval process. The renewal workflow stored with the approval policy is used for this purpose. If the extension is denied, the original request runs out at the given date. You can also limit renewals in the same way. The renewal's expiration date is calculated from the date of the renewal's approval and the validity period of the product if no **Valid until** date was specified at the time of the renewal.

A limited request might look like the following a sequence:

Service item	Validity period: 90 days
Requested on: 1/2/2017	Valid until: 4/1/2017 11:59 PM
Approved on: 1/5/2017	Valid until: 4/5/2017 11:59 PM
Renewed until: 3/31/2017	Renewal valid until: 4/30/2017 12:00 PM
Approved on: 4/2/2017	Valid until: 4/30/2017 12:00 PM
Canceled on: 4/10/2017	Unsubscribed as from: 4/14/2017 11:59 PM
Approved on: 4/11/2017	Valid until: 4/11/2017 11:59 PM

**NOTE:** Ensure that times in the One Identity Manager tools, for example, the Web Portal, are in the user's local time.

## Related topics

- [Requests with limited validity period](#) on page 159
- [Canceling or unsubscribing requests](#) on page 161



# Canceling or unsubscribing requests

DBQueue Processor checks whether the request's expiry date has passed using a scheduled One Identity Manager task, which compares it against current UTC time. If the expiry date has passed, the request is canceled; the resulting assignments removed. You can configure this behavior.

If necessary, temporary requests can be unsubscribed. If the expiry date has passed, the unsubscription workflow stored at the decision guideline is run in this case. The unsubscription must be approved; only then will the assignment be permanently removed. If another request exists for the product, perhaps with the status **Pending**, the expired request will be canceled and replaced by the pending request.

## *To unsubscribe temporary requests on expiry*

- In the Designer, set the **QER | ITShop | ExceededValidUntilUnsubscribe** configuration parameter.

If the configuration parameter is set, requests with the status **Assigned** or **Renewal** will be unsubscribed. The unsubscription workflow entered in the approval policy runs through if no other request exists for the product, which now takes effect. Once the unsubscription is approved, the assignment will be removed. Expired requests with the status **approved**, **pending**, **request** are canceled.

**NOTE:** If the unsubscription is denied, the approver must enter a new **Valid until** date. Otherwise, the request is given **Assigned** status and the unsubscription workflow runs again.

## Related topics

- [Requests with limited validity period](#) on page 159
- [Renewing requests](#) on page 160

# Checking request validity periods

If a customer has requested a product with a limited validity period, the validity period must be tested for validity in subsequent requests for this product for the same customer. If the validity period is not in effect, the request is not permitted. By default, new requests are permitted if they fall in a time period that is not covered by another pending request. However, the validity periods of different requests may not overlap. You can define the desired behavior for the validity period over configuration parameters. The configuration parameters are set by default. In this check, all requests of the same product for the same request recipient are taken into account even if the product came from different shelves.

### To define differing behavior

- In the Designer, enable the desired option for the **QER | ITShop | GapBehavior | GapDefinition** and **QER | ITShop | GapBehavior | GapFitting** configuration parameters.

**Table 58: Effect of the QER | ITShop | GapBehavior | GapDefinition configuration parameter**


Option	Description
0	Only pending requests are taken into account by the check. (default)
1	Only approved requests are taken into account by the check.
2	Only assigned requests are taken into account by the check.

**Table 59: Effect of the QER | ITShop | GapBehavior | GapFitting configuration parameter**


Option	Description
0	Validity periods can overlap. (default) A new request is accepted if its validity period fits into at least one free time slot between two existing requests.
1	Validity periods cannot overlap. A new request is accepted if its validity period fits exactly into a free time slot between two existing requests.
2	The validity period is not checked. A request is accepted even if there is already a request for the same validity period.

If the configuration parameters are disabled, One Identity Manager behaves as in option **0**.

**Figure 10: Example of possible validity period for GapDefinition = 0 and GapFitting = 0**

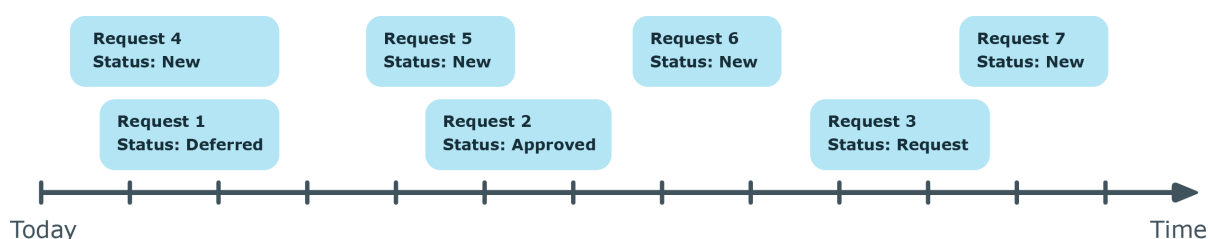

**Figure 11: Example of possible validity period for GapDefinition = 1 and GapFitting = 1**

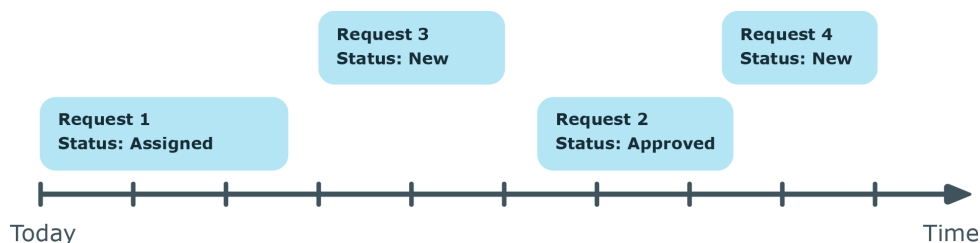

## Related topics

- [Request statuses](#) on page 245

# Relocating a customer or product to another shop

If a customer requests a product from a shop or shopping center and then changes to another at a later date, the product request is closed and the product is canceled. The same applies if a requested product is moved to another shelf.

You can label product service items with **Retain service item assignment on relocation** to retain their requests when they relocate. All pending or approved requests in the shop are transferred to any shop in which the employee is a customer and that contains the requested products. In connection with this, pending requests are reset, which means the requests have to go through the approval process from the beginning again.

## Detailed information about this topic

- [Product request on customer or product relocation](#) on page 46

## Related topics

- [Removing customers from a shop](#) on page 64

# Changing approval workflows of pending requests

When approval workflows are changed, a decision must be made as to whether these changes should be applied to pending requests. Configuration parameters are used to define the desired procedure.

## Scenario: Another approval workflow was stored with the approval policy

If changes have been made to the approval, renewal, or cancellation workflow in an approval policy, any pending approval processes are continued by default with the original workflow. The newly stored workflow is only used in new requests. You can configure different behavior.

### *To specify how to handle pending requests*

- In the Designer, enable the **QER | ITShop | OnWorkflowAssign** configuration parameter and select one of the following values.
  - **CONTINUE:** Ongoing approval processes are continued with the originally applicable workflow. The newly stored workflow is only used in new requests. This behavior also applies if the configuration parameter is not set.
  - **RESET:** In ongoing approval processes, all approval decisions already taken are reset. The approval processes are restarted with the newly stored workflow.
  - **ABORT:** Ongoing approval processes are stopped. All pending requests are closed. The customer must request, renew, or cancel the product again, if required.

A working copy of the originally applicable workflow is saved. The working copy is retained as long as it is used in ongoing approval processes. All unused working copies are regularly deleted using the **Maintenance approval workflows** schedule.

If the assigned renewal or cancellation workflow is deleted, any ongoing approval processes are stopped.

## Scenario: A change was made to an approval workflow in use

If changes have been made to an approval workflow that is being used in pending requests, any pending approval processes are continued by default with the original workflow. The changes to the approval workflow are only implemented for new requests. You can configure different behavior.

### *To specify how to handle pending requests*

- In the Designer, enable the **QER | ITShop | OnWorkflowUpdate** configuration parameter and select one of the following values.
  - **CONTINUE:** Ongoing approval processes are continued with the originally applicable approval workflow. The changes to the approval workflow are only implemented for new requests. This behavior also applies if the configuration parameter is not set.
  - **RESET:** In ongoing approval processes, all approval decisions already taken are reset. The approval processes are restarted with the changed approval workflow.

- **ABORT:** Ongoing approval processes are stopped. All pending requests are closed. The customer must request, renew, or cancel the product again, if required.

A working copy of the approval workflow that contains the original version is saved. This working copy is retained as long as it is used in ongoing approval processes. All unused working copies are regularly deleted using the **Maintenance approval workflows** schedule.

## Related topics

- [Determining the responsible approvers](#) on page 120

# Requests for employees

In the Web Portal default installation, approvers can request and cancel products for other users. Approvers can only request products for users of shops they manage and where the user is an customer. Furthermore, department managers and their deputies may edit the data for employees belonging to their department.

The responsibilities are evaluated through the following database view (View).

QER\_VEditEmployee This view displays the department manager, their deputies, and employees whose data can be edited.

# Requesting change of manager for an employee

Managers can edit main data of their employees in the Web Portal. In the same context, it is possible to define a new manager for an employee. To do this, the previous manager requests assignment of another manager. If the other manager agrees to the assignment, they are assigned to the employee as manager.

## Prerequisites

The following objects are made available in the One Identity Manager database by default:

**Table 60: Default objects for the change of manager**

Objects	Description
<b>New manager assignment</b> multi-request	Is used to request the other manager in the IT Shop. The product is canceled the moment the new manager has been

Objects	Description
resource	assigned. The <b>New manager assignment</b> service item is assigned.
<b>New manager assignment</b> service item	Product that is ordered when another manager is assigned. The <b>New manager assignment</b> approval policy is assigned.
<b>Identity &amp; Access Lifecycle   Identity Lifecycle</b> IT Shop structure	The service item is assigned by default to the <b>Identity Lifecycle</b> shelf in the <b>Identity &amp; Access Lifecycle</b> shop.
<b>New manager assignment</b> approval policy	This specifies the approval workflow by which the change of manager is approved. It is assigned to the approval workflow, <b>New manager assignment</b> .
<b>New manager assignment</b> approval workflow	This determines the other manager as an approver. If this is denied, the request is returned to the previous manager.
VI_ESS_PersonWantsOrg_Set_New_Person.Manager process	Allocates the other manager to the employee as manager as soon as the change of manager was approved and the validity period of the request is reached.

## Procedure for changing managers

1. The previous manager edits the main data of the employee the other manager is going to take on. They select an employee as manager and specify a date from which the changes take effect.

**Table 61: Changes that are requested**

Property	Description
New manager	Employee to be assigned as a new manager for the employee.
Effective date	The date on which the change takes effect.
Changes to be run after approval is granted	Changes that should be run after approval has been granted and the new manager has been assigned, for example, deleting user accounts or removing memberships in system entitlements. The previous manager can decide which of the changes listed should be run.

2. A request with the following properties is triggered.

**Table 62: Properties of the manager change request**

Property	Description
Requester	Previous manager.
Recipient	Employee.
Additional request data	New manager.
Approver	New manager.
Valid from	The date on which the change takes effect.
Additional data	Additional changes to be run.

3. The request is assigned for approval to the new manager, who can also specify what other changes should be made after the manager has been replaced.
  - a. If the manager denies approval, the request is returned to the previous manager.

This manager can select another manager and approve the request. The request is assigned to this other manager for approval.

The previous manager can deny request approval. The change of manager is closed. The employee's manager is not changed.
  - b. If the new manager grants approval to the request, they are assigned as manager to the employee from the validity date of the request. All selected additional changes are also run on the validity date.
4. Product is unsubscribed. The request is closed.

For more information about assigning a new manager, see the *One Identity Manager Web Designer Web Portal User Guide*.

## Canceling requests

Request recipients, requesters, and the members of the chief approval team can cancel requests that have not already be approved in the Web Portal. The approval process is canceled immediately. The request is given the **Canceled** status.

For more information about canceling processes in the Web Portal, see the *One Identity Manager Web Designer Web Portal User Guide*.

### **To cancel a request in the Manager**

1. In the Manager, select the **IT Shop > Requests > Pending requests > <filter> > <request>** category.
2. Select a request procedure in the result list.
3. Click **Cancel request**.

4. Confirm the security prompt with **Yes**.
5. Click **OK**.

## Unsubscribe products

Assigned products that are no longer needed can be unsubscribed. Each request undergoes an approval process. If an unsubscription workflow is stored with the approval policy, unsubscription is approved or denied by an approver. If there is no unsubscription workflow given, unsubscription is approved immediately.

If the request's **Valid until** date has already expired and unsubscription is likely to be denied, the approver must enter a new **Valid until** date.

Request recipients can be notified if a request is unsubscribed by another employee.

### Related topics

- [Request sequence](#) on page 154
- [Requests with limited validity period](#) on page 159
- [General main data of approval policies](#) on page 81
- [Unsubscribing approved requests](#) on page 177

## Notifications in the request process

In a request process, various email notifications can be sent to requesters and approvers. The notification procedure uses mail templates to create notifications. The mail text in a mail template is defined in several languages. This ensures that the language of the recipient is taken into account when the email is generated. Mail templates are supplied in the default installation with which you can configure the notification procedure.

Messages are not sent to the chief approval team by default. Fallback approvers are only notified if not enough approvers could be found for an approval step.

### ***To use notification in the request process***

1. Ensure that the email notification system is configured in One Identity Manager. For more information, see the *One Identity Manager Installation Guide*.
2. In the Designer, set the **QER | ITShop | DefaultSenderAddress** configuration parameter and enter the sender address used to send the email notifications.
3. Ensure that all employees have a default email address. Notifications are sent to this address. For more information, see the *One Identity Manager Identity Management Base Module Administration Guide*.



4. Ensure that a language can be determined for all employees. Only then can they receive email notifications in their own language. For more information, see the *One Identity Manager Identity Management Base Module Administration Guide*.
5. Configure the notification procedure.

### Related topics

- [Custom mail templates for notifications](#) on page 220

## Demanding an approval decision

When a customer requests a product, the approver is notified that new approvals are pending.

### Prerequisite

- The **QER | ITShop | MailTemplateIdents | RequestApproverByCollection** configuration parameter is not set.

### To set up the notification procedure

- On the **Mail templates** tab of the approval step, enter the following data:

**Mail template request:** IT Shop Request - approval required

**TIP:** To allow approval by email, select the **IT Shop Request - approval required (by email)** mail template.

**NOTE:** You can schedule demands for approval to send a general notification if there are requests pending. This replaces single demands for approval at each approval step.

### Related topics

- Email notification: [Scheduled demand for approval](#) on page 171
- [Approval by mail](#) on page 178
- [Editing approval steps](#) on page 89

## Reminding approvers

If an approver has not made a decision by the time the reminder timeout expires, notification can be sent by email as a reminder. The approvers work time applies to the time calculation.

## Prerequisite

- The **QER | ITShop | MailTemplateIdsents | RequestApproverByCollection** configuration parameter is not set.

## To set up the notification procedure

- Enter the following data for the approval step.

**Table 63: Properties of the approval step for notification**

Property	Meaning
Reminder interval (hours)	<p>Number of working hours to elapse after which the approver is notified by mail that there are still pending requests for approval.</p> <p><b>NOTE:</b> Ensure that a state, county, or both is entered into the employee's main data of determining the correct working hours. If this information is missing, a fallback is used to calculate the working hours. For more information about calculating employees' working hours, see the <i>One Identity Manager Identity Management Base Module Administration Guide</i>.</p> <p><b>TIP:</b> Weekends and public holidays are taken into account when working hours are calculated. If you want weekends and public holidays to be dealt with in the same way as working days, set the <b>QBM   WorkingHours   IgnoreHoliday</b> oder <b>QBM   WorkingHours   IgnoreWeekend</b> configuration parameter. For more information about this, see the <i>One Identity Manager Configuration Guide</i>.</p> <p>If more than one approver was found, each approver will be notified. The same applies if an additional approver has been assigned.</p> <p>If an approver delegated the approval, the time point for reminding the delegation recipient is recalculated. The delegation recipient and all the other approvers are notified. The original approver is not notified.</p> <p>If an approver has made an inquiry, the time point for reminding the queried employee is recalculated. As long as the inquiry has not been answered, only this employee is notified.</p>
Mail template reminder	<p>Select the <b>IT Shop Request - Remind approver</b> mail template.</p> <p><b>TIP:</b> To allow approval by email, select the <b>IT Shop Request - remind approver (by email)</b> mail template.</p>

**NOTE:** You can schedule demands for approval to send a general notification if there are requests pending. This replaces single demands for approval at each approval step.

## Related topics

- Email notification: [Notifications with questions](#) on page 175
- Email notification: [Scheduled demand for approval](#) on page 171

- [Approval by mail](#) on page 178
- [Editing approval steps](#) on page 89

## Scheduled demand for approval

Approvers can be regularly notified of requests that are pending. These regular notifications replace the individual prompts and approval reminders that are configured in the approval step.

### *To send regular notifications about pending requests*

1. Enable the **QER | ITShop | MailTemplateIdents | RequestApproverByCollection** configuration parameter in the Designer.  
By default, a notification is sent with the **IT Shop request - pending requests for approver** mail template.  
**TIP:** To use something other than the default mail template for these notifications, change the value of the configuration parameter in the Designer.
2. In the Designer, configure and enable the **Inform approver about pending requests** schedule.

For detailed information, see *One Identity Manager Operational Guide*.

## Sequence for limited requests

A recipient keeps a product on the shelf up to a specific point in time when they unsubscribe the products again. Sometimes, however, products are only required for a certain length of time and can be canceled automatically. The recipient is notified by email before the expiry date is reached and has the option to renew the request.

### *To set up the notification procedure*

1. In the Designer, set the **QER | ITShop | ValidityWarning** configuration parameter and enter the warning period (in days) for expiring requests.
2. In the Designer, configure and activate the **Reminder for IT Shop requests that expire soon** schedule.
3. Enter the following data for the approval policy:
  - **Mail template expired:** Select the mail template to be used for the email notification. The default installation provides the **IT Shop request - product expires** and **IT Shop request - expired** mail templates.
4. Save the changes.

## Related topics

- [Requests with limited validity period](#) on page 159
- [Approval policies for requests](#) on page 80

# Approving or denying request approval

When a request is granted approval or denied, the request recipient is notified by email. Notification may occur after approval or denial of a single approval step or once the entire approval process is complete. Requests can be automatically granted or denied approval once a specified time period has expired. The recipient is notified in the same way in this case.

## *To set up the notification procedure*

- If notification should be sent immediately after an approval decision is made for a single approval step, enter the following data on the **Mail templates** tab of the approval step.
  - **Mail template approved:** IT Shop request - approval granted for approval step
  - **Mail template denied:** IT Shop request - approval not granted for approval step
- Enter the following data in the approval policy when notification should immediately follow the approval decision of the entire approval process:
  - **Mail template approved:** IT Shop request - approval granted
  - **Mail template denied:** IT Shop request - approval not granted

## Related topics

- [Approval policies for requests](#) on page 80
- [Editing approval steps](#) on page 89

# Notifying delegates

A delegator can, if required, receive notifications if the recipient of the delegation has made an approval decision in the IT Shop. Notification is sent once an employee has been determined as an approver due to delegation and has made an approval decision for the request.

**To send notification when the employee who was delegated an approval approves or denies the request**

- In the Designer, set the **QER | ITShop | Delegation | MailTemplateIds | InformDelegatorAboutDecisionITShop** configuration parameter.

By default, a notification is sent with the **Delegation - inform delegator about decided request** mail template.

**TIP:** To use custom mail templates for emails of this type, change the value of the configuration parameter.

Delegations are taken into account in the following default approval procedures.

**Table 64: Delegation relevant default approval procedures**

Delegation of	Approval procedure
Department responsibilities	D0, D1, D2, DM, DP, MS
Cost center responsibilities	P0, P1, P2, PM, PP, MS
Location responsibilities	MS
Business role responsibilities	OM, MS
Employee responsibilities	CM
IT Shop structure responsibilities	H0, H1, H2
Memberships in business roles	OR
Memberships in application roles	DI, DR, ID, IL, IO, IP, OA, OC, OH, PI, PR, RD, RL, RO, RP, TO

**Example**

Jon Blogs is responsible for the R1 business role. He delegates his responsibility for the business role to Clara Harris. Clara Harris is herself responsible for R2 business role.

A member of the R1 business role requests a product in the IT Shop. Jon Bloggs is established as an approver through the **OM - Manager of a specific role** approval process. The request is assigned to Clara Harris for approval through delegation. Jon Blogs is notified as soon as Clara Harris has made her approval decision.

A member of the R2 business role requests a product in the IT Shop. Clara Harris is established as the approver through the **OM - Manager of a specific role** approval process. No notification is sent because Clara Harris does not make the approval decision due to delegation.

## Bulk delegation

You have the option to delegate all your responsibilities to one person in the Web Portal. If you have a lot of responsibilities, it is possible that not all the delegations are carried out. A delegator can send a notification to themselves if an error occurs.

### Detailed information about this topic

- [Bulk delegation notifications](#) on page 178

### Related topics

- [Default approval procedures](#) on page 99
- [Using additional approvers to approve requests](#) on page 176

## Canceling requests

Requests can be automatically canceled for various reasons, for example, when a specified time period has expired or if no approver can be found. The request recipient is notified.

### *To set up the notification procedure*

- In the approval policy, on the **Mail templates** tab, enter the following data.  
**Mail template stopped:** IT Shop request - canceled

### Related topics

- [Editing approval steps](#) on page 89

## Escalating requests

Requests can be escalated if a specified time period has expired. If a request is escalated, the requester can be notified by email.

### *To set up the notification procedure*

- On the **Mail templates** tab of the approval step, enter the following data:  
**Mail template escalation:** IT Shop request - Escalation

### Related topics

- [Editing approval steps](#) on page 89

# Delegating approvals

If, in an approval step, other approvers can be authorized to make the approval decision, the additional approvers can be prompted to approve by email. The same applies if the approval can be delegated.

## *To set up the notification procedure*

- On the **Mail templates** tab of the approval step, enter the following data:  
**Mail template delegation:** IT Shop Purchase order - Delegated/additional approval  
**TIP:** To enable approval by email, select the **IT ShopRequest - delegated/additional approval (by email)** mail template.

## Related topics

- [Approval by mail](#) on page 178
- [Appointing other approvers](#) on page 140
- [Editing approval steps](#) on page 89

# Rejecting approvals

The original approver must be notified if an additional approver or employee to whom an approval has been delegated refuses the approval.

## *To set up the notification procedure*

- On the **Mail templates** tab of the approval step, enter the following data:  
**Mail template rejection:** IT Shop Purchase order - Reject approval  
**TIP:** If you allow approval by email, select the mail template **IT Shop request - reject approval (by mail)**.

## Related topics

- [Approval by mail](#) on page 178
- [Editing approval steps](#) on page 89

# Notifications with questions

Employees can be notified when a question about a request is asked. Similarly, the approvers can also be notified as soon as the question is answered.

### ***To send a notification when an approver asks a question***

- In the Designer, enable the **QER | ITShop | MailTemplateIds | QueryFromApprover** configuration parameter.

A notification is sent by default with the **IT Shop Request - question** mail template.

### ***To send a notification to the approver when the queried employee answers a question***

- In the Designer, set the **QER | ITShop | MailTemplateIds | AnswerToApprover** configuration parameter.

A notification is sent by default with the **IT Shop Request - answer** mail template.

**TIP:** To use custom mail templates for emails of this type, change the value of the configuration parameter.

## **Using additional approvers to approve requests**

The original approver can be notified when an additional approver or an employee who has been delegated an approval has granted or denied the request. This mail is sent the moment the approval step has been decided.

### ***To send a notification when the additional approver approves or denies the request***

- In the Designer, set the **QER | ITShop | MailTemplateIds | InformAddingPerson** configuration parameter.

A notification is sent by default with the **IT Shop request - approval of added step** mail template.

### ***To send notification when the employee who was delegated an approval approves or denies the request***

- In the Designer, set the **QER | ITShop | MailTemplateIds | InformDelegatingPerson** configuration parameter.

A notification is sent by default with the **IT Shop request - approval of delegated step** mail template.

**TIP:** To use custom mail templates for emails of this type, change the value of the configuration parameter.



# Unsubscribing approved requests

Request recipients can be notified if a request is unsubscribed by another employee. The email is sent immediately after approval has been granted for unsubscribing.

## *To set up the notification procedure*

- Enter the following data for the approval policy:  
**Mail template canceled:** IT Shop request - Canceled

## Related topics

- [Approval policies for requests](#) on page 80

# Renewing approved requests

Request recipients can be notified when a request has been renewed. The email notification is sent immediately after approval for the renewal has been granted.

## *To set up the notification procedure*

- Enter the following data for the approval policy:  
**Mail template renewed:** IT Shop request - Renewed

## Related topics

- [Approval policies for requests](#) on page 80

# Product change notifications

Employees can be notified when a product is replaced by another product on a fixed date. The request recipient is automatically notified by email once notification procedures are in place and the **Change product** task is run.

### TIP:

#### *To use different mail template than the default for this notification*

1. Open the VI\_ESS\_PersonWantsOrg Send Mail Product Expires Soon process in the Designer.
2. Change the process properties in the pre-script for generating the UID\_RichMail.
3. Select the **Database > Save to database** and click **Save**.

## Detailed information about this topic

- [Notifications in the request process](#) on page 168

# Default mail templates

One Identity Manager supplies mail templates by default. These mail templates are available in English and German. If you require the mail body in other languages, you can add mail definitions for these languages to the default mail template.

### *To edit a default mail template*

- In the Manager, select the **IT Shop > Basic configuration data > Mail templates > Predefined** category.

## Related topics

- [Custom mail templates for notifications](#) on page 220

# Bulk delegation notifications

You have the option to delegate all your responsibilities to one person in the Web Portal. If you have a lot of responsibilities, it is possible that not all the delegations are carried out. A delegator can send a notification to themselves if an error occurs.

### *To send a notification if bulk delegation fails*

- In the Designer, set configuration parameter **QER | ITShop | MailTemplateIds | InformRequestorAboutMassDelegationErrors**.  
By default, a notification using the **Delegation - mass delegation errors occurred** mail template is sent.

**TIP:** To use something other than the default mail template for these notifications, change the value of the configuration parameter in the Designer.

## Related topics

- [Bulk delegation errors](#) on page 233

# Approval by mail

To provide approvers who are temporarily unable to access One Identity Manager tools with the option of making approval decisions on requests, you can set up approvals by

email. In this process, approvers are notified by email when a request attestation case is pending their approval. Approvers can use the relevant links in the email to make approval decisions without having to connect to the Web Portal. This generates an email that contains the approval decision and in which approvers can state the reasons for their approval decision. This email is sent to a central mailbox. One Identity Manager checks this mailbox regularly, evaluates the incoming emails and updates the status of the request procedures correspondingly.

**IMPORTANT:** An approval cannot be sent by email if multi-factor authentication is configured for the requested product. Approval mails for such requests produce an error message.

## Prerequisites

- If you use a Microsoft Exchange mailbox, configure the Microsoft Exchange with:
  - Microsoft Exchange Client Access Server version 2007, Service Pack 1 or higher
  - Microsoft Exchange Web Service .NET API Version 1.2.1, 32-bit
- If you use an Exchange Online mailbox, register an application in your Azure Active Directory tenant in the Microsoft Azure Management Portal. For example, One Identity Manager <Approval by mail>.

For detailed information about how to register an application, see <https://docs.microsoft.com/en-us/exchange/client-developer/exchange-web-services/how-to-authenticate-an-ews-application-by-using-oauth#register-your-application>.

- The One Identity Manager Service user account used to log into Microsoft Exchange or Exchange Online requires full access to the mailbox given in the **QER | ITShop | MailApproval | Inbox** configuration parameter.
- The **QER | ITShop | MailTemplateIdsents | RequestApproverByCollection** configuration parameter is not set.

## To set up approval by email

1. In the Designer, set the **QER | ITShop | MailApproval | Inbox** configuration parameter and enter the mailbox to which the approval mails are to be sent.
2. Set up mailbox access.
  - If you use a Microsoft Exchange mailbox:
    - By default, One Identity Manager uses the One Identity Manager Service user account to log in to the Microsoft Exchange Server and access the mailbox.
    - OR -
    - You enter a separate user account for logging in to the Microsoft Exchange Server for mailbox access.

- In the Designer, set the **QER | ITShop | MailApproval | Account** configuration parameter and enter the user account's name.
  - In the Designer, set the **QER | ITShop | MailApproval | Domain** configuration parameter and enter the user account's domain.
  - In the Designer, set the **QER | ITShop | MailApproval | Password** configuration parameter and enter the user account's password.
  - If you use an Exchange Online mailbox:
    - In the Designer, set the **QER | ITShop | MailApproval | AppId** configuration parameter and enter the application ID that was generated when the application was registered in the Azure Active Directory tenant.
    - In the Designer, set the **QER | ITShop | MailApproval | Domain** configuration parameter and enter the domain for logging into Azure Active Directory.
    - In the Designer, set the **QER | ITShop | MailApproval | Password** configuration parameter and enter the client secret (application password) for the application.
3. In the Designer, set the **QER | ITShop | MailTemplateIds | ITShopApproval** configuration parameter.
- The mail template used to create the approval decision mail is stored with this configuration parameter. You can use the default mail template or add a custom mail template.
- TIP:** In this case, also change the `VI_MailApproval_ProcessMail` script.
4. Assign the following mail templates to the approval steps.

**Table 65: Mail templates for approval by mail**

Property	Mail template
Mail template request	IT Shop request - approval required (by mail)
Mail template reminder	IT Shop request - remind approver (by mail)
Mail template delegation	IT Shop request - delegated/additional approval (by mail)
Mail template rejection	IT Shop request - reject approval (by mail)

5. In the Designer, configure and enable the **Processes IT Shop mail approvals** schedule.

Based on this schedule, One Identity Manager regularly checks the mailbox for new approval mails. The mailbox is checked every 15 minutes. You can change how frequently it checks, by altering the interval in the schedule as required.

### *To clean up a mail box*

- In the Designer, set the **QER | ITShop | MailApproval | DeleteMode** configuration parameter and select one of the following values.
  - **HardDelete**: The processed email is immediately deleted.
  - **MoveToDeletedItems**: The processed email is moved to the **Deleted objects** mailbox folder.
  - **SoftDelete**: The processed email is moved to the Active Directory recycling bin and can be restored if necessary.

**NOTE:** If you use the **MoveToDeletedItems** or **SoftDelete** cleanup method, you should empty the **Deleted objects** folder and the Active Directory recycling bin on a regular basis.

### **Related topics**

- [Editing approval emails](#) on page 181
- [Custom mail templates for notifications](#) on page 220
- [Demanding an approval decision](#) on page 169
- [Reminding approvers](#) on page 169
- [Delegating approvals](#) on page 175
- [Rejecting approvals](#) on page 175
- [Preparing the IT Shop for multi-factor authentication](#) on page 56

## **Editing approval emails**

The **Processes IT Shop mail approvals** schedule starts the VI\_ITShop\_Process Approval Inbox process. This process runs the VI\_MailApproval\_ProcessInBox script, which searches the mailbox for new approval decision mails and updates the request procedures in the One Identity Manager database. The contents of the approval decision mail are processed at the same time.

**NOTE:** The validity of the email certificate is checked with the VID\_ValidateCertificate script. You can customize this script to suit your security requirements. Take into account that this script is also used for attestations by email.

If an self-signed root certification authority is used, the user account under which the One Identity Manager Service is running, must trust the root certificate.

**TIP:** The VI\_MailApproval\_ProcessInBox script finds the Exchange Web Service URL that uses AutoDiscover through the given mailbox as default. This assumes that the AutoDiscover service is running.

If this is not possible, enter the URL in the **QER | ITShop | MailApproval | ExchangeURI** configuration parameter.

Approval decision mails are processed with the VI\_MailApproval\_ProcessMail script. The script finds the relevant approval, sets the **Approved** option if approval is granted, and

stores the reason for the approval decision with the request procedures. The approver is found through the sender address. Then the approval decision mail is removed from the mailbox depending on the selected cleanup method.

**NOTE:** If you use a custom mail template for the approval decision mail, check the script and modify it as required. Take into account that this script is also used for attestations by email.

## Allowing approval decisions using the Starling 2FA app

To provide approvers who are temporarily unable to access One Identity Manager tools with the option of making approval decisions on requests, you can set up approval by Starling 2FA app. In this case, approvers are prompted by the Starling 2FA app to grant or deny approval of a request. The Starling 2FA app can also be used for approvals that do not require multi-factor authentication, such as for requesting service items where the **Approval by multi-factor authentication** option is not set.

### Prerequisites

- Multi-factor authentication with Starling Cloud is configured.
- Approvers are registered with Starling Two-Factor Authentication.

For detailed information, see the *One Identity Manager Authorization and Authentication Guide*.

### To use the Starling 2FA app for approval decisions

- In the Designer, set the **QER | Person | Starling | UseApprovalAnywhere** configuration parameter.

The approver must make the approval decision within 5 minutes. If this time is exceeded, the Web Portal must be used to approve the request.

### To change the timeout

- In the Designer, set the **QER | Person | Starling | UseApprovalAnywhere | SecondsToExpire** configuration parameter and adjust the value. Enter a timeout in seconds.

### Related topics

- [Preparing the IT Shop for multi-factor authentication](#) on page 56

# Requests with limited validity period for changed role memberships

If an employee changes their primary department (business role, cost center, or location), they lose all company resources and system entitlements inherited through it. However, it may be necessary for the employee to retain these company resources and system entitlements for a certain period. Use temporary requests to retain the state of the employee's current memberships. Inherited assignments are not removed until after the validity period for this request has expired. The employee can renew the request with the validity period.

## Prerequisites

- Employee main data is modified by import.
- The import sets the session variable `FullSync=TRUE`.

## To configure automatic requests for removal of role memberships

1. In the Designer, set the **QER | ITShop | ChallengeRoleRemoval** configuration parameter.
2. In the Designer, set the **QER | ITShop | ChallengeRoleRemoval | DayOfValidity** configuration parameter and enter a validity period for the request.
3. In the Designer, set the configuration parameters under **QER | ITShop | ChallengeRoleRemoval** for roles whose primary memberships need to remain intact when modified.
4. Commit the changes to the database.

**NOTE:** The configuration parameters are set by default. The validity period is set to seven days.

If employee main data is modified by importing, One Identity Manager checks if a primary role (for example `Person.UID_Department`) was modified or deleted on saving. If this is the case, `VI_CreateRequestForLostRoleMembership` is run. The script creates a temporary assignment request for this role, which is granted approval automatically. Thus, the employee remains a member of the role and retains their company resources and system entitlements. The request is automatically canceled when the validity period expires.

The request can be renewed during the validity period. The request renewal must be approved by the role manager. The request becomes permanent if approval is granted. Role membership stays the same until the assignment is canceled.

**TIP:** The **QER | ITShop | ChallengeRoleRemoval | ITShopOrg** configuration parameter specifies which product nodes to use for a limited validity period request of modified role memberships. The **Challenge loss of role membership** product is available by default in the **Identity & Access Lifecycle | Identity Lifecycle** shelf. You can also add this product to your own IT Shop solution.

### *To use the "Challenge loss of role membership" product in your own IT Shop*

1. Assign the **Challenge loss of role membership** assignment resource to one of your own shelves.
2. In the Designer, edit the value of the **QER | ITShop | ChallengeRoleRemoval | ITShopOrg** configuration parameter.
  - Enter the full name or the UID of the new product node.

### Related topics

- [Configuration parameters for the IT Shop](#) on page 235

## Requests from permanently inactive employees

By default, permanently deactivated employees remain members in all the customer nodes. This ensures that all pending request and resulting assignments are retained. One Identity Manager can be configured such that employees are automatically removed from all custom nodes once they are permanently deactivated. This means that all pending requests are broken off and remaining assignments are removed.

### *To remove employees from all customer nodes if they are permanently deactivated*

- In the Designer, set the **QER | ITShop | AutoCloseInactivePerson** configuration parameter.

## Deleting requests

To limit request procedures in the One Identity Manager database, you can remove closed request procedures from the database. The request procedure properties are logged in the approval history at the same time. The requests are subsequently deleted. Only closed requests with unexpired retention periods are kept in the database.

If the request to be deleted still contains dependent requests, the request is only deleted after the dependent requests have been deleted. Dependent requests are requests that are entered into `PersonWantsOrg.UID_PersonWantsOrgParent`.



### ***To delete requests automatically***

1. In the Designer, set the **QER | ITShop | DeleteClosed** configuration parameter.
  - a. To delete canceled requests, set the **QER | ITShop | DeleteClosed | Aborted** configuration parameter and set the retention period in days.
  - b. To delete denied requests, set the **QER | ITShop | DeleteClosed | Dismissed** configuration parameter and set the retention period in days.
  - c. To delete canceled requests, set the **QER | ITShop | DeleteClosed | Unsubscribed** configuration parameter and specify its retention period in days.
2. In the Designer, set the **Common | ProcessState | PropertyLog** configuration parameter and compile the database.

If you disable the configuration parameter at a later date, model components and scripts that are not longer required, are disabled. SQL procedures and triggers are still carried out. For more information about the behavior of preprocessor relevant configuration parameters and conditional compiling, see the *One Identity Manager Configuration Guide*.

This activates logging for deleted request procedures and their approval history. For more detailed information about logging data changes, see the *One Identity Manager Configuration Guide*.

**INFORMATION:** Ensure that the recorded request procedures are archived for audit reasons. For more detailed information about the archiving process, see the *One Identity Manager Data Archiving Administration Guide*.

Closed requests are deleted by the DBQueue Processor once the request's retention period has expired. As the basis for calculating the retention period, the request's cancellation date is used. If this date cannot be given, the time at which the request was last changed, is used. The DBQueue Processor determines the requests to be deleted in the context of daily maintenance tasks. All request procedure properties are logged in the approval history.

## Managing an IT Shop

Depending on your company structure, you can use the supplied default shop, **Identity & Access Lifecycle**, and extend it or set up your own IT Shop solution. Set up different IT Shop structures for your custom IT Shop solution. Specify which employees are authorized to make request in the shops.

***To set up an IT Shop solution with the help of the IT Shop Wizard.***

- In the Manager, select the **My One Identity Manager > IT Shop wizards > Create shop** category.

The wizard includes the most important configuration stages for setting up an IT Shop. After completing the wizard, there may be other configuration steps necessary.

IT Shop structures such as shopping centers, shops, and shelves are mapped in the **IT Shop > IT Shop** category. An IT Shop solution is displayed hierarchically.

The following sections describe the procedure for manually setting up an IT Shop.

### IT Shop base data

Various base data is required to construct an IT Shop:

- Processing status

Processes statuses pass on the status of single approval steps. You can set the processing status for each approval step in the approval workflow depending on whether the approval decision was negative or positive. Depending on the result of the approval decision, the appropriate processing status is set for the request.

For more information, see [Processing status](#) on page 188.

- Standard reasons

Standard reasons are predefined reasons that can be selected in the Web Portal when making approval decisions.

For more information, see [Standard reason for requests](#) on page 189.

- Approval policies

One Identity Manager uses approval policies to determine the approver for each request process.

For more information, see [Approval policies for requests](#) on page 80.

- Approval workflows

Approval workflows define all the necessary steps for making approval decisions for request processes.

For more information, see [Approval workflows for requests](#) on page 84.

- Approval procedure

Approval procedures are used to find the approvers required for an approval step.

For more information, see [Setting up approval procedures](#) on page 115.

- Mail templates

Mail templates are used to send email messages to requesters and approvers.

For more information, see [Custom mail templates for notifications](#) on page 220.

- Role classes

Use role classes to specify which company resources can be requested through the IT Shop. At the same time, you decide which company resources may be assigned as products to shelves and IT Shop templates.

For more information, see [Role classes for the IT Shop](#) on page 191.

- Role types

Role types are used to group roles into a role class. Within the IT Shop, role types can be used to group shop and to restrict the effective approval policies for a shelf.

For more information, see [Role types for the IT Shop](#) on page 192.

- Business Partners

In One Identity Manager, you can enter the data for external businesses that could be act as manufacturers, suppliers, or partners. You assign a manufacturer to a service item.

For more information, see [Business partners](#) on page 192.

- Functional areas

To analyze rule checks for different areas of your company in the context of identity audit, you can set up functional areas. Moreover, functional areas can be replaced by peer group analysis during request approvals or attestation cases. Functional areas can be assigned to service items.

For more information, see [Functional areas](#) on page 194.

- Service categories

Service categories are used to group service items and make them available in the Web Portal.

For more information, see [Entering service categories](#) on page 35.

- Tags

Product owners are able to add tags to their products. These tags can be used as search criteria by requests in the Web Portal.

For more information, see [Entering tags](#) on page 50.

- Request properties

Requests can be given additional information through product-specific request properties such as the specific details of a product, its size, or color. A request property gathers all additional features together that can be given when requesting a product.

For more information, see [Entering product-specific request properties](#) on page 39.

- Chief approval team

There is a default application role in One Identity Manager for the chief approval team. Assign employees to this application role, who are authorized to approve, deny, cancel requests, or to authorize other approvers in special cases.

For more information, see [Chief approval team](#) on page 195.

- Product owners

A default application role for product owners is available in One Identity Manager. Assign the employees to this application role, who are authorized to approve requests and edit the main data of service items or service categories.

For more information, see [Product owners](#) on page 196.

- Attestors


A default application role for attestors is available in One Identity Manager. Assign the employees to this application role, who are authorized to attest IT Shop structures.

For more information, see [Attestors](#) on page 197.

## Processing status

Processes statuses pass on the status of single approval steps. You can set the processing status for each approval step in the approval workflow depending on whether the approval decision was negative or positive. Depending on the result of the approval decision, the appropriate processing status is set for the request.

### ***To edit processing statuses***

1. In the Manager, select the **IT Shop > Basic configuration data > Processing status** category.
2. In the result list, select a processing status and run the **Change main data** task.
  - OR -
  - Click  in the result list.

3. Edit the processing status's main data.
4. Save the changes.

Enter the following properties for a processing status.

**Table 66: General main data of a processing status**

Property	Description
Processing status	Name of the processing status.
Success	The processing status marks the success of the processing step.
Closed	The processing status marks whether processing is complete.
Sort order	Order in which processing status can be set.
Description	Text field for additional explanation.

### Related topics


- [Properties of an approval step](#) on page 89

## Standard reason for requests

For requests or the approval of requests, you can specify reasons in the Web Portal that explain the request sequence and the individual approval decisions. You can freely formulate this text. You also have the option to predefine reasons. The approvers can select a suitable text from these standard reasons in the Web Portal and store it with the request.

Standard reasons are displayed in the approval history and the request details.

### ***To create or edit standard reasons***

1. In the Manager, select the **IT Shop > Basic configuration data > Standard reasons** category.
2. Select a standard reason in the result list and run the **Change main data** task.  
- OR -  
Click  in the result list.
3. Edit the main data of a standard reason.
4. Save the changes.

Enter the following properties for the standard reason.

**Table 67: General main data of a standard reason**

Property	Description
Standard reason	Reason text as displayed in the Web Portal and in the approval history.
Description	Text field for additional explanation.
Automatic Approval	<p>Specifies whether the reason text is only used for automatic approvals by One Identity Manager. This standard reason cannot be selected by manual approvals in the Web Portal.</p> <p>Do not set the option if the you want to select the standard reason in the Web Portal.</p>
Additional text required	Specifies whether an additional reason should be entered in free text for the approval.
Usage type	Usage type of standard reason. Assign one or more usage types to allow filtering of the standard reasons in the Web Portal.

## Related topics

- [Predefined standard reasons for requests](#) on page 190

# Predefined standard reasons for requests

One Identity Manager provides predefined standard reasons. These are added to the request by One Identity Manager during automatic approval. You can use the usage type to specify which standard reasons can be selected in the Web Portal.

## *To change the usage type*

1. In the Manager, select the **IT Shop > Basic configuration data > Standard reasons > Predefined** category.
2. Select the standard reason whose usage type you want to change.
3. Select the **Change main data** task.
4. In the **Usage type** menu, set all the actions where you want to display the standard reason in the Web Portal.  
Unset all the actions where you do not want to display the default reason.
5. Save the changes.

## Related topics

- [Standard reason for requests](#) on page 189

# Role classes for the IT Shop

Role classes form the basis for mapping IT Shop structures in One Identity Manager. The following role classes are available by default in One Identity Manager:

- IT Shop structure
- IT Shop template (if the **QER | ITShop | Templates** configuration parameter is set)

Use role classes to specify which company resources can be requested through the IT Shop. At the same time, you decide which company resources may be assigned as products to shelves and IT Shop templates.

The following options define which company resources may be assigned to IT Shop structures and IT Shop templates:

- Assignments allowed  
This option specifies whether the assignment of the relevant company resources is permitted in general.
- Direct assignments allowed  
This option specifies whether the relevant company resources can be directly assigned.

**NOTE:** Company resources are always assigned directly to shelves and IT Shop templates. Therefore, always enable and disable both options.

## *To configure assignment to IT Shop structures and IT Shop templates*


1. In the Manager, select the **IT Shop > Basic configuration data > Role classes** category.
  2. In the result list, select the role class.
  3. Select the **Configure role assignments** task.
  4. In the **Role assignments** column, select a company resource.  
Enable the **Assignments permitted** option, to specify whether an assignment is generally allowed.  
Enable the **Direct assignment permitted** options, to specify whether a direct assignment is allowed.  
Disable the options if the assignment is not allowed.
- INFORMATION:** You can only disable the options if there are no assignments of the respective objects to IT Shop structures or IT Shop templates.
5. Save the changes.

# Role types for the IT Shop

Create role types in order to classify roles. You can use role types to limit the approval policies in effect for shelves. To do this, assign role types to shelves and approval policies.

You can also assign role types to shops if you want to apply further criteria to distinguish between shops. Role types for shops do not, however, influence how the approval policies in effect are determined.

## **To edit a role type**

1. In the Manager, select the **IT Shop | Basic configuration data | Role types**.
2. In the result list, select the role type and run the **Change main data** task.
  - OR -
  - Click  in the result list.
3. Enter a name and detailed description for the role type.
4. Save the changes.


## **Related topics**

- [Determining the effective approval policies](#) on page 97

# Business partners

In One Identity Manager, you can enter the data for external businesses that could be act as manufacturers, suppliers, or partners. You assign a manufacturer to a service item.

## **To edit business partners**

1. In the Manager, set the **IT Shop | Basic configuration data | Business partners**.
2. In the result list, select a business partner and run the **Change main data** task.
  - OR -
  - Click  in the result list.
3. Edit the business partner's main data.
4. Save the changes.

Enter the following data for a company.


**Table 68: General main data of a company**

Property	Description
Company	Short description of the company for the views in One Identity Manager



Property	Description
	tools.
Name	Full company name.
Surname prefix	Additional company name.
Short name	Company's short name.
Contact	Contact person for the company.
Partner	Specifies whether this is a partner company.
Customer number	Customer number at the partner company.
Supplier	Specifies whether this is a supplier.
Customer number	Customers number at supplier.
Leasing partner	Specifies whether this is a leasing provider or rental firm.
Manufacturer	Specifies whether this is a manufacturer.
Remarks	Text field for additional explanation.

**Table 69: Company address**

Property	Description
Street	Street or road.
Building	Building
Zip code	Zip code.
City	City.
State	State.
Country	Country.
Phone	Company's telephone number.
Fax	Company's fax number.
Email address	Company's email address.
Website	Company's website. Click the  button to display the web page in the default web browser.

# Functional areas

To analyze rule checks for different areas of your company in the context of identity audit, you can set up functional areas. Functional areas can be assigned to hierarchical roles and service items. You can enter criteria that provide information about risks from rule violations for functional areas and hierarchical roles. To do this, you specify how many rule violations are permitted in a functional area or a role. You can enter separate assessment criteria for each role, such as a risk index or transparency index.


Moreover, functional areas can be replaced by peer group analysis during request approvals or attestation cases.

## Example: Use of functional areas

To assess the risk of rule violations for service items. Proceed as follows:

1. Set up functional areas.
2. Assign service items to the functional areas.
3. Specify the number of rule violations allowed for the functional area.
4. Assign compliance rules required for the analysis to the functional area.
5. Use the One Identity Manager report function to create a report that prepares the result of rule checking for the functional area by any criteria.

## To create or edit a functional area

1. In the Manager, select the **IT Shop > Basic configuration data > Functional areas** category.
2. In the result list, select a function area and run the **Change main data** task.  
- OR -  
Click  in the result list.
3. Edit the function area main data.
4. Save the changes.

Enter the following data for a functional area.

**Table 70: Functional area properties**

Property	Description
Functional area	Description of the functional area
Parent Functional area	Parent functional area in a hierarchy. Select a parent functional area from the list for organizing your functional areas hierarchically.

Property	Description
Max. number of rule violations	List of rule violation valid for this functional area. This value can be evaluated during the rule check.  <b>NOTE:</b> This property is available if the Compliance Rules Module is installed.
Description	Text field for additional explanation.

## Related topics

- [Approval by peer group analysis](#) on page 137

# Chief approval team

Sometimes, approval decisions cannot be made for requests because the approver is not available or does not have access to One Identity Manager tools. To complete these requests, you can define a chief approval team whose members are authorized to intervene in the approval process at any time.

There is a default application role in One Identity Manager for the chief approval team. Assign this application role to all employees who are authorized to approve, deny, cancel requests in special cases, or to authorize other approvers. For detailed information about application roles, see the *One Identity Manager Authorization and Authentication Guide*.

**Table 71: Default application role for chief approval team**

User	Tasks
Chief approval team	Chief approvers must be assigned to the <b>Request &amp; Fulfillment   IT Shop   Chief approval team</b> application role. Users with this application role: <ul style="list-style-type: none"> <li>• Approve through requests.</li> <li>• Assign requests to other approvers.</li> </ul>


## To add members to the chief approval team

1. In the Manager, select the **IT Shop > Basic configuration data > Chief approval team** category.
2. Select the **Assign employees** task.

In the **Add assignments** pane, assign the employees who are authorized to approve all requests.

**TIP:** In the **Remove assignments** pane, you can remove the assignment of employees.

### **To remove an assignment**

- Select the employee and double-click .
3. Save the changes.

## **Detailed information about this topic**

- [Approval by the chief approval team](#) on page 148

# **Product owners**

Employees who are approvers in approval processes for requesting service items can be assigned to these service items. To do this, assign a service item or a service category to an application for **Product owners**. Assign employees to this application role who are authorized to approve requests in the IT Shop and to edit service item or service category main data.

A default application role for product owners is available in One Identity Manager. You may create other application roles as required. For detailed information about application roles, see the *One Identity Manager Authorization and Authentication Guide*.

**Table 72: Default application roles for product owners**

User	Tasks
Product owners	<p>Product owners must be assigned to the <b>Request &amp; Fulfillment   IT Shop   Product owners</b> application role or a child application role.</p> <p>Users with this application role:</p> <ul style="list-style-type: none"><li>• Approve through requests.</li><li>• Edit service items and service categories under their management.</li></ul>


### **To add employees to the default application role for product owners**

1. In the Manager, select the **IT Shop > Basic configuration data > Product owners** category.
2. Select the **Assign employees** task.


In the **Add assignments** pane, add employees.

**TIP:** In the **Remove assignments** pane, you can remove employee assignments.

### **To remove an assignment**

- Select the employee and double-click .
3. Save the changes.

### To add another application role for product owners

1. In the Manager, select the **IT Shop > Basic configuration data > Product owners** category.
2. Click  in the result list.
3. Enter at least the application role's name and, in the **Parent application role** menu, select the **Request & Fulfillment | IT Shop | Product owners** application role or a child role.
4. Save the changes.
5. Assign employees to the application role.

### Related topics

- [Deleting unused application roles for product owners](#) on page 78

## Attestors

**NOTE:** This function is only available if the Attestation Module is installed.

In One Identity Manager, you can assign employees, who are brought in as attestors to attest these objects, to IT Shop structures (shelves, shops, shopping centers, service categories, and shelf templates). To do this, assign the IT Shop structures to application roles for attestors. Assign these application roles to employees who are authorized to attest these objects and their assignments.

For detailed information about attestation, see the *One Identity Manager Attestation Administration Guide*.

A default application role for attestors is available in One Identity Manager. You may create other application roles as required. For detailed information about application roles, see the *One Identity Manager Authorization and Authentication Guide*.

**Table 73: Default application roles for attestors**

User	Tasks
Attestors for IT Shop	<p>Attestors must be assigned to the <b>Request &amp; Fulfillment   IT Shop   Attestors</b> application role.</p> <p>Users with this application role:</p> <ul style="list-style-type: none"><li>• Attest correct assignment of company resource to IT Shop structures for which they are responsible.</li><li>• Attest objects that have service items assigned to them.</li><li>• Can view main data for these IT Shop structures but not edit them.</li></ul> <p><b>NOTE:</b> This application role is available if the Attestation Module is installed.</p>


### ***To add employees to default application roles for attestors***

1. In the Manager, select the **IT Shop > Basic configuration data > Attestors** category.
2. Select the **Assign employees** task.


In the **Add assignments** pane, add employees.

**TIP:** In the **Remove assignments** pane, you can remove employee assignments.

#### ***To remove an assignment***

- Select the employee and double-click .
3. Save the changes.

### ***To add another application role for attestors***

1. In the Manager, select the **IT Shop > Basic configuration data > Attestors** category.
2. Click  in the result list.
3. Enter at least the application role's name and, in the **Parent application role** menu, select the **Request & Fulfillment | IT Shop | Attestor** application role or a child role.
4. Save the changes.
5. Assign employees to the application role.

### **Related topics**

- [General main data of a service item](#) on page 23
- [Service category main data](#) on page 36
- [General main data of IT Shop structures](#) on page 199
- [General main data of a shelf template](#) on page 214

## **Setting up IT Shop structures**

Depending on the company structure, you can optionally define shopping centers for your IT Shop solution where several shops can be bought together under one roof. Always add the shopping center to the top level of the IT Shop. Shopping centers may not be hierarchical.

Each shop contains a number of shelves that the customer can request products from. You can add a shop to the top level of the IT Shop or under a shopping center. Shops may not be hierarchical.

There are various products available for request on shelves. Shelves are set up under each shop.

**IMPORTANT:** If a shop contains a large number of customers, the calculations in the IT Shop can cause a heavy load on the DBQueue Processor and therefore on the database server, as well.


Structure the IT Shop so that no more than 30,000 customers can make requests in each shop. If necessary, set up your own shopping center with several shops and customer nodes.

### Detailed information about this topic

- [Adding IT Shop structures](#) on page 199
- [Additional tasks for IT Shop structures](#) on page 202
- [Deleting IT Shop structures](#) on page 208

## Adding IT Shop structures

### *To set up a shopping center, a shop or a shelf*

1. In the Manager, select the **IT Shop > IT Shop** category.
2. Click  in the result list.
3. Edit the shopping center, shop, or shelf's main data.
4. Save the changes.

### Detailed information about this topic

- [General main data of IT Shop structures](#) on page 199
- [Custom main data of IT Shop structures](#) on page 201

## General main data of IT Shop structures


On the **General** tab, enter the following main data of a shopping center, shop, or a shelf.

**Table 74: General main data of an IT Shop structure**

Property	Description
IT Shop node	IT Shop structure name.
Internal name	Internal IT Shop structure name.
IT Shop information	The structure of the IT Shop is governed by this data The IT Shop structure is regulated by this data. In the menu, select <b>Shopping center, Shop</b> , or

Property	Description
	<b>Shelf.</b> The menu is only displayed when you insert a new IT Shop structure.
Role type	Role types for classifying shops and shelves. In the menu, select a role type. <ul style="list-style-type: none"> <li>Shopping center: N/A</li> <li>Shop: You can use role types to classify shops further. The role type for shops does not influence how the approval policies in effect are determined.</li> <li>Shelf: You can use role types to limit the approval policies in effect.</li> </ul>
Shelf template	Template to automatically fill shelves. <ul style="list-style-type: none"> <li>Shopping center: Select a shopping center template from the menu. A shopping center template cannot be assigned until the shopping center has been saved in the database.</li> <li>Shop: N/A</li> <li>Shelf: For shelves created by automatic filling of the shop, the reference to the shelf template used is entered. Shelf templates are only assigned automatically.</li> </ul>
Parent IT Shop node	Parent IT Shop nodes in the IT Shop hierarchy. <ul style="list-style-type: none"> <li>Shopping center: Leave this empty. Shopping centers always form the root node of an IT Shop.</li> <li>Shop: If the shop is at the top level of an IT Shop, this field stays empty. If the shop is in a shopping center, select the shopping center from the menu. You can use this input field to add shops to shopping centers later.</li> <li>Shelf: In the menu, select the shop to add the shelf to. After saving the rule, the shop cannot be changed again.</li> </ul>
Full name	Full name of the IT Shop structure.
Location	Location of the IT Shop structure. You can use this input when creating approval policies for making requests from this shopping center/shop/shelf.
Department	Department the IT Shop structure is in. You can use this input when creating approval policies for making requests from this shopping center/shop/shelf.
Cost center	Cost enter of the IT Shop structure. You can use this input when creating approval policies for making requests from this shopping



Property	Description
	center/shop/shelf.
Owner	The employee responsible for the IT Shop structure. You can use this input when creating approval policies for making requests from this shopping center/shop/shelf.
2nd Manager	The owner's deputy. You can use this input when creating approval policies for making requests from this shopping center/shop/shelf.
Attestors	<p>Applications role whose members are authorized to approve attestation cases for this IT Shop structure.</p> <p>To create a new application role, click . Enter the application role name and assign a parent application role.</p> <p><b>  NOTE:</b> This property is available if the Attestation Module is installed.</p>
Description	Text field for additional explanation.
Certification status	<p>Certification status of the IT Shop structure. You can select the following certification statuses:</p> <ul style="list-style-type: none"> <li>• <b>New:</b> The IT Shop structure was newly added to the One Identity Manager database.</li> <li>• <b>Certified:</b> The IT Shop structure's main data was granted approval by the manager.</li> <li>• <b>Denied:</b> The IT Shop structure's main data was denied approval by the manager.</li> </ul>

### Detailed information about this topic

- [Role types for the IT Shop](#) on page 192
- [Templates for automatically filling the IT Shop](#) on page 210
- [Attestors](#) on page 197

### Related topics

- [Determining the effective approval policies](#) on page 97

## Custom main data of IT Shop structures

Additional company-specific information. Use the Designer to customize display names, formats, and templates for the input fields.

# Additional tasks for IT Shop structures

After you have entered the main data, you can run the following tasks.

## The IT Shop structure overview

### *To obtain an overview of a shopping center*

1. In the Manager, select the **IT Shop > IT Shop** category.
2. Select the shopping center template in the result list.
3. Select the **Shopping center overview** task.

### *To obtain an overview of a shop*

1. In the Manager, select the **IT Shop > IT Shop** or the **IT Shop > IT Shop > <shopping center>** category.
2. Select the shop in the result list.
3. Select the **Shop overview** task.

### *To obtain an overview of a shelf*

1. In the Manager, select the **IT Shop > IT Shop > <shop>** or the **IT Shop > IT Shop > <shopping center> > <shop>** category.
2. Select the shelf in the result list.
3. Select the **Shelf overview** task.

## Assigning approval policies

You can assign approval policies to a shopping center, shops, and shelves. These are applied to all request from this IT Shop structure if a child IT Shop structure or the requested service items are not assigned to approval policies. The approval policy that takes effect on the IT Shop structure is shown in the overview.

### *To assign an IT Shop structure to an approval policy.*

1. In the Manager, select the **IT Shop > IT Shop** or the **IT Shop > IT Shop > <IT Shop Structure>** category.
2. Select the IT Shop structure in the result list.
3. Select the **Assign approval policies** task.

In the **Add assignments** pane, assign the approval policies.

**TIP:** In the **Remove assignments** pane, you can remove approval policy assignments.

**To remove an assignment**

- Select the approval policy and double-click ✓.
4. Save the changes.

## Related topics

- [Approval processes for IT Shop requests](#) on page 80

## Assigning requestable products to shelves

Assign a shelf those company resources that the shop customers are permitted to request as products. These company resources are added as product nodes below the shelf. You can only select those company resources that are labeled with the **IT Shop** option and to which a service item is assigned.

To assign company resources, select one of the tasks in the task view. The tasks are only shown if the **Assignments permitted** and **Direct assignment permitted** options are enabled for the **IT Shop structure** role class.

**To assign company resources as products to a shelf**

1. In the Manager, select the **IT Shop > IT Shop > <shop>** or the **IT Shop > IT Shop > <shopping center> > <shop>** category.
2. Select the shelf in the result list.
3. Select the **Assign <company resource>** task.

In the **Add assignments** pane, assign company resources..

**TIP:** In the **Remove assignments** pane, you can remove company assignments.

**To remove an assignment**

- Select the company resource and double-click ✓.
4. Save the changes.

## Related topics

- [Preparing products for requesting](#) on page 21
- [Assigning and removing products](#) on page 51
- [Role classes for the IT Shop](#) on page 191

# Setting up a customer node


Set up only one customer node for each shop to facilitate customer administration. Add the employees to this customer node who are permitted to request products from this shop.

**IMPORTANT:** If a shop contains a large number of customers, the calculations in the IT Shop can cause a heavy load on the DBQueue Processor and therefore on the database server, as well.

Ensure that no more than 30,000 employees are members in a customer node. If necessary, set up your own shopping center with several shops and customer nodes.

## Adding customer nodes

### To set up a customer node

1. In the Manager, select the **IT Shop > IT Shop > <shop>** or the **IT Shop > IT Shop > <shopping center> > <shop>** category.
2. Click  in the result list.
3. Edit the customer node's main data.
4. Save the changes.

## General main data of customer nodes

Enter the following main data of a customer node:

**Table 75: General main data of a customer node**

Property	Description
IT Shop node	IT Shop structure name.
Internal name	Internal IT Shop structure name.
IT Shop information	Labels the IT Shop structure as customer node. In the menu, select <b>Customers</b> . The menu is only displayed when you insert a new IT Shop structure.
Role type	Not relevant
Shelf template	N/A.

Property	Description
Parent IT Shop node	Parent IT Shop nodes in the IT Shop hierarchy. Select the shop to which the customer node will be added. Only one customer node is allowed per shop.
Full name	Full identifier of the customer node.
Location	N/A.
Department	N/A.
Cost center	N/A.
Owner	N/A.
Deputy manager	N/A.
Attestors	N/A.
Description	Text field for additional explanation.
Dynamic roles not allowed	Specifies whether a dynamic role can be created for the customer node.

### Related topics

- [Assigning employees through dynamic roles](#) on page 206

## Custom main data of customer nodes

Additional company-specific information. Use the Designer to customize display names, formats, and templates for the input fields.

## Additional tasks for customer nodes

After you have entered the main data, you can run the following tasks.

## The entitled customers overview

### *To obtain an overview of a customer node*

1. In the Manager, select the **IT Shop > IT Shop > <shop> > Customers** or **IT Shop > IT Shop > <shopping center> > <shop> > Customers** category.
2. Select the **Entitled customers overview** task.

## Assigning employees directly

Add an employee who is authorized to make requests for the shop to the customer node. You have two possible ways of doing this. Employees can be assigned to a customer node either directly or through a dynamic role.

**IMPORTANT:** If a shop contains a large number of customers, the calculations in the IT Shop can cause a heavy load on the DBQueue Processor and therefore on the database server, as well.

Never assign more than 30,000 employees to a customer node.


### *To assign employees directly to a custom node*

1. In the Manager, select the **IT Shop > IT Shop > <shop> > Customers** or **IT Shop > IT Shop > <shopping center> > <shop> > Customers** category.
2. Select the **Assign employees** task.

In the **Add assignments** pane, assign the employees authorized to make requests.

**TIP:** In the **Remove assignments** pane, you can remove assigned employees.

#### **To remove an assignment**

- Select the employee and double-click .
3. Save the changes.

If an employee is removed from a customer node, all pending requests for this employee are canceled.

### **Related topics**

- [Assigning employees through dynamic roles](#) on page 206

## Assigning employees through dynamic roles

Add an employee who is authorized to make requests for the shop to the customer node. You have two possible ways of doing this. Employees can be assigned to a customer node either directly or through a dynamic role.

**NOTE:** **Create dynamic role** is only available for customer nodes that do not have **Dynamic roles not allowed** set.

**IMPORTANT:** If a shop contains a large number of customers, the calculations in the IT Shop can cause a heavy load on the DBQueue Processor and therefore on the database server, as well.

Formulate the condition for the dynamic role so that no more than 30,000 employees are found.

### To create a dynamic role

1. In the Manager, select the **IT Shop > IT Shop > <shop> > Customers** or **IT Shop > IT Shop > <shopping center> > <shop> > Customers** category.
2. Select the **Create dynamic role** task.
3. Enter the required main data.
4. Save the changes.

### To edit a dynamic role

1. In the Manager, select the **IT Shop > IT Shop > <shop> > Customers** or **IT Shop > IT Shop > <shopping center> > <shop> > Customers** category.
2. Select the **Entitled customers overview** task.
3. Select the **Dynamic roles** form element and click on the dynamic role.
4. Select the **Change main data** task and edit the dynamic role's main data.
5. Save the changes.


For more information about dynamic roles, see the *One Identity Manager Identity Management Base Module Administration Guide*. The following features apply to dynamic roles for customer nodes:

**Table 76: Properties of a customer node dynamic role**

Property	Description
IT Shop node	This data is initialized with selected customer nodes. If the employee objects meet the dynamic role conditions, they are added to this customer node.
Object class	Employee
Dynamic role	The dynamic role name is made up of the object class and the full name of the IT Shop node by default.
Calculation schedule	<p>Schedule for calculating dynamic roles. Employees with request permissions for the shop are determined regularly at the times specified in the schedule.</p> <p>In the default installation of One Identity Manager, the <b>Dynamic roles check</b> schedule is already defined. All dynamic role memberships are checked using this schedule and recalculation operations are sent to the DBQueue Processor if necessary. Use the Designer to customize schedules or set up new ones to meet your requirements. For more information, see the <i>One Identity Manager Operational Guide</i>.</p>

### To delete a dynamic role

1. In the Manager, select the **IT Shop > IT Shop > <shop> > Customers** or **IT Shop > IT Shop > <shopping center> > <shop> > Customers** category.
2. Select the **Entitled customers overview** task.

3. Select the **Dynamic roles** form element and click on the dynamic role.
4. In the Manager's toolbar, click .
5. Confirm the security prompt with **Yes**.

### Related topics


- [Assigning employees directly](#) on page 206

## Deleting IT Shop structures

In order to delete IT Shop structures, you have to remove all the child IT Shop structures. This applies to manually added IT Shop structures in the same way as it does for shelves and products created from shelf templates.

## Deleting customer nodes

### *To delete a customer node*

1. In the Manager, select the **IT Shop > IT Shop > <shop>** or the **IT Shop > IT Shop > <shopping center> > <shop>** category.
2. Select the customer node in the result list.
3. Remove all assigned employees.
  - If the customer node was filled using a dynamic role, delete the dynamic role first.
4. Click  in the result list.
5. Confirm the security prompt with **Yes**.

### Detailed information about this topic

- [Additional tasks for customer nodes](#) on page 205

## Deleting shelves

If a shelf is going to be completely dissolved, you need to remove all the product assignments from the shelf first.




### ***To delete a shelf***

1. In the Manager, select the **IT Shop > IT Shop > <shop>** or the **IT Shop > IT Shop > <shopping center> > <shop>** category.

2. Select the shelf in the result list.

3. Remove all product assignments to the shelf.

The next time the DBQueue Processor runs, all pending requests for the products are closed and approved requests are canceled. Then you can delete the shelf.

4. Click  in the result list.
5. Confirm the security prompt with **Yes**.

### ***To delete a shelf that resulted from a special shelf template***

1. Cancel approved requests from this shelf.
2. Cancel pending request.
3. Remove shelf template assignments to the shop.

**NOTE:** Shelves that have been created from a global shelf template or a shopping center template cannot be deleted.


### **Detailed information about this topic**

- [Removing products from shelves](#) on page 54
- [Assigning shelf templates to shops and shopping center templates](#) on page 217

## **Deleting shops**

If you want to delete a shop, delete the customer node and existing shelves beforehand.

### ***To delete a shop***

1. In the Manager, select the **IT Shop | IT Shop** or the **IT Shop | IT Shop | <shopping center>** category.
2. Select the shop in the result list.
3. Delete the customer node.
4. Delete all shelves.
5. Click  in the result list.
6. Confirm the security prompt with **Yes**.


### **Detailed information about this topic**

- [Deleting customer nodes](#) on page 208
- [Deleting shelves](#) on page 208

# Deleting shopping centers

If you want to delete a shopping center, delete all shops first.

## *To delete a shopping center*

1. Select the **IT Shop > IT Shop** category.
2. Select the shopping center template in the result list.
3. Delete all shops.
4. Click  in the result list.
5. Confirm the security prompt with **Yes**.

## Detailed information about this topic

- [Deleting shops](#) on page 209

# Templates for automatically filling the IT Shop

You can create templates for setting up shelves automatically. Use templates when you want to set up shelves in several shops or shopping centers with the same products.

**Table 77: Templates overview**

Template	Description
Global shelf templates	<p>A global shelf template is automatically distributed to all shops within the IT Shop solution. A corresponding shelf with products is added to each shop. If a new shop is created within the IT Shop solution, the global shelf template is immediately applied to the shop.</p> <p>  <b>NOTE:</b> Global shelf templates are not distributed to default shops.</p>
Special shelf templates	<p>A special shelf template is manually assigned to one or more shops. A corresponding shelf with products is added in these shops. A special template can be distributed additionally to shopping center templates.</p>
Shopping center templates	<p>A shopping center template references one or more shopping centers. You can only assign shopping center template to shopping center. Once you assign a special shelf template to a shopping center template, a corresponding shelf is added to all the shops in the shopping center.</p>

In order to simplify understanding, these templates are given the umbrella term **shelf templates** in the following.

### **To use shelf templates**

- In the Designer, set the **QER | ITShop | Templates** configuration parameter.


**NOTE:** If you disable the configuration parameter at a later date, model components and scripts that are not longer required, are disabled. SQL procedures and triggers are still carried out. For more information about the behavior of preprocessor relevant configuration parameters and conditional compiling, see the *One Identity Manager Configuration Guide*.

The following is valid for all shelf templates:

- If a template is modified, the changes are passed on to all shelves created from this shelf template.
- If a shelf template is deleted, all the shelves that originated from it are deleted from the shop. Outstanding requests are completed.
- Shelf templates can only be deleted when their assigned products and approval policies have been removed.

The following diagram illustrates the shelf templates that can be set up, their assignments, and the resulting IT Shop solution.

### Figure 12: Assigning shelf templates

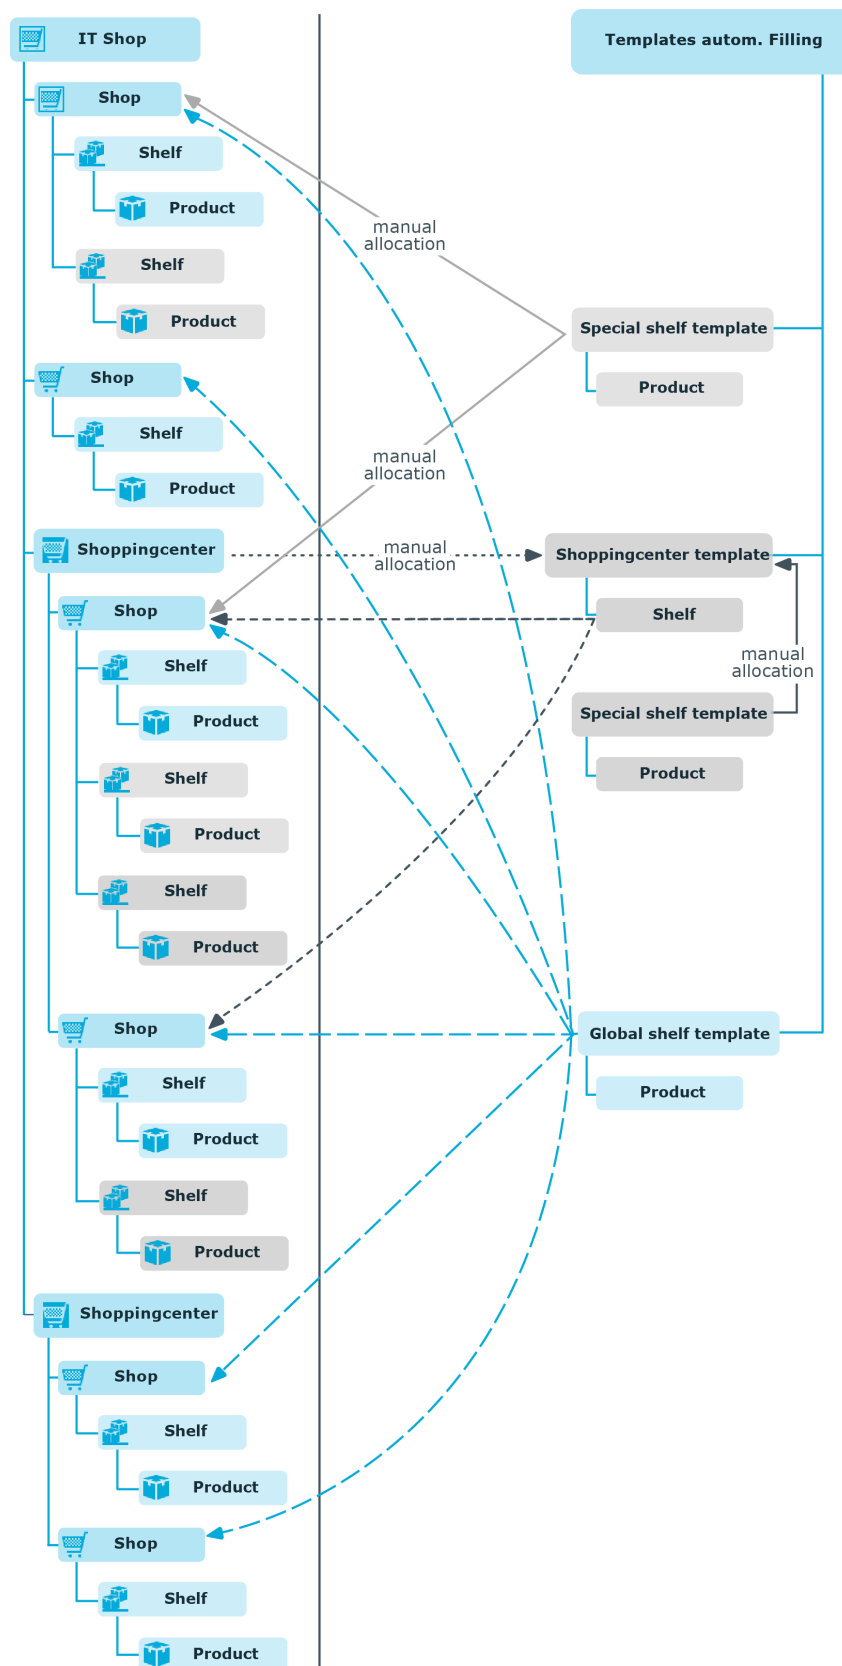

# Using shelf templates in an IT Shop solution

To create different shelf templates and implements in an IT Shop solution, do the following:

## ***Global shelf templates***

1. Create a global shelf template.
2. Assign products and approval policies to global shelf template.

The global shelf template is automatically reproduced in all shops in IT Shop. The shelves that created are linked to the global shelf template from which they originate. The products are transferred from the template to the shelf that is created from the template.

**| NOTE:** Global shelf templates are not distributed to default shops.

## ***Special shelf template***

1. Create a special shelf template.
2. Assign products and approval policies to the special shelf template.
3. Assign the special shelf template to one or more shops.

The special shelf template is automatically copied to all shops in the IT Shop. The shelves that created are linked to the special shelf template from which they originate. The products are transferred from the template to the shelf that is created from the template.

## ***Shopping center template***

1. Create a shopping center template.
2. Create a special shelf template.
3. Assign products and approval policies to the special shelf template.
4. Assign the special shelf template to the shop center template.
5. Assign the shopping center template to the desired shopping centers.


The special shelf template is automatically copied to the shopping center template. Subsequently, the shelf created from the shopping center template is distributed to all the shops in the shopping center. The shelves that are created obtain a link to the shelf that they originated from.

## **Detailed information about this topic**

- [Editing shelf templates](#) on page 214
- [Additional tasks for shelf templates](#) on page 215
- [Assigning shelf templates to shops and shopping center templates](#) on page 217
- [General main data of IT Shop structures](#) on page 199

# Editing shelf templates

## *To edit a shelf template*


1. In the Manager, select the **IT Shop > Shelf templates** category.
2. In the result list, select a mail template in and run the **Change main data** task.  
- OR -  
Click  in the result list.
3. Edit the shelf template's main data.
4. Save the changes.

## General main data of a shelf template

Enter the following properties for a shelf template.

**Table 78: General main data of a shelf template**

Property	Description
IT Shop node	Identifier of the IT Shop structure for creating the shelf template.
Internal name	Internal name of the shelf template.
IT Shop information	Type of shelf template. In the menu, select <b>Shopping center template</b> , <b>Global shelf template</b> , or <b>Shelf template</b> .
Role type	Role types for classifying shops and shelves. In the menu, select a role type. <ul style="list-style-type: none"><li>• Shopping center template: N/A</li><li>• Global and special templates: You can use role types to limit the approval policies in effect. The role type is applied to the new shelf.</li></ul>
Location	Location of the shelf. You can use this data in approval workflows for determining the approver responsible for requests from the shelves that have been created.
Department	Department the shelf belongs to. You can use this data in approval workflows for determining the approver responsible for requests from the shelves that have been created.
Cost center	Cost center of the shelf. You can use this data in approval workflows for determining the approver responsible for requests from the shelves that have been created.

Property	Description
Owner	Employee responsible for the shelf. You can use this data in approval workflows for determining the approver responsible for requests from the shelves that have been created.
Deputy manager	The owner's deputy. You can use this data in approval workflows for determining the approver responsible for requests from the shelves that have been created.
Attestors	<p>Applications role whose members are authorized to approve attestation cases for this business role.</p> <p>To create a new application role, click . Enter the application role name and assign a parent application role.</p> <p><b>  NOTE:</b> This property is available if the Attestation Module is installed.</p>
Description	Text field for additional explanation.
Certification status	<p>The shelf template's certification status. You can select the following certification statuses:</p> <ul style="list-style-type: none"> <li>• <b>New:</b> The shelf template was newly added to the One Identity Manager database.</li> <li>• <b>Certified:</b> A manager granted approval to the shelf template's main data.</li> <li>• <b>Denied:</b> A manager denied approval to the shelf template's main data.</li> </ul>

### Detailed information about this topic

- [Role types for the IT Shop](#) on page 192
- [Attestors](#) on page 197

### Related topics

- [Determining the effective approval policies](#) on page 97

## Custom main data of shelf templates

Additional company-specific information. Use the Designer to customize display names, formats, and templates for the input fields.

## Additional tasks for shelf templates

After you have entered the main data, you can run the following tasks.

# Assigning approval policies

You can assign approval policies to global and special templates. These approval policies are passed on to every new shelf.


## *To assign a shelf template to an approval policy*

1. In the Manager, select the **IT Shop > Shelf templates** category.
2. Select the rule template in the result list.
3. Select the **Assign approval policies** task.

In the **Add assignments** pane, assign the approval policies.

**TIP:** In the **Remove assignments** pane, you can remove approval policy assignments.

### *To remove an assignment*

- Select the approval policy and double-click .
4. Save the changes.

## Related topics

- [Approval processes for IT Shop requests](#) on page 80

# Assigning requestable products to shelf templates

Assign global and special shelf templates to company resources. These company resources are added as product nodes to all the shelves that are created. You can only select those company resources that are labeled with the **IT Shop** option and to which a service item is assigned.

Select one of the tasks in the task view to assign company resources. The tasks are only shown if the **Assignments permitted** and **Direct assignment permitted** options are enabled for the **IT Shop template** role class.

## *To assign company resources as products to a shelf*

1. In the Manager, select the **IT Shop > Shelf templates** category.
2. Select the rule template in the result list.
3. Select the **Assign <company resource>** task.

In the **Add assignments** pane, assign company resources..

**TIP:** In the **Remove assignments** pane, you can remove company assignments.



### **To remove an assignment**

- Select the company resource and double-click ✓.
4. Save the changes.

### **Related topics**

- [Preparing products for requesting](#) on page 21
- [Assigning and removing products](#) on page 51
- [Role classes for the IT Shop](#) on page 191

## **Shelf-filling wizard**

Use this task to assign special shelf templates to shops and shopping centers. For more information, see [Assigning shelf templates to shops and shopping center templates](#) on page 217.

## **Assigning shelf templates to shops and shopping center templates**

Global shelf templates are immediately distributed to all shops. Assign special shelf templates manually to shops and shopping center templates. You also need to assign shopping center templates to the desired shopping center. This assignment takes place in the shopping center.

### **To assign a special shelf template to shops and shopping center templates**

1. In the Manager, select the **IT Shop > Shelf templates** category.
2. Select a shelf template in the result list.
3. Select **Shelf Filling Wizard**.
4. Select **Create/remove shelves**.
5. In the **Shelf template**, select a special shelf template.
6. Enable the shops and shopping center template to which to assign this shelf template.
7. Click **Apply**.

**Table 79: Settings in the shelf filling wizard**

Property	Description
<b>Create/remove shelves</b> tab	This shows shops and shopping centers to which shelf templates can be assigned and removed again.

Property	Description
Shelf template	This list displays all available special shelf templates. By default, the shelf template list is preset with the name of shelf template from which the wizard is started.
Filter	<p>This limits the number of shops and shopping center templates displayed. All entries that contain strings that are entered in the filter condition are displayed. Uppercase and lowercase are not taken into account. The filter takes effect after the shelf template has been reselected in the <b>Shelf templates</b> list.</p> <p>The filter also affects the view on <b>Assignment by shopping center templates</b>.</p>
List of Shops and Shopping Center Templates	<ul style="list-style-type: none"> <li>• To assign a shelf template, select the check box next to the desired shop or shopping center template.</li> <li>• Use <b>Assign all</b> to assign a template to all shops and shopping center templates.</li> <li>• In order to remove the assignments from all shops, click the <b>Remove all</b> button.</li> <li>• You can select several entries at one time (<b>Ctrl + left mouse button</b> or <b>Shift + left mouse button</b>) and change the assignments using the <b>Invert selection</b> button.</li> <li>• Click <b>Apply</b> to save the changes.</li> </ul>
<b>Assignment by shopping center templates</b> tab	<p>Once the DBQueue Processor has calculated the assignments, the shops in which a shelf was created from a shopping center template, are displayed on this tab. This only provides an overview. You cannot edit the assignments.</p> <p>The shops displayed are limited through the filter.</p>


## Related topics

- [General main data of IT Shop structures](#) on page 199

## Deleting shelf templates

If a shelf template is deleted, the **QER | ITShop | Templates | DeleteRecursive** configuration parameter is taken into account. If the configuration parameter is set, you can delete a shelf template without requiring any further steps. When this shelf template is deleted, the shelves and products connected with this template are also deleted from the shops. Pending requests in these shelves are closed; approved requests are canceled. If the parameter is not set, templates cannot be deleted as long as shelves reference it.

### ***To delete shelf templates recursively***

1. In the Designer, set the **QER | ITShop | Templates | DeleteRecursive** configuration parameter.
2. In the Manager, select the **IT Shop > Shelf templates** category.
3. Select a shelf template in the result list.
4. Click  in the result list.

The next time the DBQueue Processor runs, the shelves and products connected with this template are also deleted from the shops. Pending requests from these shelves are closed, approved request are canceled.

If the configuration parameter is not set, proceed as follows to delete the shelf template:

### ***To delete a global shelf template***

1. In the Manager, select the **IT Shop > Shelf templates** category.
2. Select the global shelf template in the result list.
3. Remove all assigned products.
4. Save the changes.

All assignments of these products to shelves are removed when the DBQueue Processor runs the next time. Then, the shelf template can be deleted.

5. Click  in the result list.

All shelves based on this template are deleted when the DBQueue Processor runs the next time.


### ***To delete a special shelf template***

1. In the Manager, select the **IT Shop > Shelf templates** category.
2. Select the special shelf template in the result list.
3. Remove all assigned products.
4. Save the changes.

All assignments of these products to shelves are removed when the DBQueue Processor runs the next time.

5. Remove all assignments of the shelf template to shops and shopping center templates.

All shelves based on this template are deleted when the DBQueue Processor runs the next time.

6. Click  in the result list.

### ***To delete a shopping center template***

1. In the Manager, select the **IT Shop > Shelf templates** category.
2. Select the shopping center template in the result list.
3. Delete all shopping center assignments.

All shelves based on this template are deleted when the DBQueue Processor runs the next time.

4. Delete all special shelf template assignments to the shopping center template.
5. Click  in the result list.

### Detailed information about this topic

- [Assigning requestable products to shelf templates](#) on page 216
- [Assigning shelf templates to shops and shopping center templates](#) on page 217
- [General main data of IT Shop structures](#) on page 199

## Custom mail templates for notifications

Mail templates are used to send email messages to requesters and approvers.

For more information about creating and editing mail template, see the *One Identity Manager Operational Guide*.


A mail template consists of general main data such as target format, importance, or mail notification confidentiality, and one or more mail definitions. Mail text is defined in several languages in the mail template. This ensures that the language of the recipient is taken into account when the email is generated.

### Related topics

- [Notifications in the request process](#) on page 168

## Creating and modifying IT Shop mail templates

### *To create and edit mail templates*

1. In the Manager, select the **IT Shop > Basic configuration data > Mail templates** category.  
The result list shows all the mail templates that can be used for IT Shop requests.
2. Select a mail template in the result list and run the **Change main data** task.  
- OR -  
Click  in the result list.  
This opens the mail template editor.

3. Edit the mail template.
4. Save the changes.



### Detailed information about this topic

- [General properties of mail templates](#) on page 221
- [Creating and editing mail definitions](#) on page 222

## General properties of mail templates

The following general properties are displayed for a mail template.

**Table 80: Mail template properties**

Property	Meaning
Mail template	Name of the mail template. This name will be used to display the mail templates in the administration tools and in the Web Portal. Translate the given text using the  button.
Base object	Mail template base object. A base object only needs to be entered if the mail definition properties of the base object are referenced.  Use the PersonWantsOrg or PW0HelperPW0 base object for notifications in the IT Shop.
Report (parameter set)	Report, made available through the mail template.
Description	Mail template description. Translate the given text using the  button.
Target format	Format in which to generate email notification. Permitted values are: <ul style="list-style-type: none"><li>• <b>HTML:</b> The email notification is formatted in HTML. Text formats, for example, different fonts, colored fonts, or other text formatting, can be included in HTML format.</li><li>• <b>TXT:</b> The email notification is formatted as text. Text format does not support bold, italics, or colored font, or other text formatting. Images displayed directly in the message are not supported.</li></ul>
Design type	Design in which to generate the email notification. Permitted values are: <ul style="list-style-type: none"><li>• <b>Mail template:</b> The generated email notification contains the mail body in accordance with the mail definition.</li><li>• <b>Report:</b> The generated email notification contains the report specified under <b>Report (parameter set)</b> as its mail body.</li><li>• <b>Mail template, report in attachment:</b> The generated email</li></ul>

Property	Meaning
	notification contains the mail body in accordance with the mail definition. The report specified under <b>Report (parameter set)</b> is attached to the notification as a PDF file.
Importance	Importance for the email notification. Permitted values are <b>Low</b> , <b>Normal</b> , and <b>High</b> .
Confidentiality	Confidentiality for the email notification. Permitted values are <b>Normal</b> , <b>Personal</b> , <b>Private</b> , and <b>Confidential</b> .
Can unsubscribe	Specifies whether the recipient can unsubscribe email notification. If this option is set, the emails can be unsubscribed through the Web Portal.
Deactivated	Specifies whether this mail template is disabled.
Mail definition	Selects the mail definition in a specific language.  <b>NOTE:</b> If the <b>Common   MailNotification   DefaultCulture</b> configuration parameter is set, the mail definition is loaded in the default language for email notifications when the template is opened.
Language	Language that applies to the mail template. The recipient's language preferences are taken into account when an email notification is generated.
Subject	Subject of the email message.
Mail body	Content of the email message.

## Creating and editing mail definitions

Mail texts can be defined in these different languages in a mail template. This ensures that the language of the recipient is taken into account when the email is generated.

### To create a new mail definition

1. In the Manager, select the **IT Shop > Basic configuration data > Mail templates** category.  
The result list shows all the mail templates that can be used for IT Shop requests.
2. Select a mail template in the result list and run the **Change main data** task.
3. In the result list, select the language for the mail definition in the **Language** menu.  
All active languages are shown. To use another language, in the Designer, enable the corresponding countries. For more information, see the *One Identity Manager Configuration Guide*.
4. Enter the subject in **Subject**.
5. Edit the mail text in the **Mail definition** view with the help of the Mail Text Editor.
6. Save the changes.

### To edit an existing mail definition

1. In the Manager, select the **IT Shop > Basic configuration data > Mail templates** category.

The result list shows all the mail templates that can be used for IT Shop requests.

1. Select a mail template in the result list and run the **Change main data** task.
2. In the **Mail definition** menu, select the language for the mail definition.

**NOTE:** If the **Common | MailNotification | DefaultCulture** configuration parameter is set, the mail definition is loaded in the default language for email notifications when the template is opened.

3. Edit the mail subject line and the body text.
4. Save the changes.

## Using base object properties

In the subject line and body text of a mail definition, you can use all properties of the object entered under **Base object**. You can also use the object properties that are referenced by foreign key relation.

To access properties use dollar notation. For more information, see the *One Identity Manager Configuration Guide*.

### Example:

An IT Shop requester should receive email notification about the status of the request.

**Table 81: Email notification properties**

Property	Value
Base object	PersonWantsOrg
Subject	"\$DisplayOrg[D]\$" status change
Mail body	Dear \$FK(UID_PersonOrdered).Salutation[D]\$ \$FK(UID_PersonOrdered).FirstName\$ \$FK(UID_PersonOrdered).LastName\$, The status was changed on the following request on \$DateHead:Date\$. Requested by: \$DisplayPersonInserted\$ Requested by: \$DisplayPersonInserted\$

## Property Value

Reason: \$OrderReason\$  
Current status of your request:  
Approval: granted  
Approver: \$DisplayPersonHead[D]\$  
Reason: \$ReasonHead[D]\$

The generated email notification could look like the following, for example, once it has been formatted.

**Subject:** "Service Notebook" status change

Dear Ms Monica Fletcher.

The status was changed on the following request on 03/08/2011 11:14:53.

**Product:** Service Notebook  
**Requested by:** Fletcher, Monica  
**Reason:** For on-site processing

Current status for your request:

**Approval:** granted  
**Approver:** Rippington, Rudiger  
**Reason:** approved

## Use of hyperlinks to the Web Portal

You can add hyperlinks to the Web Portal in the mail text of a mail definition. If the recipient clicks on the hyperlink in the email, the Web Portal opens on that web page and further actions can be carried out. In the default version, this method is implemented for IT Shop requests.

### **Prerequisites for using this method**

- The **QER | WebPortal | BaseURL** configuration parameter is enabled and contains the URL path to the Web Portal. You edit the configuration parameter in the Designer.

`http://<server name>/<application>`

with:

`<server name>` = name of server

`<application>` = path to the Web Portal installation directory



### ***To add a hyperlink to the Web Portal in the mail text***

1. Click the position in the mail text of the mail definition where you want to insert a hyperlink.
2. Open the **Hyperlink** context menu and enter the following information.
  - **Display text:** Enter a caption for the hyperlink.
  - **Link to:** Select the **File or website** option.
  - **Address:** Enter the address of the page in the Web Portal that you want to open.

**NOTE:** One Identity Manager provides a number of default functions that you can use to create hyperlinks in the Web Portal.
3. To accept the input, click **OK**.

## **Default functions for creating hyperlinks**

Several default functions are available to help you create hyperlinks. You can use the functions directly when you add a hyperlink in the mail body of a mail definition or in processes

### **Direct function input**

You can reference a function when you add a hyperlink in the **Address** field of the **Hyperlink** context menu.

`$Script(<Function>)$`

Example:

`$Script(VI_BuildITShopLink_Show_for_Requester)$`

### **Default functions for IT Shop requests**

The `VI_BuildITShopLinks` script contains a collection of default functions for composing hyperlinks to directly grant or deny approval of IT Shop requests from email notifications.

**Table 82: Functions of the `VI_BuildITShopLinks` script**

<b>Function</b>	<b>Usage</b>
<code>VI_BuildITShopLink_Show_for_Approver</code>	Opens the overview page for request approval in the Web Portal.
<code>VI_BuildITShopLink_Show_for_Requester</code>	Opens the overview page for requests in the Web Portal.
<code>VI_BuildITShopLink_Approve</code>	Approves a request and opens the approvals page in the Web Portal.

Function	Usage
VI_BuildITShopLink_Deny	Denies a request and opens the approvals page in the Web Portal.
VI_BuildITShopLink_AnswerQuestion	Opens the page for answering a question in the Web Portal.
VI_BuildITShopLink_Reject	Opens the page with denied requests in the Web Portal.
VI_BuildITShopLink_Pending	Opens the page with pending requests in the Web Portal.
VI_BuildITShopLink_Unsubscribe	Creates the link for canceling email notification. This function is used in processes for unsubscribing email notifications.

## Customize email signatures

Configure the email signature for mail templates using the following configuration parameters. Edit the configuration parameters in the Designer.

**Table 83: Configuration parameters for email signatures**

Configuration parameter	Description
Common   MailNotification   Signature	Data for the signature in email automatically generated from mail templates.
Common   MailNotification   Signature   Caption	Signature under the salutation.
Common   MailNotification   Signature   Company	Company name.
Common   MailNotification   Signature   Link	Link to the company's website.
Common   MailNotification   Signature   LinkDisplay	Display text for the link to the company's website.

VI\_GetRichMailSignature combines the components of an email signature according to the configuration parameters for use in mail templates.

# Copying IT Shop mail templates

## *To copy a mail template*

1. In the Manager, select the **IT Shop > Basic configuration data > Mail templates** category.  
The result list shows all the mail templates that can be used for IT Shop requests.
2. Select the mail template that you want to copy in the result list and run the **Change main data** task.
3. Select the **Copy mail template** task.
4. Enter the name of the new mail template in the **Name of copy** field.
5. Click **OK**.


# Displaying IT Shop mail template previews

## *To display a mail template preview*

1. In the Manager, select the **IT Shop > Basic configuration data > Mail templates** category.  
The result list shows all the mail templates that can be used for IT Shop requests.
2. Select a mail template in the result list and run the **Change main data** task.
3. Select the **Preview** task.
4. Select the base object.
5. Click **OK**.

# Deleting IT Shop mail templates

## *To delete a mail template*

1. In the Manager, select the **IT Shop > Basic configuration data > Mail templates** category.  
The result list shows all the mail templates that can be used for IT Shop requests.
2. Select the template in the result list.
3. Click  in the result list.
4. Confirm the security prompt with **Yes**.

# Custom notification processes

Set up customized processes to send more email notifications within a request. For detailed information, see the *One Identity Manager Configuration Guide*.

You can use following events for generating processes.

**Table 84: PWOHelperPWO object events**

Event	Triggered by
DecisionRequired	Creating a new request.
Remind	Sequence of reminder intervals.

## Request templates

If you want to request products in the Web Portal, select the products you want from a service catalog and place them in the cart. The products remain in the cart until you send the request. You can save all the products in your cart or just individual ones in a request template so that you can reuse the products in the cart for future requests. You can add or delete products to request templates at anytime.


### **To use a request template**

- In the Designer, set the **QER | ITShop | ShoppingCartPattern** configuration parameter.

You can create request templates in the Web Portal and in the Manager. In the following you will learn how to set up request templates with the Manager. For more information about how to set up request templates in the Web Portal, see the *One Identity Manager Web Designer Web Portal User Guide*.

## Creating and modifying request templates

### **To edit a request template**

1. In the Manager, select the **IT Shop > Request templates** category.
2. In the result list, select a request template and run the **Change main data** task.  
- OR -  
Click  in the result list.
3. Edit the request template's main data.
4. Save the changes.

## Detailed information about this topic

- [General main data of a request template](#) on page 229
- [Cart items](#) on page 230

# General main data of a request template

Enter the following properties on the **General** tab.

**Table 85: General main data of a request template**

Property	Description
Request template	Name of the request template.
Name	Any additional name for the request template.
Short name	Short name for the request template.
Voucher number	A combination of any characters to uniquely identify the request template. If you leave this field empty, One Identity Manager automatically allocates a number when you save.
Owner	Owner of the request template. The employee that created the template is automatically entered as the owner. This value can be changed at any time.
Description	Text field for additional explanation.
Public template	Specifies whether the request template is available to all One Identity Manager users.
Shared	<p>Specifies whether the request template is can be used by all One Identity Manager users. This option can only be changed in the Manager through the user with the <b>Request &amp; Fulfillment   IT Shop   Administrators</b> application role.</p> <p>If <b>Public template</b> is not set on a shared template, <b>Shared</b> is also disabled.</p>

Request templates can be automatically share once **Public template** has been set.

### ***To automatically share request templates***

- In the Designer, set the **QER | ITShop | ShoppingCartPattern | AutoQualified** configuration parameter.

# Cart items



Use **Cart items** to assign the product.

## **To add a new request item to the request template**

- Click .


The data fields for entering properties are shown.

**Table 86: Cart items**

Property	Description
product	<p>Products that can be requested with this request template. All service items are shown in the menu, whose products are assigned to at least one shelf in the IT Shop.</p> <ul style="list-style-type: none"><li>• To add other products to the request template, click .</li><li>• To delete a cart item, click .</li></ul>
Quantity	<p>Number of products to request.</p> <p>You need to customize your Web Portal in order to use these values. For detailed information, see <i>One Identity Manager Web Designer Reference Guide</i>.</p>
Additional request data	<p>Additional information is required for the request.</p>

# Deleting request templates

## **To delete a request template**

1. In the Manager, select the **IT Shop > Request templates** category.
2. Select a request template in the result list.
3. Click  in the result list.

**NOTE:** Every owner can delete his own request templates in the Web Portal. One Identity Manager users with the **Request & Fulfillment | IT Shop | Administrators** application role can delete the request templates of all owners.

# Recommendations and tips for transporting IT Shop components with the Database Transporter

For detailed about working with change labels and about transporting changes with the Database Transporter, see the *One Identity Manager Operational Guide*.

To transport IT Shop components with the Database Transporter, take the following into account:

- In one transport package, only include a maximum of one shop with shelves and customer nodes including the dynamic roles and, if necessary, associated approval policies.
- You should not transport products that reference target system entitlements. Target system entitlements are loaded into the database by synchronization and obtain different UIDs in different databases. This means that references to these entitlements do not match up in the products.
- Approval policies, approval workflows, approval steps, and approval procedures should be transported together. If necessary, mail templates and mail definitions must be transported as well.
- If IT Shop components reference application or business roles, they must also be transported along with their child roles.
- Transport translations if required.
- If you want to group several objects and dependencies and other changes into a transport package, work with change labels where possible. In the Database Transporter, you can export change labels to a transport package. You can import the transport package with the Database Transporter.
- Alternatively, you can transport a single object with its dependencies by creating an export in transport format. Then you can import the export with the Database Transporter.

# Troubleshooting errors in the IT Shop

## Timeout on saving requests

If new requests are saved in bulk in the database a timeout may occur, after importing data, for example.

### Probable reason

By default, the approvers responsible are determined during saving. This delays the saving process. No more actions can take place in One Identity Manager until all requests are saved and, therefore, all approvers have been found. Depending on the system configuration, this may cause a timeout to occur when large amounts of data are being processed.

### Solution

- In the Designer, disable the **QER | ITShop | DecisionOnInsert** configuration parameter.

### Effect

- The requests are saved and a calculation task for determining approvers is queued in the DBQueue. Approvers responsible are determined outside the save process.
- If the requester is also the approver, the approval step is not automatically granted approval. Approvers must explicitly approve their own requests. For more information, see [Automatically approving requests](#) on page 134.
- Automatic approval decisions are also met if necessary, but are delayed. This affects requests with self-service, for example.



# Bulk delegation errors

You have the option to delegate all your responsibilities to one person in the Web Portal. If you have a lot of responsibilities, it is possible that not all the delegations are carried out. A delegator can send a notification to themselves if an error occurs.

## Probable reason

An error occurred processing delegations. VI\_ITShop\_Person Mass Delegate was stopped, although only a fraction of the delegations has been applied.

## Solution

1. Configure the notification procedure.
2. Run all remaining delegations again in the Web Portal.

## Related topics

- [Bulk delegation notifications](#) on page 178

# Process monitoring for requests

For more information about process monitoring in One Identity Manager, see the *One Identity Manager Configuration Guide*.

## To configure process monitoring for requests

1. In the Designer, check whether the **Common | ProcessState** configuration parameter is set. If not, set the configuration parameter.  
If this configuration parameter is set, a process monitoring entry (DialogProcess table) is created when the request is created.
2. In the Designer, check the **Common | ProcessState | UseGenProcIDFromPWO** configuration parameter.  
If this configuration parameter is set, the GenProcID of an IT Shop request is retained for the entirety of the approval process.  
If the configuration parameter is not set, a new GenProcID is used for each approval decision.
3. In the Designer, check the **QER | ITShop | GenProcIDBehavior** configuration parameter  
Set the configuration parameter and use the value to specify how many GenProcIDs should be generated for a shopping cart's requests.

- **MultiID:** Generates a new GenProcID for each shopping cart request.
- **SingleID:** Generates one GenProcID for the entire shopping cart. All requests created through the shopping cart are given the same GenProcID.

If the configuration parameter is not set, a separate GenProcID is generated for each shopping cart request.

## Configuration parameters for the IT Shop

Additional configuration parameters for the IT Shop are available in One Identity Manager. The following table contains a summary of all applicable configuration parameters for the IT Shop.

**Table 87: Overview of configuration parameters**

Configuration parameter	Description
QER   ITShop	<p>Preprocessor relevant configuration parameter to control the component parts for the IT Shop. If the parameter is set, the IT Shop components are available. Changes to this parameter require the database to be recompiled.</p> <p>If you disable the configuration parameter at a later date, model components and scripts that are not longer required, are disabled. SQL procedures and triggers are still carried out. For more information about the behavior of preprocessor relevant configuration parameters and conditional compiling, see the <i>One Identity Manager Configuration Guide</i>.</p>
QER   ITShop   AutoCloseInactivePerson	This configuration parameter defines whether employees are removed from all customer nodes when they are permanently disabled.
QER   ITShop   AutoDecision	This configuration parameter controls automatic approval of IT Shop requests over several approval levels.
QER   ITShop   ChallengeRoleRemoval	General configuration parameter for dealing with role assignments that are modified by data import. Removal of role memberships can be challenged with the help of temporary requests.

Configuration parameter	Description
QER   ITShop   ChallengeRoleRemoval   DaysOfValidity	This configuration parameter contains the validity period (in days) of temporary requests for challenged role memberships.
QER   ITShop   ChallengeRoleRemoval   Department	Temporary requests of department memberships are supported.
QER   ITShop   ChallengeRoleRemoval   Department   Primary	Temporary membership of the previous department is requested if changes are made to the primary membership in departments.
QER   ITShop   ChallengeRoleRemoval   ITShopOrg	This configuration parameter contains the product node that is assigned to the requested assignment resource.
QER   ITShop   ChallengeRoleRemoval   Locality	Temporary requests of location memberships are supported.
QER   ITShop   ChallengeRoleRemoval   Locality   Primary	Temporary membership of the previous location is requested if changes are made to the primary membership in locations.
QER   ITShop   ChallengeRoleRemoval   Org	Temporary requests of business role memberships are supported.
QER   ITShop   ChallengeRoleRemoval   Org   Primary	Temporary membership of the previous business role is requested if changes are made to the primary membership in business roles.
QER   ITShop   ChallengeRoleRemoval   ProfitCenter	Temporary requests of cost center memberships are supported.
QER   ITShop   ChallengeRoleRemoval   ProfitCenter   Primary	Temporary membership of the previous cost center is requested if changes are made to the primary membership in cost centers.
QER   ITShop   DecisionOnInsert	This configuration parameter controls approval of a request the moment is it added.
QER   ITShop   DefaultSenderAddress	<p>Sender's default email address for sending automatically generated notifications about requests. Replace the default address with a valid email address.</p> <p>Syntax:</p> <p>sender@example.com</p> <p>Example:</p> <p>NoReply@company.com</p> <p>You can enter the sender's display name in</p>

Configuration parameter	Description
	<p>addition to the email address. In this case, ensure that the email address is enclosed in chevrons (&lt;&gt;).</p> <p>Example:</p> <p>One Identity &lt;NoReply@company.com&gt;</p>
QER   ITShop   Delegation	<p>Preprocessor relevant configuration parameter for controlling model components for delegation and role membership. Changes to the parameter require recompiling the database. If the parameter is set, delegation components are available.</p> <p>If you disable the configuration parameter at a later date, model components and scripts that are not longer required, are disabled. SQL procedures and triggers are still carried out. For more information about the behavior of preprocessor relevant configuration parameters and conditional compiling, see the <i>One Identity Manager Configuration Guide</i>.</p>
QER   ITShop   DeleteClosed	This configuration parameter specifies whether closed requests are deleted.
QER   ITShop   DeleteClosed   Aborted	This configuration parameter specifies the maximum retention time (in days) of canceled requests.
QER   ITShop   DeleteClosed   Dismissed	This configuration parameter specifies the maximum retention time (in days) of denied requests.
QER   ITShop   DeleteClosed   Unsubscribed	This configuration parameter specifies the maximum retention time (in days) of canceled requests.
QER   ITShop   ExceededValidUntilUnsubscribe	<p>The configuration parameter specifies whether requests of limited validity are unsubscribed or canceled once their limit is exceeded. If the parameter is set and the request has the status <b>Assigned</b> or <b>Renewal</b>, the request is unsubscribed if not other request exist for the product that is currently in effect. Expired requests with the status <b>Unsubscription</b> and <b>Unsubscribed</b> are no longer taken into account. Expired requests with the status <b>approved</b>, <b>pending</b>, <b>request</b> are canceled. If the parameter is not</p>

Configuration parameter	Description
	set, the request will be canceled in any case.
QER   ITShop   GapBehavior	Defines behavior when checking the validity period of new requests.
QER   ITShop   GapBehavior   GapDefinition	This configuration parameter specifies which requests are checked.
QER   ITShop   GapBehavior   GapFitting	This configuration parameter specifies whether validity periods of two or more pending requests can overlap.
QER   ITShop   GenProcIDBehavior	This configuration parameter specifies how many GenProcIDs should be generated for a shopping cart's requests. If the configuration parameter is not set, a separate GenProcID is generated for each shopping cart request.
QER   ITShop   GroupAutoPublish	<p>Preprocessor relevant configuration parameter for automatically adding groups to the IT Shop. This configuration parameter specifies whether all Active Directory and SharePoint target system groups are automatically added to the IT Shop. Changes to this parameter require the database to be recompiled.</p> <p>If you disable the configuration parameter at a later date, model components and scripts that are not longer required, are disabled. SQL procedures and triggers are still carried out. For more information about the behavior of preprocessor relevant configuration parameters and conditional compiling, see the <i>One Identity Manager Configuration Guide</i>.</p>
QER   ITShop   LimitOfNodeCheck	Maximum number of product nodes that can be generated or deleted by a DBQueue Processor run. Once this number is exceeded, a task for generating the rest of the nodes is queued in the DBQueue.
QER   ITShop   MailApproval   Account	Name of the user account for authenticating the mailbox used for approval by mail.
QER   ITShop   MailApproval   AppID	Exchange Online application ID for authentication with OAuth 2.0. If the value is not set, the <b>Basic</b> or the <b>NTLM</b> authentication method is used.
QER   ITShop   MailApproval	Specifies the way emails are deleted from the

Configuration parameter	Description
DeleteMode	inbox.
QER   ITShop   MailApproval   Domain	Domain of the user account for authenticating the mailbox used for approval by mail.
QER   ITShop   MailApproval   ExchangeURI	URL of the Microsoft Exchange web service for accessing the mailbox. If this is not given, AutoDiscover mode is used to detect the URL.
QER   ITShop   MailApproval   Inbox	Microsoft Exchange mailbox to which approvals by mail are sent.
QER   ITShop   MailApproval   Password	Password of the user account for authenticating the mailbox used for approval by mail.
QER   ITShop   MailTemplateIdents   AnswerToApprover	This mail template is used to send a notification with an answer to a question from an approver.
QER   ITShop   MailTemplateIdents   InformAddingPerson	This mail template is used to notify approvers that an approval decision has been made for the step they added.
QER   ITShop   MailTemplateIdents   InformDelegatingPerson	This mail template is used to notify approvers that an approval decision has been made for the step they delegated.
QER   ITShop   MailTemplateIdents   ITShopApproval	Mail template used for requests made through "Approval by mail".
QER   ITShop   MailTemplateIdents   QueryFromApprover	This mail template is used to send a notification with a question from an approver to an employee.
QER   ITShop   MailTemplateIdents   RequestApproverByCollection	This mail template is used for generating an email when there are pending requests for an approver. If this configuration parameter is not set, a "Mail template demand" or "Mail template reminder" for single approval steps can be entered to send an email for each request. If this configuration parameter is set, single mails are not sent.
QER   ITShop   OnWorkflowAssign	This configuration parameter specifies how pending orders are handled when an approval, change, or cancellation workflow is reassigned to the approval policy.
QER   ITShop   OnWorkflowUpdate	This configuration parameter specifies how pending orders are handled when the approval workflow is changed.

Configuration parameter	Description
QER   ITShop   PeerGroupAnalysis	This configuration parameter allows automatic approval of requests by peer group analysis.
QER   ITShop   PeerGroupAnalysis   ApprovalThreshold	This configuration parameter defines a threshold for peer group analysis between 0 and 1. The default value is 0.9.
QER   ITShop   PeerGroupAnalysis   CheckCrossfunctionalAssignment	This configuration parameter specifies whether functional areas should be taken into account in peer group analysis. If the parameter is set, the request is only approved if the request's recipient and the requested product belong to the same functional area.
QER   ITShop   PeerGroupAnalysis   IncludeManager	This configuration parameter specifies whether employees can be added to the peer group who have the same manager as the request's recipient.
QER   ITShop   PeerGroupAnalysis   IncludePrimaryDepartment	This configuration parameter determines whether employees who are primary members of the primary department of the request's recipient are included in the peer group.
QER   ITShop   PeerGroupAnalysis   IncludeSecondaryDepartment	This configuration parameter determines whether employees who are a secondary members of the primary or secondary department of the request's recipient are included in the peer group.
QER   ITShop   PersonInsertedNoDecide	This configuration parameter specifies whether the employee that triggered the request may approve it.
QER   ITShop   PersonOrderedNoDecide	This configuration parameter specifies whether the employee for whom the request was triggered, may approve it.
QER   ITShop   PersonInsertedNoDecideCompliance	This configuration parameter specifies whether the employee who initiated the request can issue exception if compliance rules are violated by the request.
QER   ITShop   PersonOrderedNoDecideCompliance	This configuration parameter specifies whether the employee for whom the request was initiated can issue exception if compliance rules are violated by the request.
QER   ITShop   ReducedApproverCalculation	This configuration parameter specifies, which approval steps are recalculated if the IT Shop



Configuration parameter	Description
	approver must be recalculated.
QER   ITShop   ReplaceAssignmentRequestOnLeaveCU	If an employee leaves a customer node, all assigned requests are canceled and assignment requests are converted to direct assignments. If this parameter is set, then assignment requests can be transferred to the manager or central approver group, and to the UID_PersonFallback if necessary. (Note: These employees must have approval authorization for this assignment).
QER   ITShop   ReplaceAssignmentRequestOnLeaveCU   UID_PersonFallback	UID_Person is an employee who is set as the fallback if no other request recipient can be found for an assignment request. This employee must be a customer in all shops in which assignments can be requested.
QER   ITShop   ReuseDecision	This configuration parameter specifies if approval granted by one approver to all approval steps of an approval process is transferred. If the parameter is set, the current step is approved if an approval step is reached in the approval process for which an employee with approval authorization has already granted approval. If the parameter is not set, the approver must separately approve each step for which they have approval authorization. If approval has not been granted, it is not transferred.
QER   ITShop   ShoppingCartPattern	This configuration parameter specifies whether request templates can be used in the IT Shop.
QER   ITShop   ShoppingCartPattern   AutoQualified	This configuration parameter specifies whether public request templates are automatically labeled as "shared" or whether they have to be manually shared by a manager.
QER   ITShop   ShowClosedAssignmentOrders	<p>This configuration parameter specifies whether the manager of an organization or business role can view completed assignment requests for their organization or business role.</p> <p>If this parameter is not set, the manager can only view open assignment requests for their organization or business role.</p>
QER   ITShop   Templates	Preprocessor relevant configuration parameter

Configuration parameter	Description
	<p>for controlling the database model components for the Shelf Filling Wizard. Changes to the parameter require recompiling the database. Shelf templates can be used. Changes to this parameter require the database to be recompiled.</p> <p>If you disable the configuration parameter at a later date, model components and scripts that are not longer required, are disabled. SQL procedures and triggers are still carried out. For more information about the behavior of preprocessor relevant configuration parameters and conditional compiling, see the <i>One Identity Manager Configuration Guide</i>.</p>
QER   ITShop   Templates   DeleteRecursive	This configuration parameter specifies whether the recursive deletion is allowed from shelf templates. This configuration parameter is disabled by default.
QER   ComplianceCheck   DisableSelfExceptionGranting	Excludes rule violators from becoming exception approvers. If this parameter is set, no one can approve their own rule violations.
QER   ComplianceCheck   EnableITSettingsForRule	IT Shop properties for the compliance rule are visible and can be edited.
QER   Person   Defender	This configuration parameter specifies whether classic Starling Two-Factor Authentication integration is supported.
QER   Person   Starling	<p>This configuration parameter specifies whether One Identity Starling Cloud is supported.</p> <p>Initiate your subscription within your One Identity on-prem product and join your on-prem solutions to our One Identity Starling cloud platform. Giving your organization immediate access to a number of cloud-delivered microservices, which expand the capabilities of your One Identity on-prem solutions. We will continuously make available new products and features to One Identity Starling. For a free trial of our One Identity Starling offerings and to get the latest product feature updates, visit <a href="https://cloud.oneidentity.com">cloud.oneidentity.com</a>.</p>
QER   Person   Starling   UseAp-	This configuration parameter defines whether

Configuration parameter	Description
provalAnywhere	requests can be approved by Starling 2FA app.
QER   Person   Starling   UseAp-provalAnywhere   SecondsToExpire	This configuration parameter specifies the timeout in seconds after which approval by Starling 2FA app expires.
QER   WebPortal	General configuration parameter for Web Portal settings.
QER   WebPortal   BaseURL	Web Portal URL. This address is used in mail templates to add hyperlinks to the Web Portal.
QER   WebPortal   DisplayName	This configuration parameter contains the display name of the Web Portal. This name is used in mail templates.
QER   WebPortal   PasswordResetURL	Password Reset Portal URL. This address is used to navigate within the Web Portal.
QER   WebPortal   PersonChangeWorkdesk	This configuration parameter specifies whether Web Portal users can change their default workdesk. If the configuration parameter is set, users can relocate their workdesk through the Web Portal.
QER   WebPortal   ShowProductImages	This configuration parameter specifies whether pictures of products are displayed in the Web Portal.

Some general configuration parameters are also relevant for the IT Shop.

**Table 88: Additional configuration parameters**

Configuration parameter	Description
Common   MailNotification   Signature	Data for the signature in email automatically generated from mail templates.
Common   MailNotification   Signature   Caption	Signature under the salutation.
Common   MailNotification   Signature   Company	Company name.
Common   MailNotification   Signature   Link	Link to the company's website.

Configuration parameter	Description
Common   MailNotification   Signature   LinkDisplay	Display text for the link to the company's website.
Common   ProcessState	If this configuration parameter is set, a process monitoring entry (DialogProcess table) is created when the request is created.
Common   ProcessState   PropertyLog	<p>When this configuration parameter is set, changes to individual values are logged and shown in the process view. Changes to the parameter require recompiling the database.</p> <p>If you disable the configuration parameter at a later date, model components and scripts that are not longer required, are disabled. SQL procedures and triggers are still carried out. For more information about the behavior of preprocessor relevant configuration parameters and conditional compiling, see the <i>One Identity Manager Configuration Guide</i>.</p>
Common   ProcessState   UseGenProcIDFromPWO	If this configuration parameter is set, the GenProcID of an IT Shop request is retained for the entirety of the approval process. If the configuration parameter is not set, a new GenProcID is used for each approval decision.

## Request statuses

The following table gives an overview of all statuses a request can have.

**Table 89: Request statuses**


Status (technical name)	Description
New (New)	A product was requested. The request was added in the database.
Request (OrderProduct)	The request is currently in the approval process. An approval decision has not yet been reached.
Approved (Granted)	The approval process is complete. The request is granted approval.
Pending (Waiting)	The request is granted approval. A valid from date was given in the request. This date has not been reached yet.
Assigned (Assigned)	The request was granted approval and assigned.
Renewal (OrderProlongate)	The request with limited validity was assigned. A renewal has been applied for and is in the approval process. An approval decision has not yet been reached.
Unsubscription (OrderUnsubscribe)	This product was canceled. The cancellation is currently in the approval process. An approval decision has not yet been reached.
Unsubscribed (Unsubscribed)	The approval process is complete. The cancellation was granted approval.
Denied (Dismissed)	The approval process is complete. The request was denied.
Canceled (Aborted)	The request was canceled by a user or for technical reasons.

Pending requests	Requests with the status request, renewal, canceled.
Approved requests	Requests with the status approved, pending, assigned, renewal, canceled.
Assigned requests	Requests with the status assigned, renewal, canceled.
Closed requests	Requested with the status unsubscribed, denied, canceled.


## Examples of request results

Request results differ depending on whether a simple or multiple request resource or an assignment is requested. The following figures illustrate the differences.


**Figure 13: Request for a single request resource**

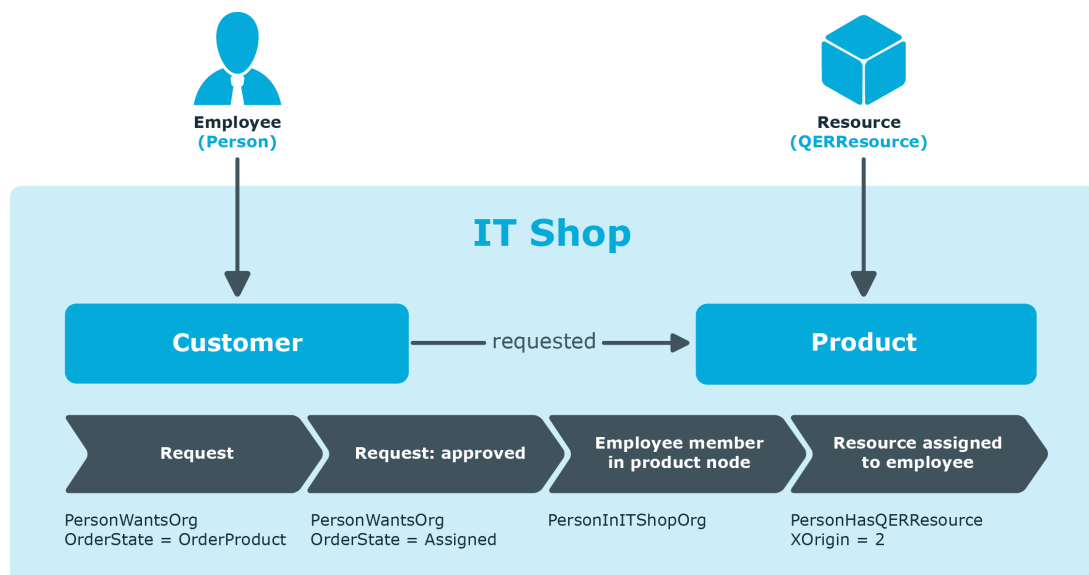

**Figure 14: Request for a multi-request resource**

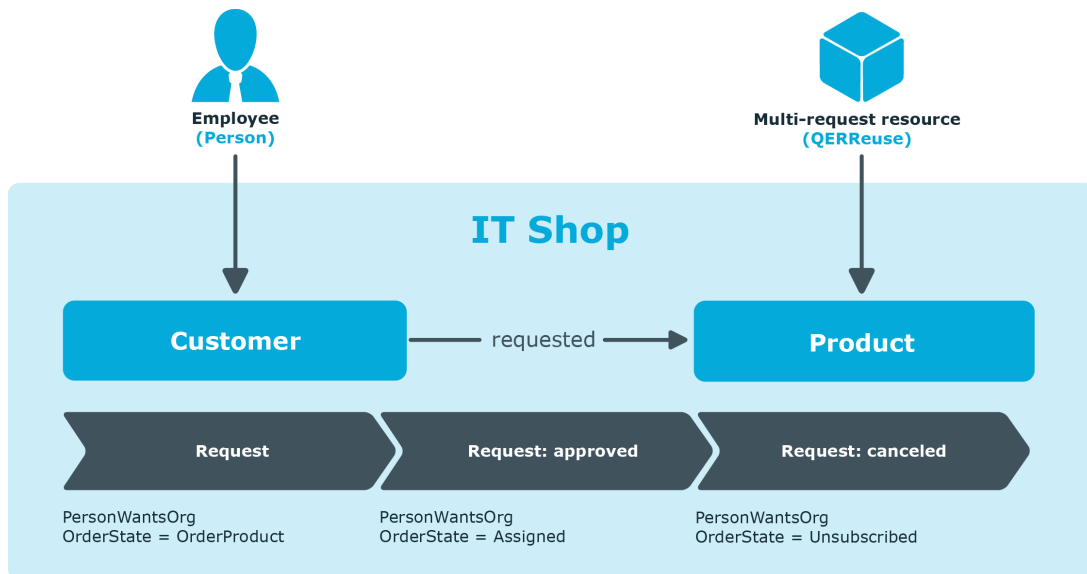


**Figure 15: Request for a requestable/unsubscribable resource**

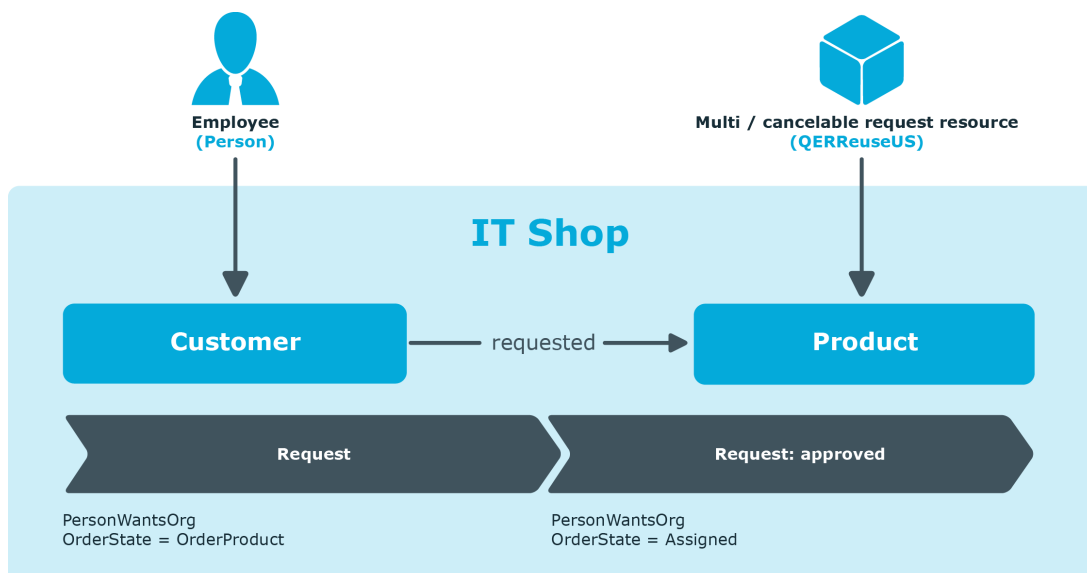




**Figure 16: Request for a department membership**

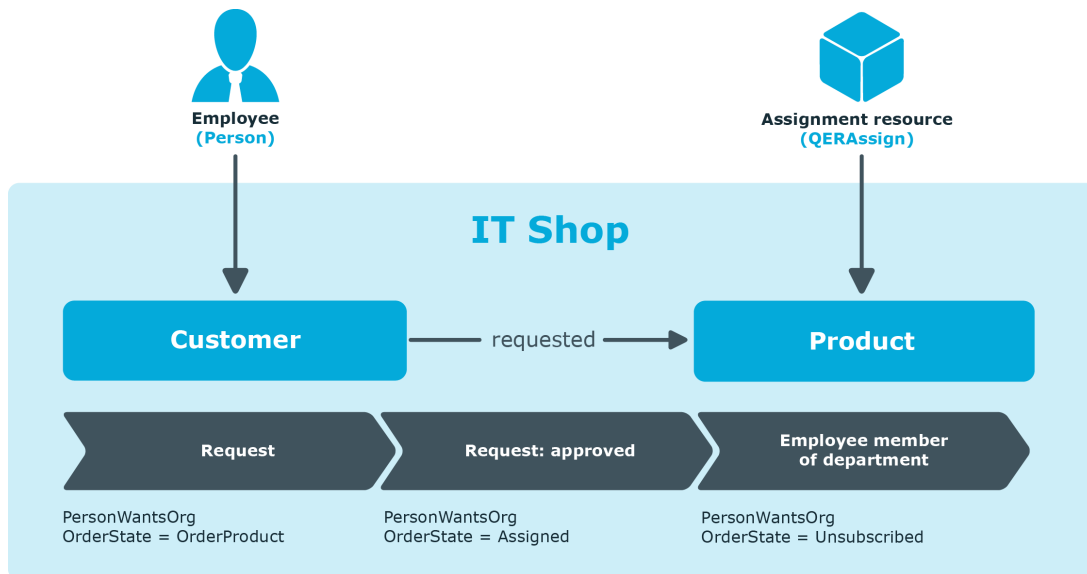

**Figure 17: Request for assignment of an Active Directory group to a department**

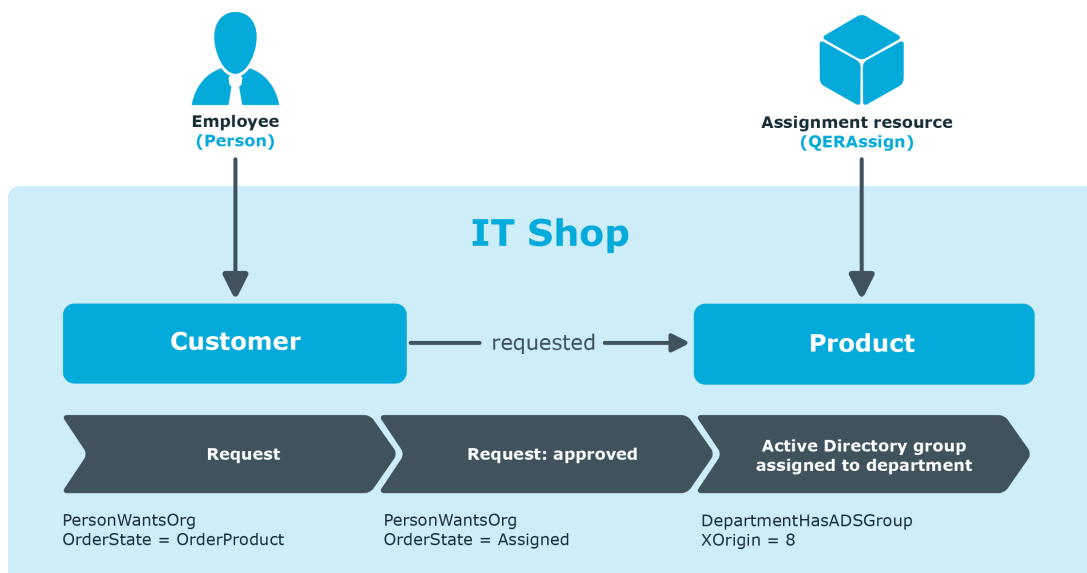

One Identity solutions eliminate the complexities and time-consuming processes often required to govern identities, manage privileged accounts and control access. Our solutions enhance business agility while addressing your IAM challenges with on-premises, cloud and hybrid environments.

## Contacting us

For sales and other inquiries, such as licensing, support, and renewals, visit <https://www.oneidentity.com/company/contact-us.aspx>.

## Technical support resources

Technical support is available to One Identity customers with a valid maintenance contract and customers who have trial versions. You can access the Support Portal at <https://support.oneidentity.com/>.

The Support Portal provides self-help tools you can use to solve problems quickly and independently, 24 hours a day, 365 days a year. The Support Portal enables you to:

- Submit and manage a Service Request
- View Knowledge Base articles
- Sign up for product notifications
- Download software and technical documentation
- View how-to videos at [www.YouTube.com/OneIdentity](http://www.YouTube.com/OneIdentity)
- Engage in community discussions
- Chat with support engineers online
- View services to assist you with your product

## A

- administrator 12
- application role
  - administrator 12
  - attestors 197
  - chief approval team 120, 195
  - clean up 78
  - delete 78
  - delete obsolete product owner 78
  - product owners 12, 196
- approval 94
- approval level
  - connect 94
  - edit 88
- approval policies
  - approval workflow 81-82
  - assign 202, 216
  - cancellation workflow 81
  - create 80
  - determine 97
  - effective 97
  - mail template 81
  - overview form 82
  - priority 81
  - renewal workflow 81
  - role type 81
  - validity check 82
  - verify 83
- approval procedure 89, 99
  - Active Directory group product owner and additional owner 106
  - add 115
  - additional owner of the Active Directory group 106
  - approvals made externally 113
  - attestor assigned service item 106
  - calculated approval 112
  - Complianceprüfung (vereinfacht) 124
  - condition 117
  - copy 119
  - custom 115
  - delete 120
  - escalation 141
  - exception approver for worst rule violation 126
  - manager of cost center provided in request 109
  - manager of department in request 110
  - manager of recipient's cost center 104
  - manager of recipient's department 104
  - manager of shelf's cost center 103
  - manager of shelf's department 103
  - manager of shop's cost center 103
  - manager of shop's department 103
  - manager of shopping center's cost center 103
  - manager of shopping center's department 103
  - manager of the requested business role or organization 110
  - members of a certain role 105
  - named approvers of cost center provided in request 107, 109

- named approvers of department provided in request 110
- named approvers of recipient's cost center 107
- named approvers of recipient's location 107
- named approvers of recipient's primary role 107
- named IT approvers of cost center provided in request 109
- named IT approvers of department provided in request 110
- named IT approvers of recipient's cost center 107
- named IT approvers of recipient's department 107
- named IT approvers of recipient's location 107
- named IT approvers of recipient's primary role 107
- owner of the requested privileged access request 106
- product owners 105
- query 117
- recipient's manager 104
- self-service 103
- shelf owner 103
- shop owner 103
- shopping center owner 103
- specific role Manager 105
- target system manager of the requested system entitlement 107
- violation rule exception approver 126
- waiting for further approval 111
- approval process 80, 82, 96
- approval reason 189
- approval step
  - approval procedure 89
  - edit 89
  - escalation 141
  - mail template 89
  - relevance for compliance 89
  - reminder interval 89
  - rule check 89
  - timeout behavior 89
  - timeout interval 89
- approval workflow
  - copy 95
  - delete 96
  - overview form 95
  - renewal 98
  - set up 84
  - system halt 87
  - timeout interval 87
  - unsubscribe 98
- approver
  - approval by email 178
  - approve by Starling 2FA 182
  - approving own request 132
  - notification 169, 171, 175-176
  - recalculate 120
  - restrictions 132
  - select 99
- assignment request 57
  - approver 62
  - convert to direct assignment 64
  - grant approval 62
  - obtain 66
  - prepare 58
  - remove recipient from customer node 64
  - service item 58
  - unsubscribe 64

- assignment resource 58
  - add 62
  - assign shelf 68
  - for a business role 59
  - for an application role 60
  - overview form 68
  - remove from shelf 69
  - resource type 66
  - risk index 66
  - service item 66

## B

- business partner 192
- business role
  - assign service item 28

## C

- cancellation workflow 98, 161, 168
- cart item 230
- change of manager 165
- chief approval team 120, 195
- comparison value 122
- connector
  - on approval 94
  - on escalation 94
  - on rejection 94
  - on reroute 94
- cost center
  - assign service item 28-29
- create product nodes 53
- cross-functional product 137-138
- currency 26
- customer
  - delete 208

- dynamic assignments 206
  - relocate 46, 64, 163
- customer node
  - delete 208
  - direct employee assignment 206
  - new 204
  - overview form 205
  - remove employee 64
  - set up 204

## D

- decision
  - by peer group 137-138
- default approval policy 82
- default approval workflow 96
- default assignment resources 68
- default mail template 178
- default service category 37
- default service item 26
- delayed decision 111
- delegation 57
  - approval notification 172
  - assignment resource 63
  - error 178
  - notification 176, 178
  - prepare 63
- deny 94
- department
  - assign service item 28-29
- dynamic role
  - customer node 206

## E

- email notification
  - set up 168
- employee
  - assign to customer node 206
  - transform existing assignment in request 71
- escalation 94
- exception approver 126
  - approving own request 129
  - limit 129
  - on self-service 132
- expiry date 159-161, 171
- extended property
  - assign service item 30

## F

- fallback approver 143
- functional area 194
  - assign service item 29

## G

- GenProcID 233
- going live with an IT Shop 14
- group
  - add to IT Shop (automatic) 75, 78

## I

- Identity Lifecycle 14
- IT Shop
  - approval process 80
  - edit 186
- IT Shop structure 198

## L

- location
  - assign service item 28-29

## M

- mail template
  - approval policies 81
  - approval step 89
  - base object 221, 223
  - confidentiality 221
  - design type 221
  - edit 220
  - hyperlink 224
  - importance 221
  - language 222
  - mail definition 222
  - report 221
  - target format 221
  - unsubscribe 221
- manufacturer 192
- Multi-factor authentication 56

## N

- notification
  - approval 172, 176
  - default mail template 178
  - delegation 176
  - demand 169, 175
  - deny 172, 176
  - deny approval 175
  - escalation 174
  - expiry 171
  - mail template 168

- on delegation 172
- product change 177
- query 175
- quit 174
- recipient 168
- refuse approval 175
- reject approval 175
- reminder 169
- renewal 177
- sender 168
- unsubscribe 177

## P

- peer group analysis
  - configure for request 138
  - for request 137
- price 26
- processing status 188
- product 16
  - assign 53, 203
  - assign to template 216
  - change 31, 55
  - cross-functional 137-138
  - dependent 33
  - documentation 26
  - move 55
  - multi requestable 19
  - not available 48
  - prepare 21
  - relocate 46, 55, 163
  - remove 54
  - replace 31, 55
  - report 34
  - service item 21-22
  - terms of use 48

- unsubscribe 168
- validity period 46
- product owners 12, 75, 78
  - clean up 78
  - delete 78
  - delete unused application role 78

## R

- reason 189
- renewal
  - approver 98
- renewal workflow 98, 160
- request
  - approval by mail 178
  - approval by Starling 2FA 182
  - approval history 157
  - approval sequence 156
  - approve automatically 134, 144
  - approved 245
  - assigned 245
  - assignment request 57
    - unsubscribe 64
  - by approver 132
  - cancel 167, 184
  - change approval workflow 163
  - close pending 163
  - closed 184, 245
  - copy existing assignment 69
  - delegation 57
  - delete 184
  - details 156
  - escalate 141
  - expiry date 159-161, 171
  - extend 160
  - for employees 165

- monitor 233
- multi-request 158
- new manager 165
- notification 168, 171
- open 245
- overview 156
- query 139
- quit 55, 146
- reject approval 163
- relocate 163
- role 57, 183
- sequence 154
- status 245
- timeout 141, 144, 146
- unsubscribe 161, 168
- validity period 159, 161
- withdraw 167
- request parameter 39
  - settings 41
- request procedure
  - archiving 184
  - record 184
- request property
  - copy 45
  - log 39
  - main data 41
- request recipient
  - accept terms of use 149
  - notification 177
- request status 245
- request template 228
  - administrator 229
  - cart item 230
  - create 228
  - delete 230
  - product 230
  - public template 229
  - share 229
- reroute 94
- resource
  - multi requestable 19
- risk assessment 122
  - functional area 194
- risk index 66, 122
- role
  - request membership
    - automatically 183
  - transform existing assignment in
    - request 74
- role classes 191
- role type 192, 199, 214
- rule check 123
  - Complianceprüfung (vereinfacht) 124
  - find exception approver 126
  - on self-service 132

## S

- security code 56
- service catalog 26, 35, 37
- service category
  - approval policies 36
  - attestors 36
  - log 35
  - object dependent xref 38
  - process information 36
  - product owners 36
  - request property 36
- service item
  - approval policies 23
  - assign 26



- assign business role 28
- assign cost center 28-29
- assign department 28-29
- assign extended properties 30
- assign function area 29
- assign hierarchical role 28
- assign location 28-29
- assign tag 31
- attestors 23
- cost center 23
- documentation 26
- enter tag 50
- extended property 26
- image 26
- log 22
- manufacturer 23
- multi-request 23
- object dependent xref 32
- open site 30
- overview form 27
- overview of all assignments 34
- parent 27
- product description 30
- product owners 23
- relocate 23, 46
- replace 31
- report 34
- request property 23
- risk assessment 28
- subordinate 27
- terms of use 48
- validity 23
- validity period 46
- shelf
  - administrator 199
  - approval policies 202, 216
  - assign product 203
  - attestors 199
  - cost center 199
  - delete 208
  - department 199
  - deputy 199
  - location 199
  - overview form 202
  - role type 199
  - set up 199
- shelf filling wizard 217
- shelf template
  - administrator 214
  - assign 199, 217
  - assign product 216
  - attestors 214
  - cost center 214
  - create 213-214
  - delete 218
  - delete shelf 208
  - department 214
  - deputy 214
  - global 210, 213
  - location 214
  - role type 214
  - special 210, 213
- shop
  - administrator 199
  - approval policies 202
  - attestors 199
  - cost center 199
  - delete 209
  - department 199
  - deputy 199

- location 199
- overview form 202
- set up 199
- shopping center
  - administrator 199
  - approval policies 202
  - attestors 199
  - cost center 199
  - delete 210
  - department 199
  - deputy 199
  - location 199
  - overview form 202
  - set up 199
  - shelf template 199
- shopping center template 210
  - assign 217
  - create 213
  - delete 218
- standard reason 189
  - usage type 190
- Starling 2FA 56
- Starling Two-Factor Authentication 56
- status
  - request 245

## T

- tag 50
  - assign service item 31, 51
  - create 31
  - overview form 51
- template
  - request template 228
  - shelf template 210

- terms of use 48
  - accept 149
  - assign service item 49
  - overview form 49

## U

- unsubscribe
  - approver 98
- user account
  - transform existing assignment in request 72

## V

- valid from date 159
- valid until date 159
- validity period
  - verify 161

## W

- Web Portal for Application Governance 16
- workdesk
  - transform existing assignment in request 73
- Workflow Editor 84